-

JMSH040SPE7Q

Features

- Ultra-low ON-resistance, $R_{DS(ON)}$
- Low Gate Charge
- 100% UIS Tested
- 100% Vds Tested
- Halogen-free; RoHS-compliant
- AEC-Q101 Qualified


Applications

- Load Switch
- PWM Application
- General Automotive Application


Product Summary

Parameters	Value	Unit
V_{DSS}	40	V
$V_{GS(th)_Typ}$	2.8	V
I_D(@V_{GS}=10V)	415	A
$R_{DS(ON)_Typ}$(@V_{GS}=10V)	0.9	m

RoHS

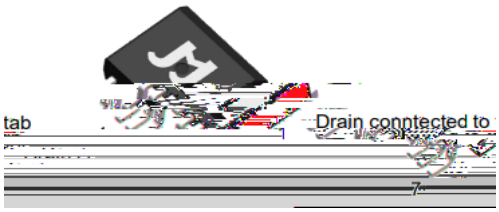

TO-263 -7L



Schematic Diagram

Ordering Information

Device	Marking	MSL	Form	Package	Reel(pcs)	Per Carton (pcs)
JMSH040SPE7Q-13	SH040SPQ	1	Tape&Reel	TO-263-7L	800	4000

Absolute Maximum Ratings (@ T_C = 25°C unless otherwise specified)

Symbol	Parameter		Value	Unit
V_{DS}	Drain-to-Source Voltage		40	V
V_{GS}	Gate-to-Source Voltage		±20	V
I_D	Continuous Drain Current	T_C = 25°C	415	A
		T_C = 100°C	294	
I_{DM}	Pulsed Drain Current [1]		Refer to Fig.4	A
E_{AS}	Single Pulsed Avalanche Energy [2]		850	mJ
P_D	Power Dissipation	T_C = 25°C	375	W
		T_C = 100°C	188	
T_J, T_{STG}	Junction & Storage Temperature Range		-55 to 175	°C

Thermal Characteristics

Symbol	Parameter	Max	Unit
R	Thermal Resistance, Junction to Ambient[3]	34	°C/W
R	Thermal Resistance, Junction to Case	0.4	

All product information is copyrighted and subject to legal disclaimers.

Electrical Characteristics (T_J = 25°C unless otherwise specified)

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
Off Characteristics						
$V_{(BR)DSS}$	Drain-Source Breakdown Voltage	I_D = 250 A, V_{GS} = 0V	40	-	-	V
I_{DSS}	Zero Gate Voltage Drain Current	V_{DS} = 32V, V_{GS} = 0V	-	-	1.0	A
I_{GSS}	Gate-Body Leakage Current	V_{DS} = 0V, V_{GS} = ±20V	-	-	±100	nA
On Characteristics						
$V_{GS(th)}$	Gate Threshold Voltage	V_{DS} = V_{GS}, I_D = 250 A	2.0	2.8	3.6	V
$R_{DS(ON)}$	Static Drain-Source Ob-Resistance (4)	V_{GS} = 10V, I_D = 20A	-	0.9	1.2	m
Dynamic Characteristics						
R_g	Gate Resistance	f = 1MHz	-	1.2	-	
C_{iss}	Input Capacitance	V_{GS} = 0V, V_{DS} =20V, f = 1MHz	4818	6745	10117	pF
C_{oss}	Output Capacitance		2504	3505	5257	pF
C_{rss}	Reverse Transfer Capacitance		163	228	456	pF
Q_g	Total Gate Charge	V_{GS} = 0 to 10V V_{DS} = 20V, I_D = 20A	70	99	148	nC
Q_{gs}	Gate Source Charge		21	29	44	nC
Q_{gd}	Gate Drain("Miller") Charge		17	24	36	nC
Switching Characteristics						
$t_{d(on)}$	Turn-On DelayTime	V_{GS} = 10V, V_{DD} = 20V I_D= 20A, R_{GEN} = 3	-	23	-	ns
t_r	Turn-On Rise Time		-	28	-	ns
$t_{d(off)}$	Turn-Off DelayTime		-	52	-	ns
t_f	Turn-Off Fall Time		-	24	-	ns
Body Diode Characteristics						
I_S	Maximum Continuous Body Diode Forward Current		-	-	415	A
I_{SM}	Maximum Pulsed Body Diode Forward Current		-	-	1662	A
V_{SD}	Body Diode Forward Voltage		-		1.2	V
trr	Body Diode Reverse Recovery Time		50	70	106	ns
Qrr	Body Diode Reverse Recovery Charge		-	116	-	nC

2. E_{AS} condition: Starting T_J=25C, V_{DD}=20V, V_{GS}=10V, R_G=25ohm, L=3mH, I_{AS}=23.8A, V_{DD}=0V during time in avalanche.

2

4. Pulse Test: Pulse Width 0.5%.

All product information is copyrighted and subject to legal disclaimers.

Typical Performance Characteristics

Figure 1: Power De-rating



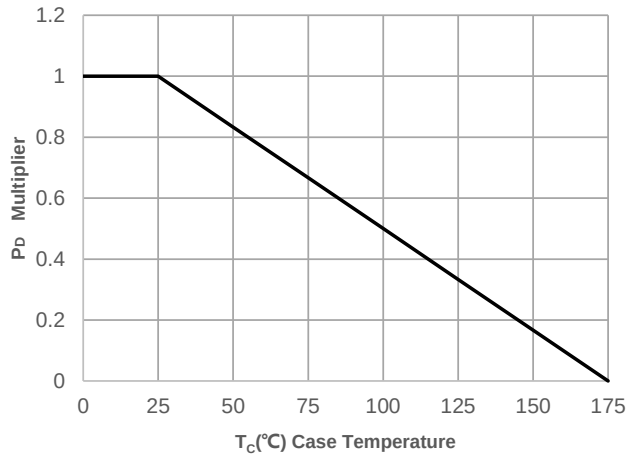


Figure 2: Current De-rating

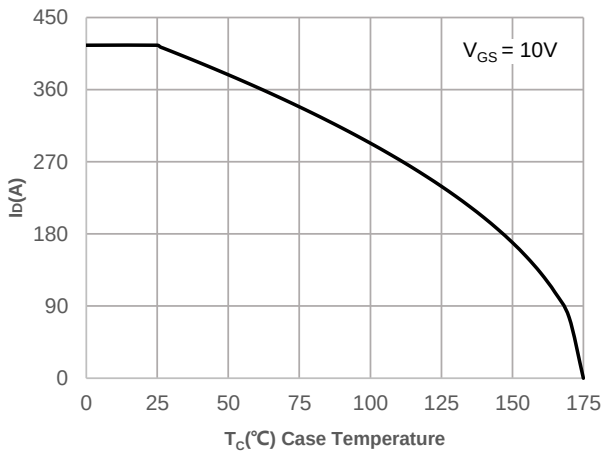

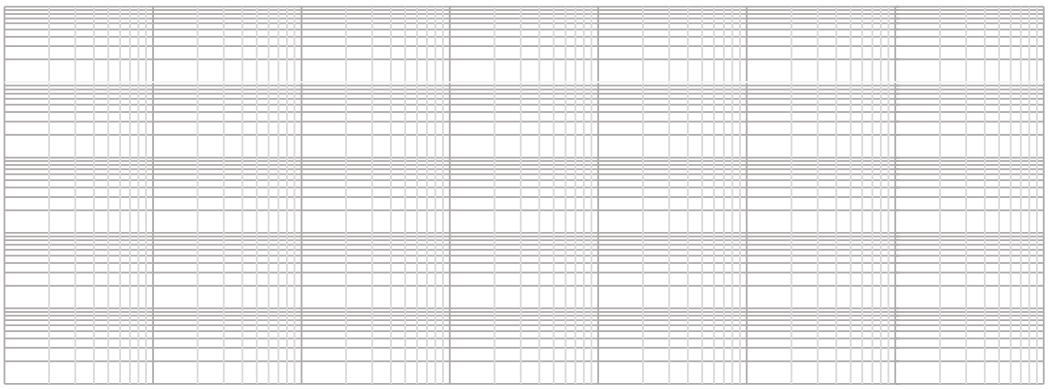

Typical Performance Characteristics

Figure 11: Normalized Breakdown voltage vs. Junction Temperature



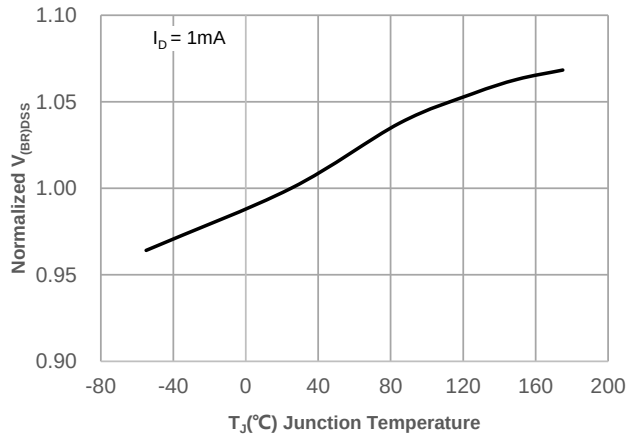


Figure 12: Normalized on Resistance vs. Junction Temperature

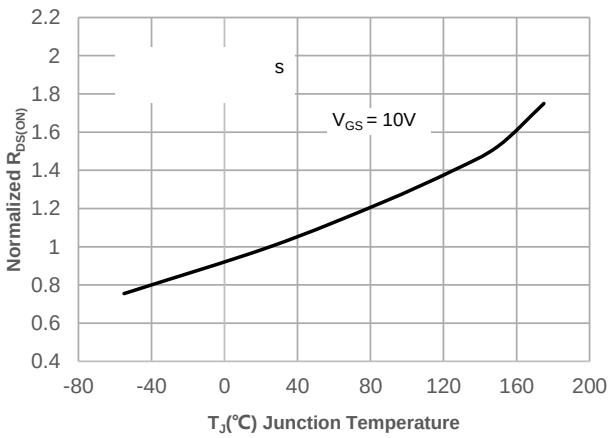

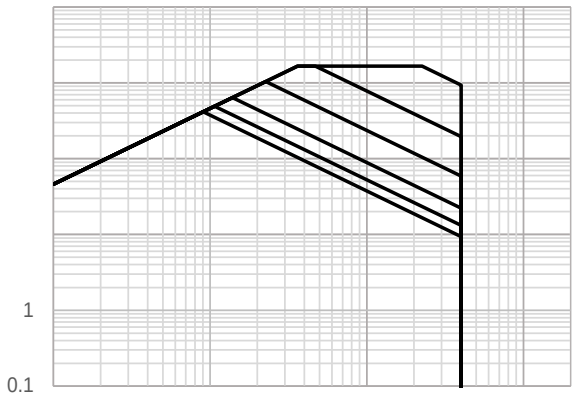

Test Circuit



Figure 1: Gate Charge Test Circuit & Waveform

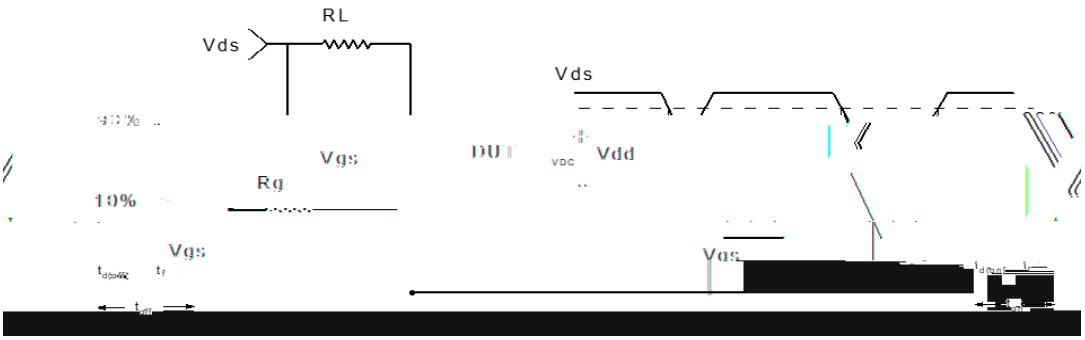


Figure 2: Resistive Switching Test Circuit & Waveform


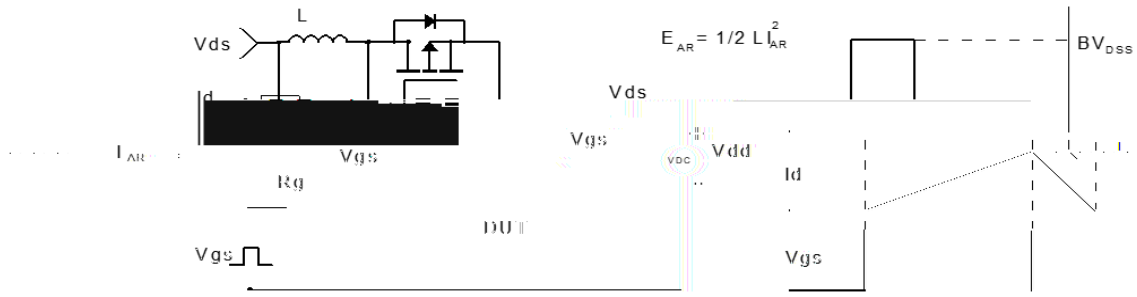


Figure 3: Unclamped Inductive Switching Test Circuit& Waveform

Figure 4: Diode Recovery Test Circuit & Waveform

All product information is copyrighted and subject to legal disclaimers.

Package Mechanical Data(TO-263 -7L)

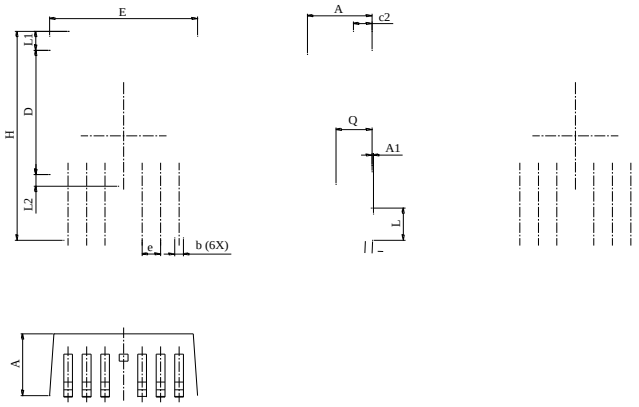

			15.88
L	1.78	2.32	2.80
L1		1.36 REF.	
L2		1.20 REF.	
L3		0.25 BSC	
Q	2.30	2.48	2.70

232.78 592.597 32.57 61.444 282047 81.92.597 32.03133 2S444 251.78 I2S33.

Information furnished in this document is believed to be accurate and reliable. However, Jiangsu JieJie Microelectronics Co.,Ltd assumes no responsibility for the consequences of use without consideration for such information nor use beyond it. Information mentioned in this document is subject to change without notice, apart from that when an agreement is signed, Jiangsu JieJie complies with the agreement. Products and information provided in this document have no infringement of patents. Jiangsu JieJie assumes no responsibility for any infringement of other rights of third parties which may result from the use of such products and information.

® is a registered trademark of Jiangsu JieJie Microelectronics Co.,Ltd.