
JST136C-600 4A TRIAC

Rev.A.1.1

DESCRIPTION:

The JST136C-600 triac is suitable for general purpose AC switching. It can be used as an ON/OFF function in applications such as heating regulation, induction motor starting circuits, for phase control operation in light dimmers, motor speed controllers. JST136C-600 snubberless triac is especially recommended for use on inductive loads. Package TO-220C is RoHS compliant.

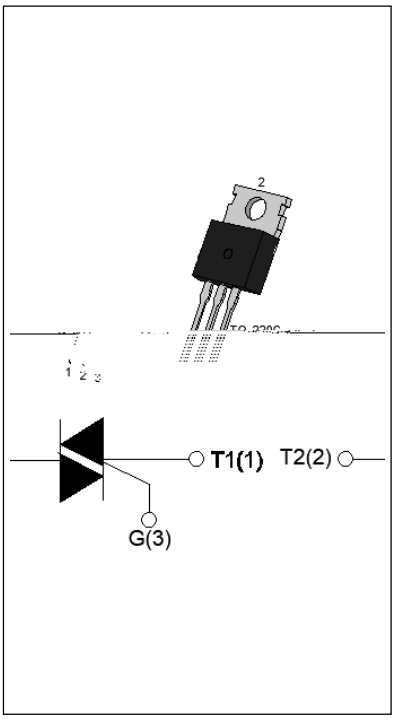

MAIN FEATURES

Symbol	Value	Unit
$I_{T(RMS)}$	4	A
V_{DRM} /V_{RRM}	600	V
I_{GT} / /	35/35/35	mA

ABSOLUTE MAXIMUM R6 -5 T 430u 4 (T)-2.IN (E)0u G (n)-4 (S)]TJ 0 Tc 0 13.086.05 0

Storage junction temperature range	T_{stg}	-40-150	
Operating junction temperature range	T_j	-40-125	
Repetitive peak off-state voltage (T_j=25)	V_{DRM}	600	V
Repetitive peak reverse voltage (T_j=25)	V_{RRM}	600	V
RMS on-state current (T_C 0108)	$I_{T(RMS)}$	4	A
Non repetitive surge peak on-state current (full cycle , t_p=20ms , T_j=25)	I_{TSM}	30	A
Non repetitive surge peak on-state current (full cycle , t_p=16.6ms , T_j=25)		33	
I^2t value for fusing (t_p=10ms , T_j=25)	I^2t	4.5	A^2s
Critical rate of rise of on-state current (I_G=2× I_{GT} , f=100Hz , T_j=125)	dI/dt	80	A s
Peak gate current (t_p=20 s , T_j=125)	I_{GM}	2	A
Average gate power dissipation (T_j=125)	$P_{G(AV)}$	0.5	W
Peak gate power	P_{GM}	5	W

JST136C-600

FIG.1: Maximum power dissipation versus RMS on-state current

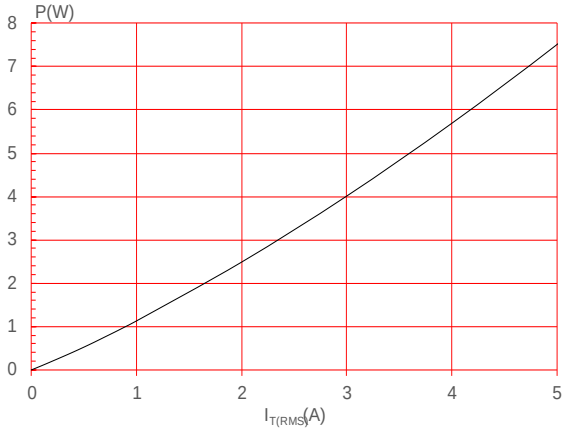


FIG.2: RMS on-state current versus case temperature


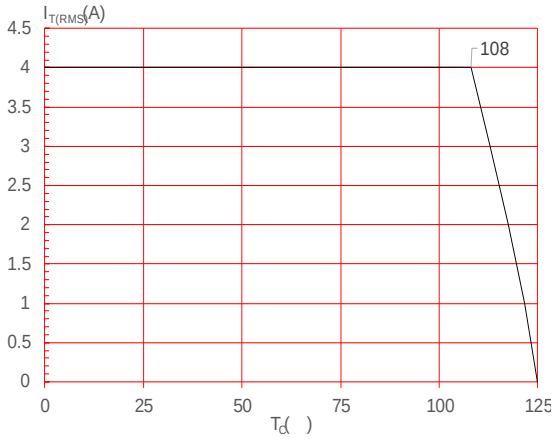


FIG.3: Surge peak on

FIG.7 ÖTest circuit for inductive and resistive loads to IEC-61000-4-5 standards



PACKAGE MECHANICAL DATA

