9 $ P 1 FKDQQHO 3RZHU 7UHQFK 026)(7

JMTC030N06D

Features

Excellent $R_{DS(ON)}$ and Low Gate Charge

100% UIS Tested

100% Vds Tested

Halogen-free; RoHS-compliant

Applications

Load Switch


PWM Application

Power Management

Product Summary

Parameters	Value	Unit
V_{DSS}	60	V
$V_{GS(th)_Typ}$	3.0	V
I_D(@V_{GS}=10V)	204	A
$R_{DS(ON)_Typ}$(@V_{GS}=10V	2.8	mΩ





TO-220-3L **Pin Assignment** **Schematic Diagram**

Ordering Information

Device	Marking	MSL	Form	Package	Tube(pcs)	Per Carton (pcs)
JMTC030N06D	JMTC030N06D	N/A	Tube	TO-220-3L	50	5000

Absolute Maximum Ratings (@ T_C = 25°C unless otherwise specified)

Symbol	Parameter		Value	Unit
V_{DS}	Drain-to-Source Voltage		60	V
V_{GS}	Gate-to-Source Voltage		±20	V
I_D	Continuous Drain Current	T_C = 25°C	204	A
		T_C = 100°C	129	
I_{DM}	Pulsed Drain Current [1]		Refer to Fig.4	A
E_{AS}	Single Pulsed Avalanche Energy [2]		653	mJ
P_D	Power Dissipation	T_C = 25°C	269	W
		T_C = 100°C	108	
T_J, T_{STG}	Junction & Storage Temperature Range		-55 to 150	°C

Thermal Characteristics


Symbol	Parameter	Max	Unit
R	Thermal Resistance, Junction to Ambient[3]	65	°C/W
R	Thermal Resistance, Junction to Case	0.5	


Electrical Characteristics (T_J = 25°C unless otherwise specified)

Symbol	Conditions	Min.	Typ.	Max.	Unit
Off Characteristics					
$V_{(BR)DSS}$		60	-	-	V
I_{DSS}		-	-	1.0	μA
I_{GSS}		-	-	±100	nA
$V_{GS(th)}$		2.11 0 0 1 53.4 632.71 Tm0 g0 G/5BT/F4 9.72 T			

Typical Performance Characteristics


Figure 1: Power De-rating

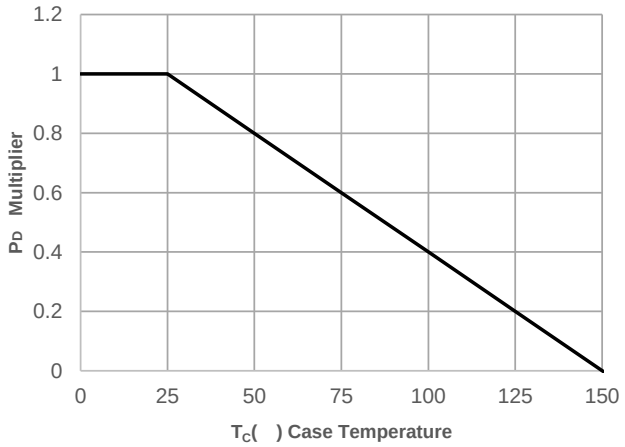

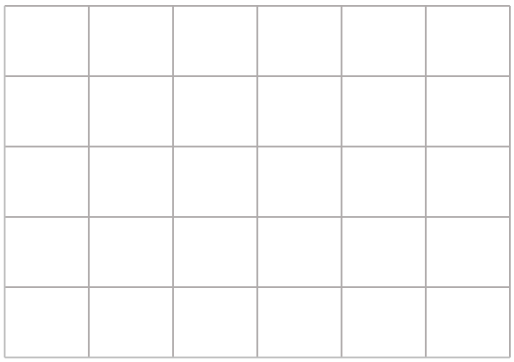


Typical Performance Characteristics

Figure 5: Output Characteristics

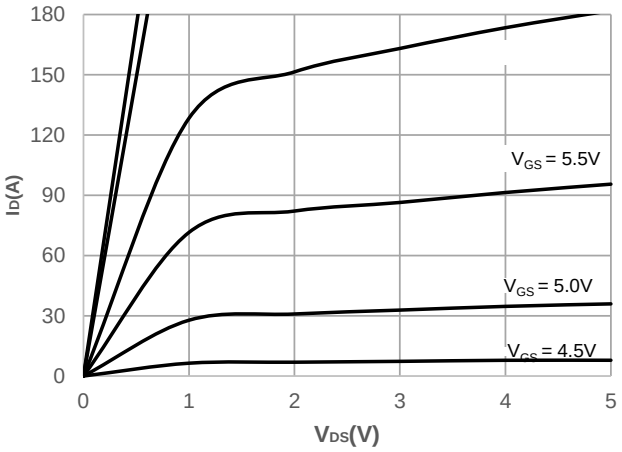

Typical Performance Characteristics

Figure 11: Normalized Breakdown voltage vs.

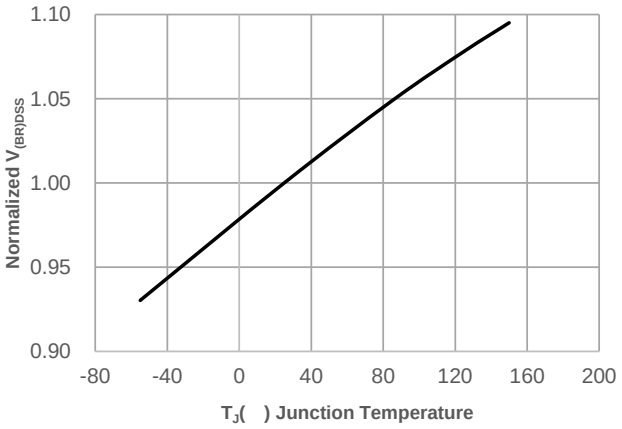

Test Circuit



Figure 1: Gate Charge Test Circuit & Waveform

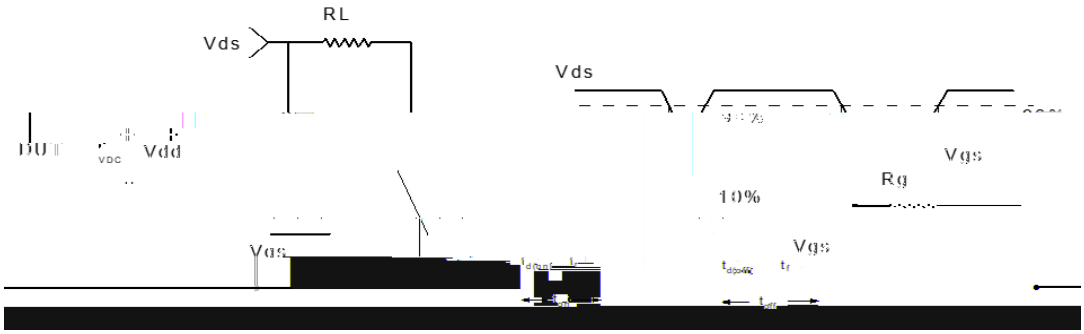


Figure 2: Resistive Switching Test Circuit & Waveform

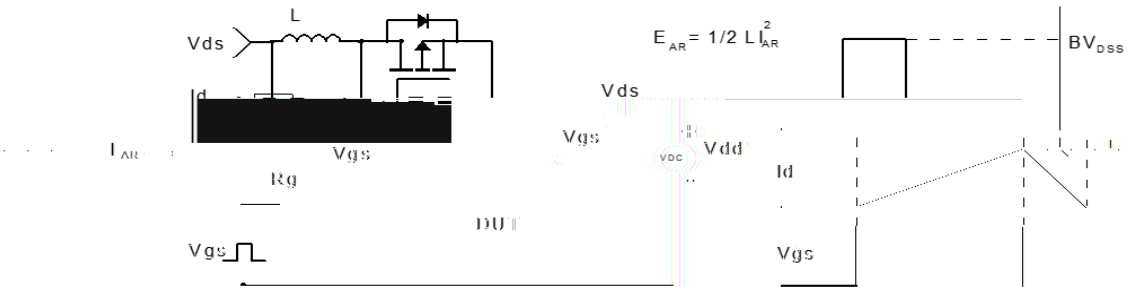


Figure 3: Unclamped Inductive Switching Test Circuit& Waveform

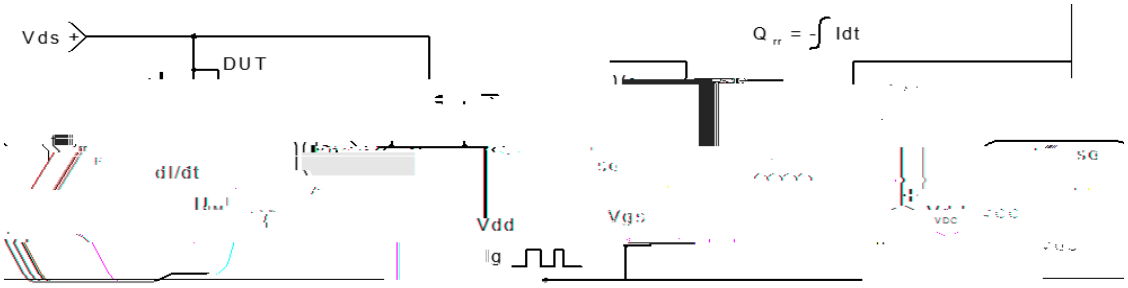


Figure 4: Diode Recovery Test Circuit & Waveform

All product information is copyrighted and subject to legal disclaimers.

Package Mechanical Data(TO-220-3L)

Package Outline



Information furnished in this document is believed to be accurate and reliable. However, Jiangsu JieJie Microelectronics Co.,Ltd assumes no responsibility for the consequences of use without consideration for such information nor use beyond it. Information mentioned in this document is subject to change without notice, apart from that when an agreement is signed, Jiangsu JieJie complies with the agreement.
Products and information provided in this document have no infringement of patents. Jiangsu JieJie assumes no responsibility for any infringement of other rights of third parties which may result from the use of such products and information.

is a registered trademark of Jiangsu JieJie Microelectronics Co.,Ltd.