JOC305XD4 Series

Rev.A.1.1

DESCRIPTION:

MAIN FEATURES

to 100

REACH compliance
Halogen free
HBM: H3A ; MM: M4

ABSOLUTE MAXIMUM RATINGS

Parameter		Symbol	Value	Unit
	≥	Δ		

	≥	Δ		


NOTE1:

NOTE2:

ELECTRICAL CHARACTERISTICS

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit

ORDERING AND MARKING INFORMATION

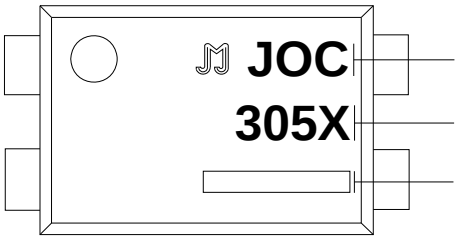MARKING INFORMATION	
	

Packing Quantity			
Option	Quantity	Quantity – Inner box	Quantity –Outer box

JOC305XD4

TEST CIRCUITS

FIG.12:

FIG.13:

Fig.14: Test Circuits of dV/dt



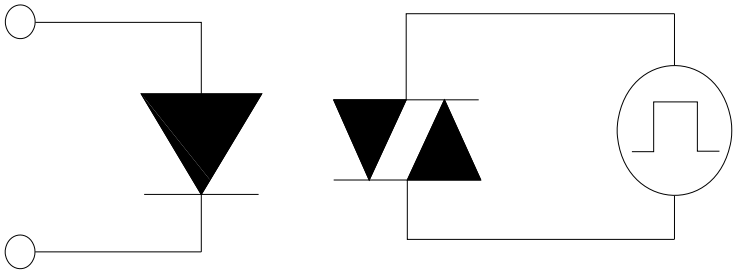


Fig.15: Waveforms of dV/dt




Package Dimension (Unit: mm


Standard DIP Type:

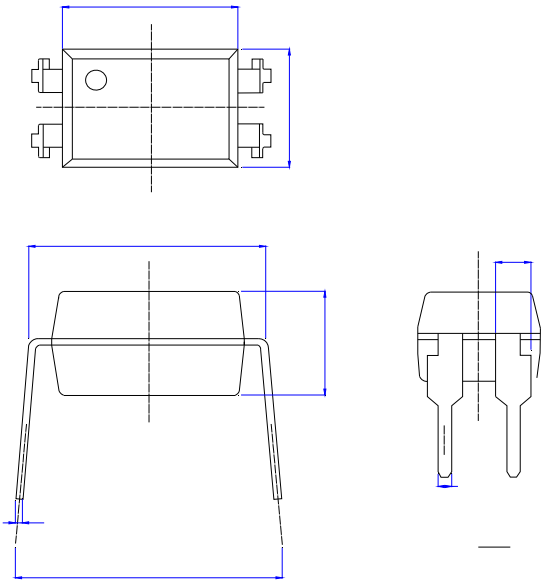


Option S Type:

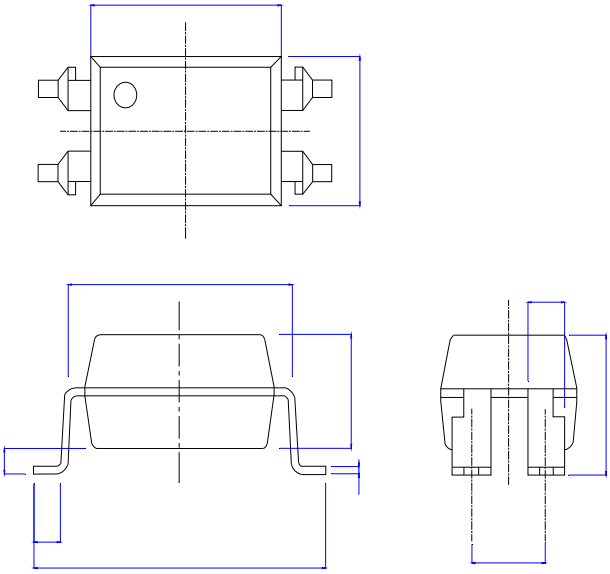

Option SL Type:

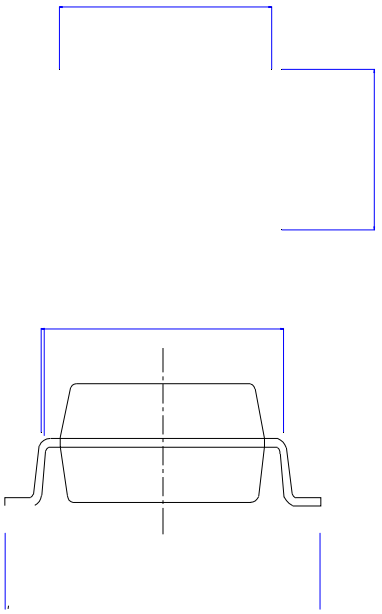


Option SLM Type:

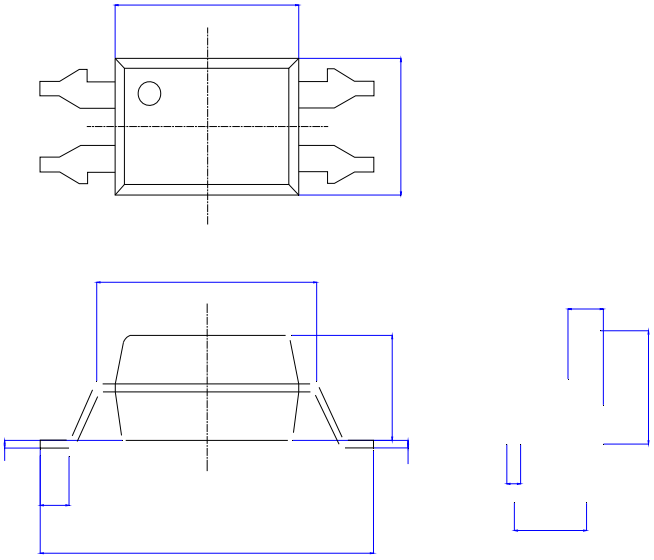


RECOMMENDED SOLDER MASK (Dimensions in mm unless otherwise stated)

Option S/SL

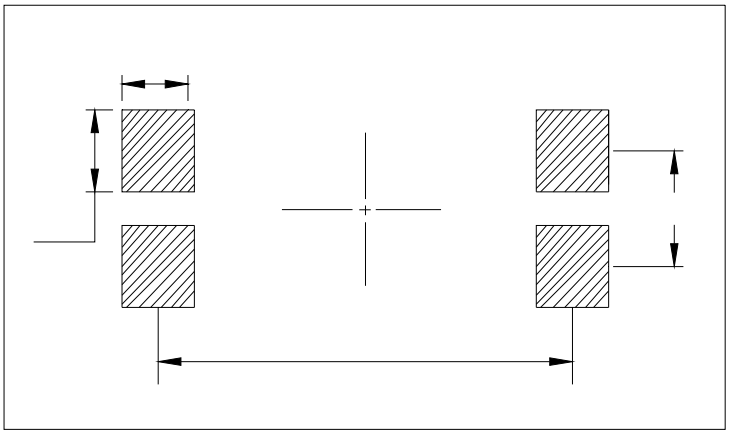


Option SLM

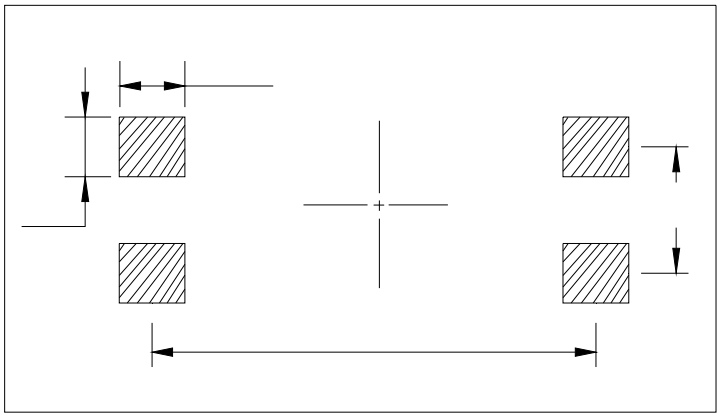


TUBE SPECIFICATIONS (Dimensions in mm unless otherwise stated)

W ñÁ $W d!

Standard DIP

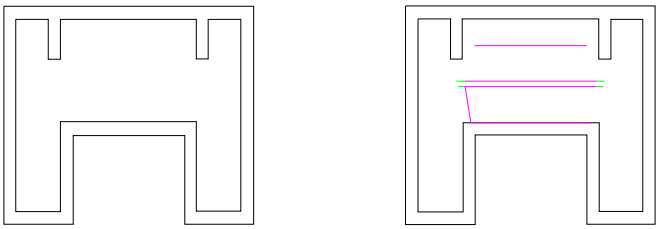

REFLOW INFORMATION

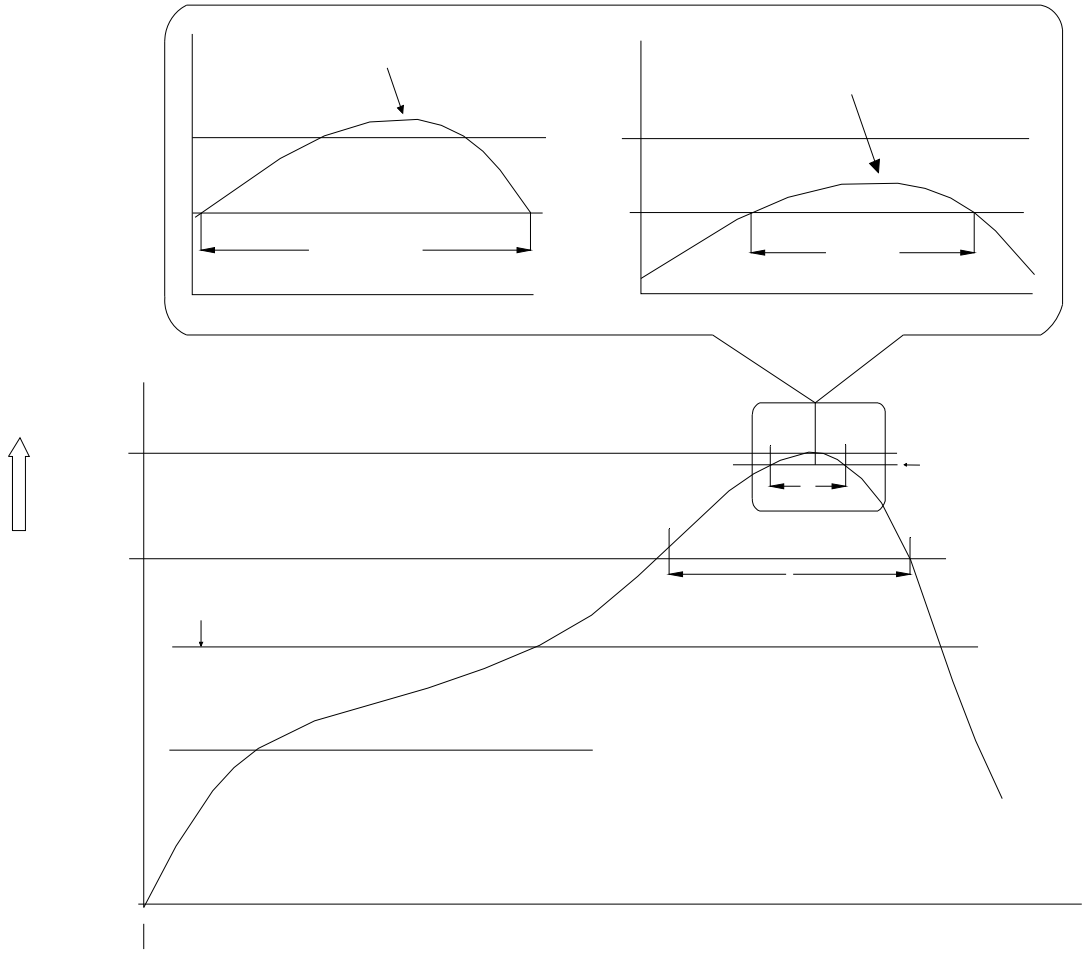

WAVE SOLDERING

HAND SOLDERING BY SOLDERING IRON