

FIG.1: Max. Allowable LED Forward Current vs. Ambient Temperature

FIG.2: Collector Power Dissiption vs. Ambient Temperature

FIG.7: Normalized Current Transfer Ratio vs. Ambient Temperature

FIG.8: Normalized Collector-emitter Saturation Voltage vs. Ambient Temperature

FIG.11: Test Circuits of Response Time


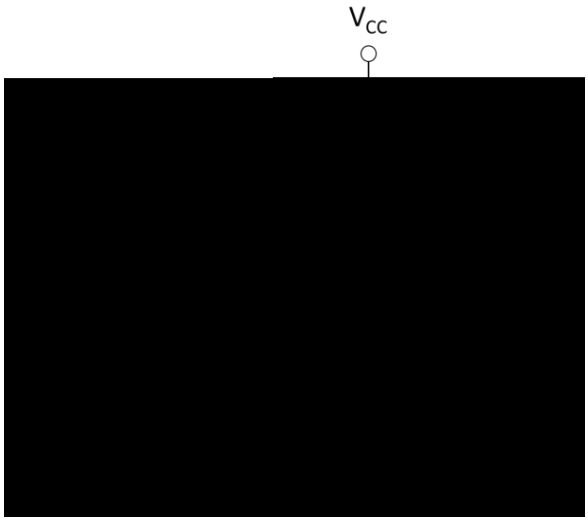



FIG.12: Curves of Response Time




FIG.13: Test Circuits of Frequency Response

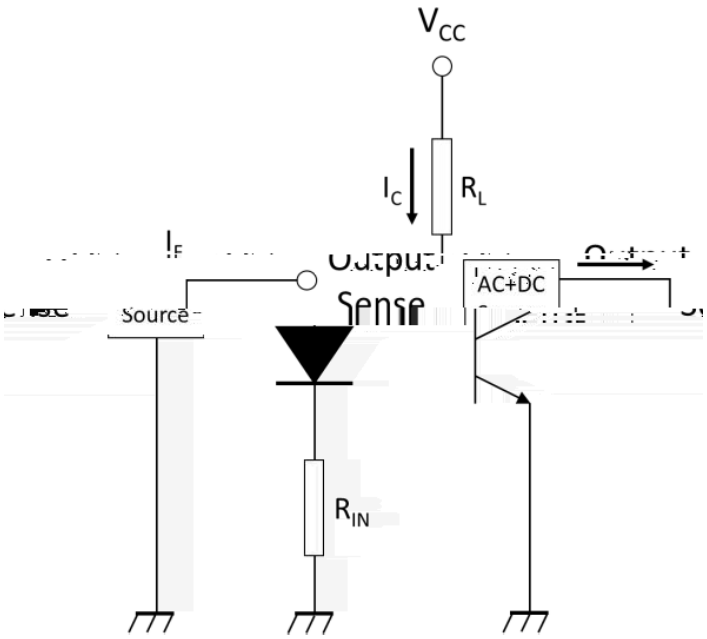

Option T1

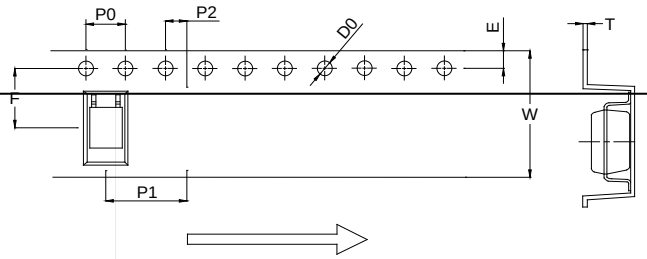

Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
D0						
P0						
P1						
P2						
E						
F						
T						
W						

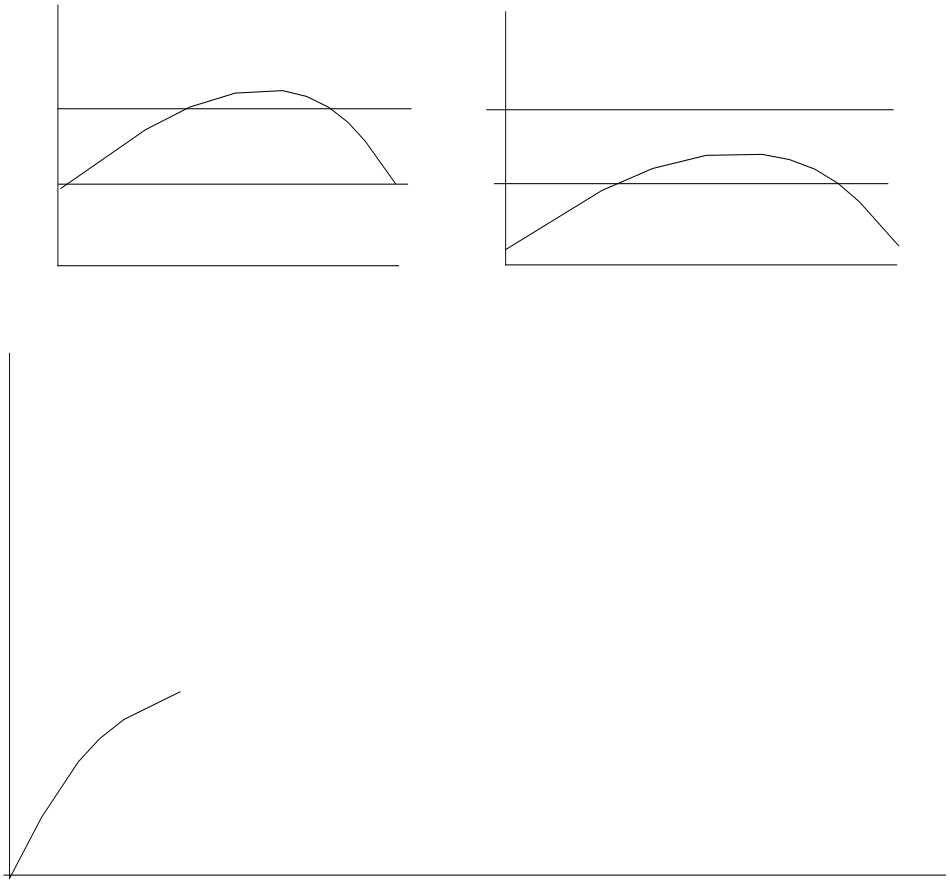

N