JOCT817X-D4P/S Series


DESCRIPTION:

MAIN FEATURES

ABSOLUTE MAXIMUM RATINGS " M ?¸À e m p e r MPu p] Æ DÁF


JOCT817X

ORDERING INFORMATION

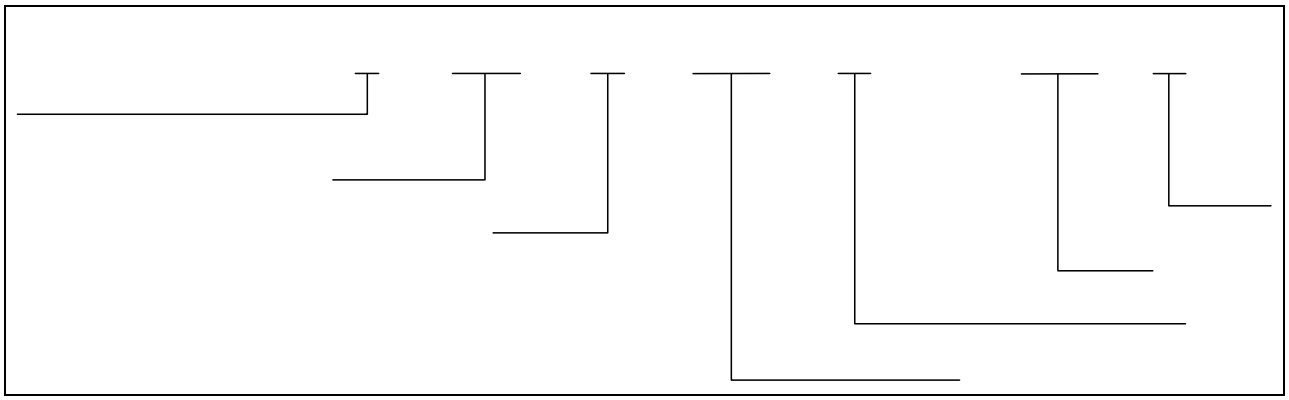

Packing Quantity			
Option	**Quantity**	**Quantity – Inner box**	**Quantity –Outer box**
DIP	100 Units/Tube	32 Tubes/Inner box	10 Inner box/Outer box =32k Units
SMD(T1/T2)	1500 Units/Reel	3 Reels/Inner box	5 Inner box/Outer box =22.5k Units
SMD(T3/T4)	1000 Units/Reel	3 Reels/Inner box	5 Inner box/Outer box =15k Units

MARKING

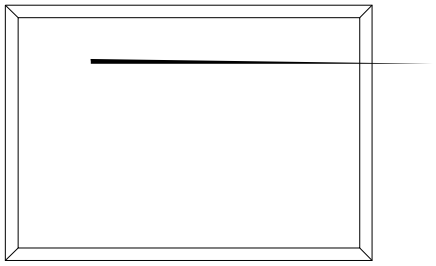

Characteristics Curves

FIG.1:

FIG.2:

FIG.7:

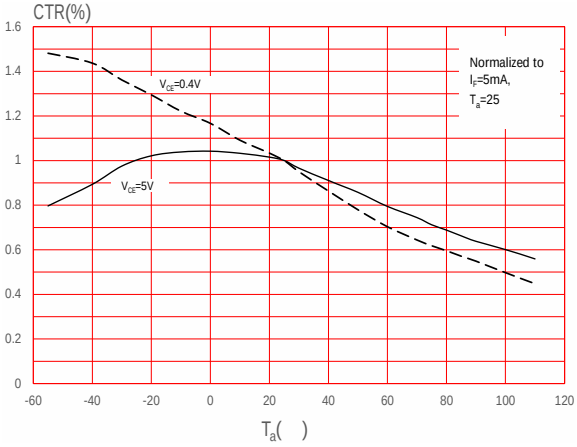


FIG.8:

0 20 40

Test Circuits

FIG.11:

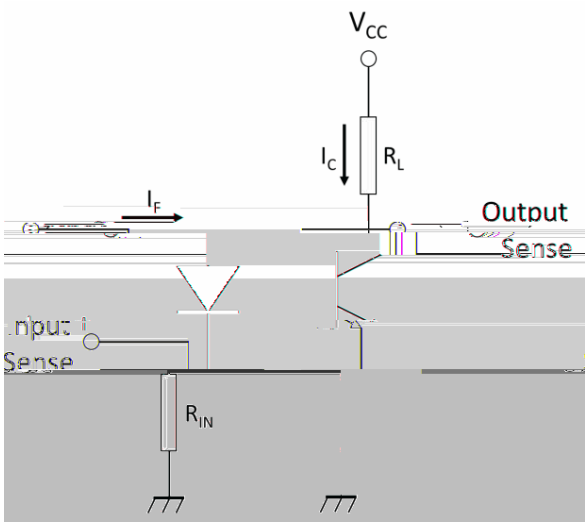


FIG.12:



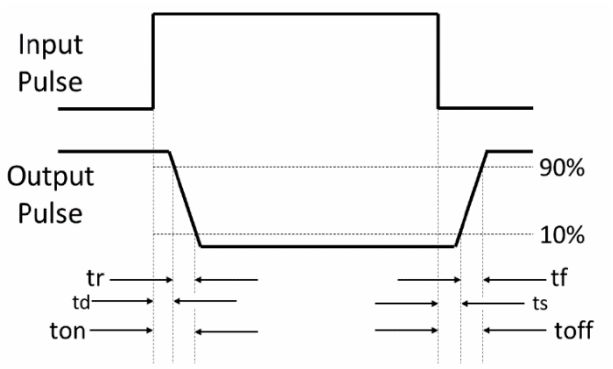



FIG.13:

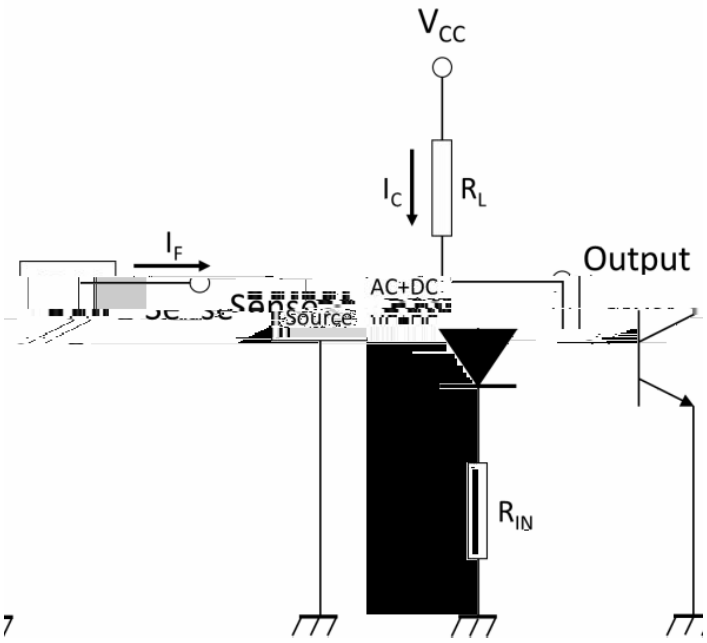

RECOMMENDED SOLDER MASK (Dimensions in mm unless otherwise stated)

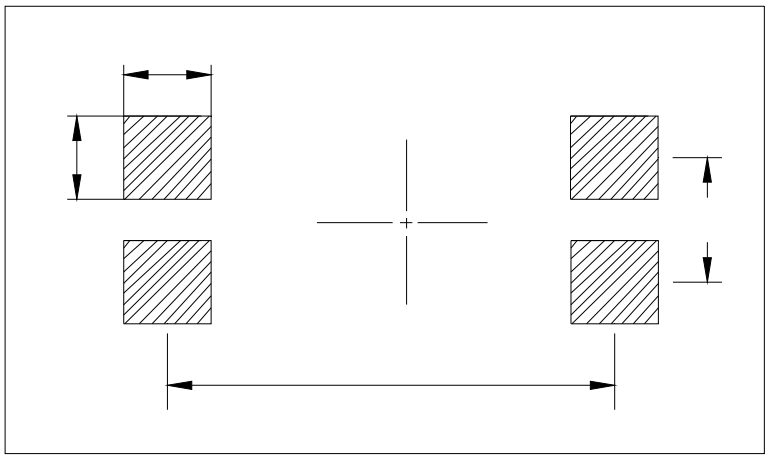

REFLOW INFORMATION

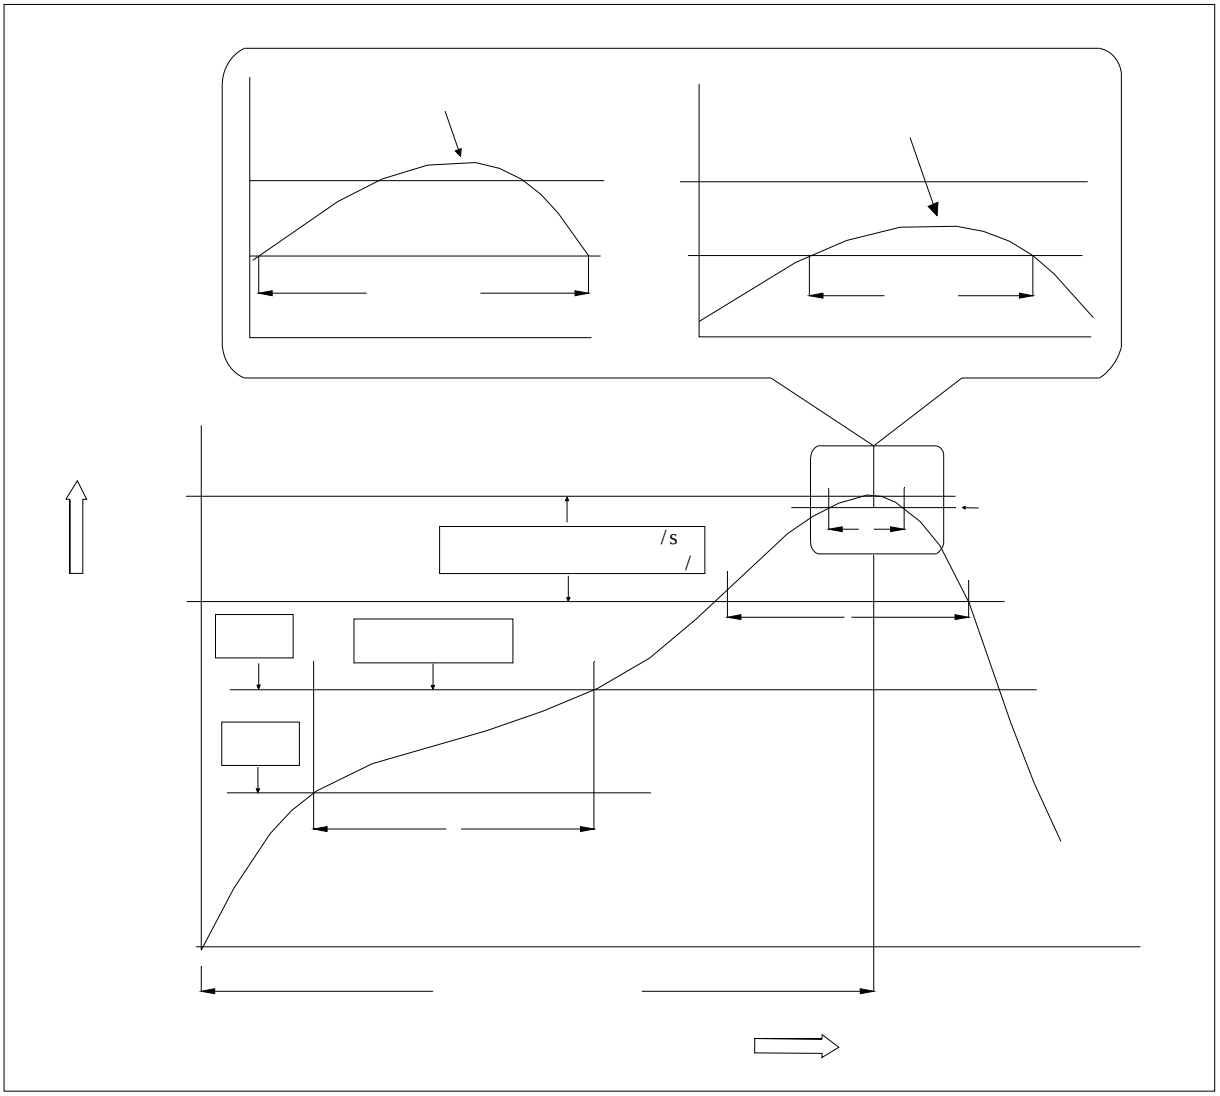

Profile Feature	Sn-Pb Assembly Profile	Pb-Free Assembly Profile