JOCTY17X-D6P/S Series

DESCRIPTION:

The products are 6-pin transistor opto-couplers. The device is a photoelectric coupler composed of light-emitting diode and phototransistor. The products are widely used in switching power supply, intelligent meter, industrial control, measuring instruments, office equipment such as copiers, household appliances: such as air conditioners, fans, water heaters,etc.

MAIN FEATURES

High isolation 5000 VRMS
CTR flexibility available see order information
DC input with transistor output
Operating temperature range -55°C to 110°C
REACH compliance
Halogen free
CQC approved
VDE approved
UL approved

ABSOLUTE MAXIMUM RATINGS (Temperature=25°C)

Parameter		Symbol	Value	Unit
Input	Forward current	I_F	50	mA
	Peak forward current	I_{FP}	1	A
	Reverse voltage	V_R	6	V
	Power dissipation	P_D	75	mW
Output	Collector-emitter Voltage	V_{CEO}	80	V

Soldering Temperature	T_{sol}	260	

NOTE1: μ

NOTE2:

ELECTRICAL CHARACTERISTICS (Temperature=25°C)

Parameter		Symbol	Condition	Min.	Typ.	Max.	Unit
Input	Forward Voltage	V_F	I_F=10mA	-	1.2	1.5	V
	Reverse Current	I_R	V_R=6V	-	-	1	μA
	Input Capacitance	C_{in}	V=0, f=1MHz	-	10	-	pF
Output	Collector-Emitter dark current	I_{CEO}	V_{CE}=20V, I_F=0	-	-	100	nA
	Collector-Emitter breakdown voltage	BV_{CEO}	I_C=0.1mA I_F=0	80	-	-	V
	Emitter-Collector breakdown voltage	BV_{ECO}	I_E=0.1mA I_F=0	7	-	-	V
	Current transfer ratio	CTR	I_F=10mA V_{CE}=5V	40	-	320	%
	Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	I_F=10mA I_C=2.5mA	-	-	0.3	V
	Isolation resistance	R_{IO}	DC500V 40~60%R.H.	10^{12}	10^{14}	-	Ω
	Floating Capacitance	C_{IO}	V=0, f=1MHz	-	0.5	1	pF
	Cut-off Frequency	f_c	V_{CE}=5V, I_C=2mA R_L=100Ω, -3dB	-	80	-	kHz
	Rise Time	t_r	V_{CE}=2V, I_C=2mA R_L=100Ω	-	3	10	μs
	Fall Time	t_f		-	4	10	μs
	Response Time	t_{on}		-	5	15	μs
		t_{off}		-	4	15	μs

NOTE1:

Grade Sign	Min. (%)	Max. (%)

ORDERING INFORMATION

Characteristics Curves

FIG.1: Max. Allowable LED Forward Current vs. Ambient Temperature

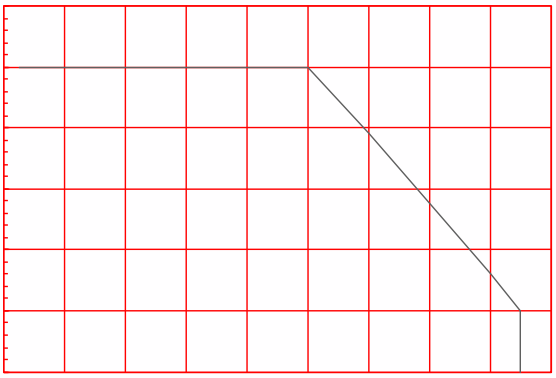


FIG.2: Collector Power Dissiption vs. Ambient Temperature

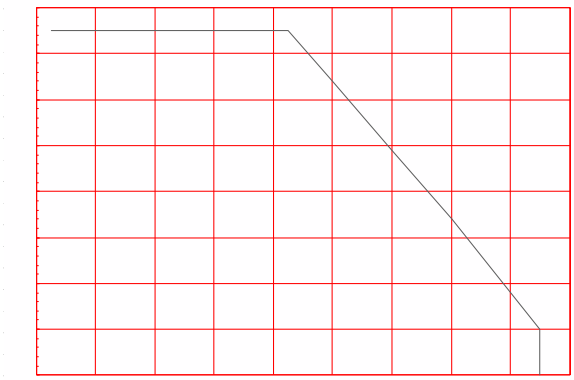


FIG.3: Forward Current vs. Forward Voltage

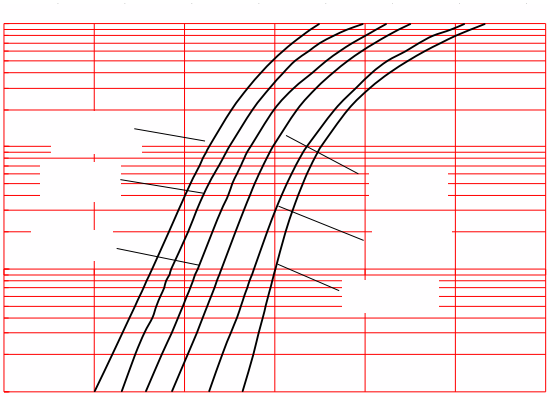


FIG.4: Normalized Collector Dark Current vs. Ambient Temperature

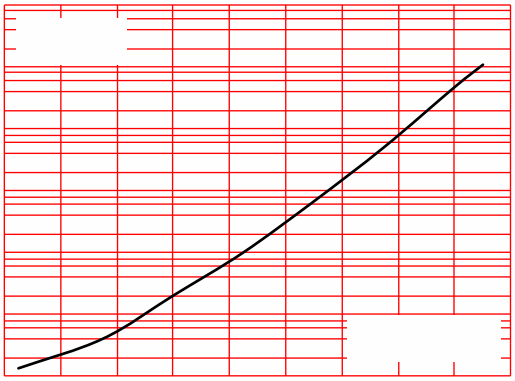


FIG.5: Collector Current vs. Collector-emitter Voltage

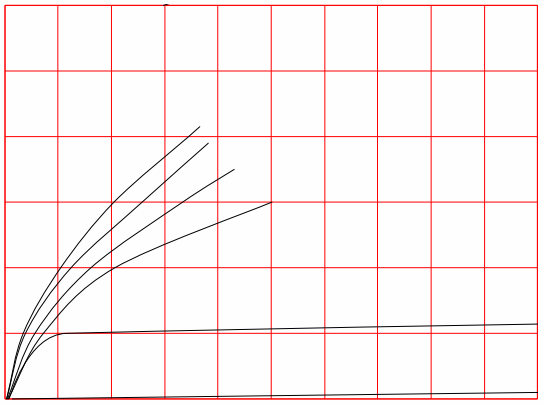


FIG.6: Normalized Current Transfer Ratio vs. Forward Current

Test Circuits


FIG.13: Test Circuits of Response Time

FIG.14: Curves of Response Time

FIG.15: Test Circuits of

Package Dimension (Unit: mm)


Standard DIP Type:

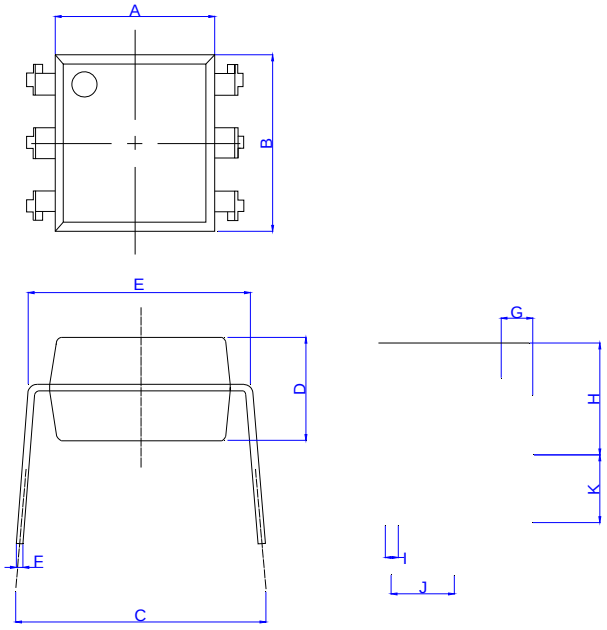

Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	6.20		6.60	0.244		0.260
B	6.92		7.32	0.272		0.288
C	7.15		8.95	0.281		0.352
D	3.20		3.60	0.126		0.142
E	7.32		7.92	0.288		0.312
F						
G	1.15		1.35	0.045		0.053
H	3.90		4.50	0.154		0.177
I						
J						
K						


RECOMMENDED SOLDER MASK (Dimensions in mm unless otherwise stated)

Option SMD

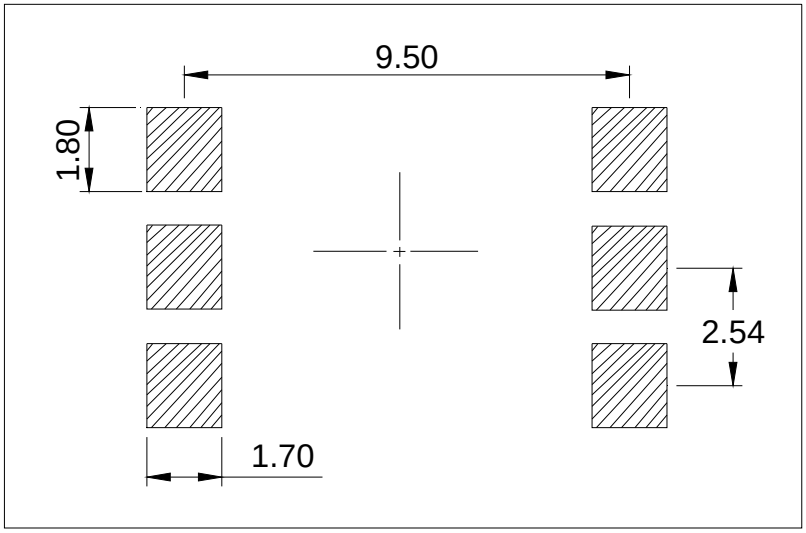


TUBE SPECIFICATIONS (Dimensions in mm unless otherwise stated)

Standard DIP

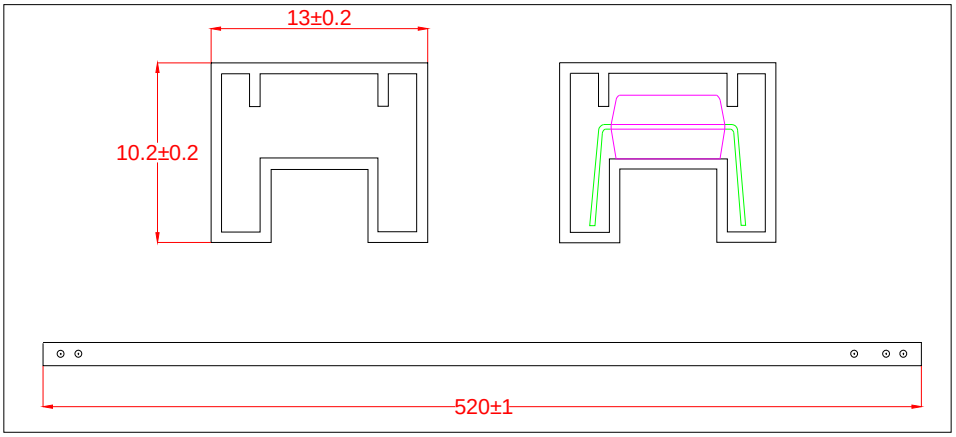


CARRIER TAPE SPECIFICATIONS (Dimensions in mm unless otherwise stated)

Option S

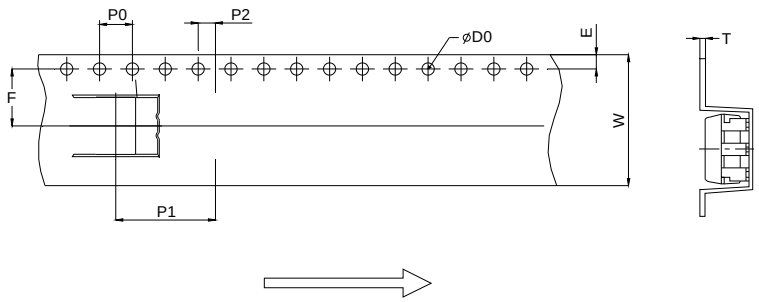


Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
D0		1.50	1.60		0.059	0.063
P0	3.90	4.00	4.10	0.154	0.157	0.161
P1	11.90	12.00	12.10	0.469	0.472	0.476
P2	1.90	2.00	2.10	0.075	0.079	0.083
E	1.65	1.75	1.85	0.065	0.069	0.073
F	7.40	7.50	7.60	0.291	0.295	0.299
T	0.35	0.40	0.45	0.014	0.016	0.018
W	15.70	16.00	16.30	0.618	0.630	0.642

REFLOW INFORMATION

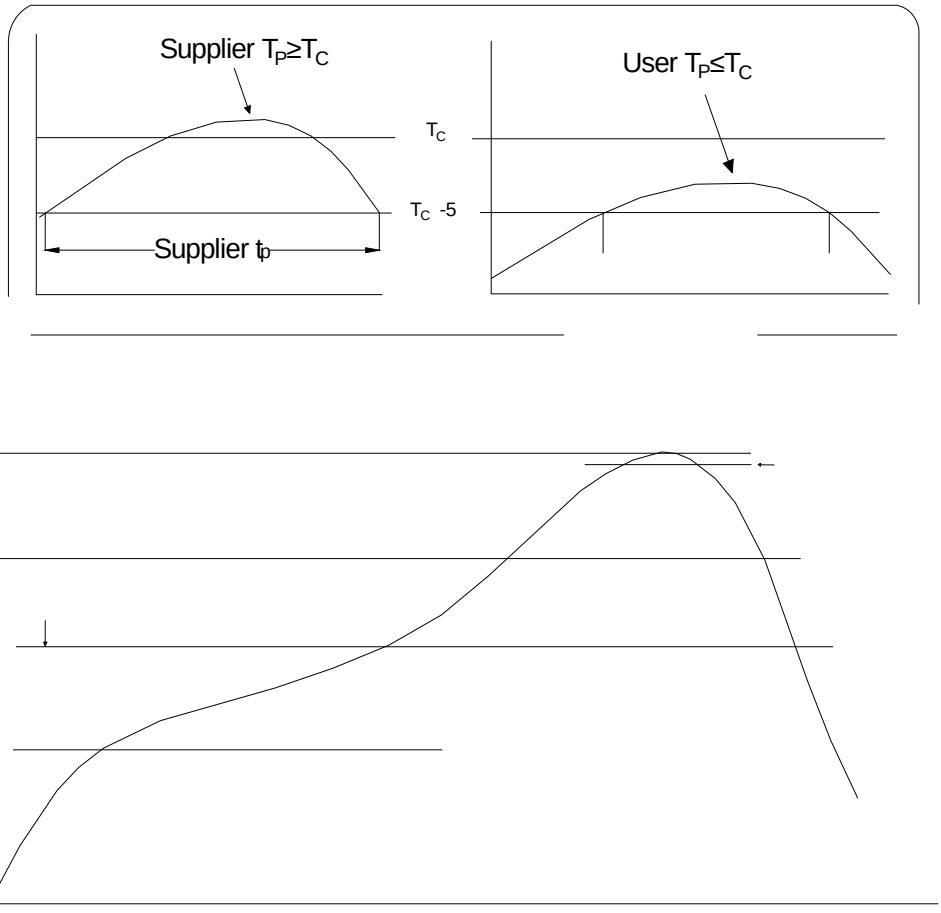

WAVE SOLDERING

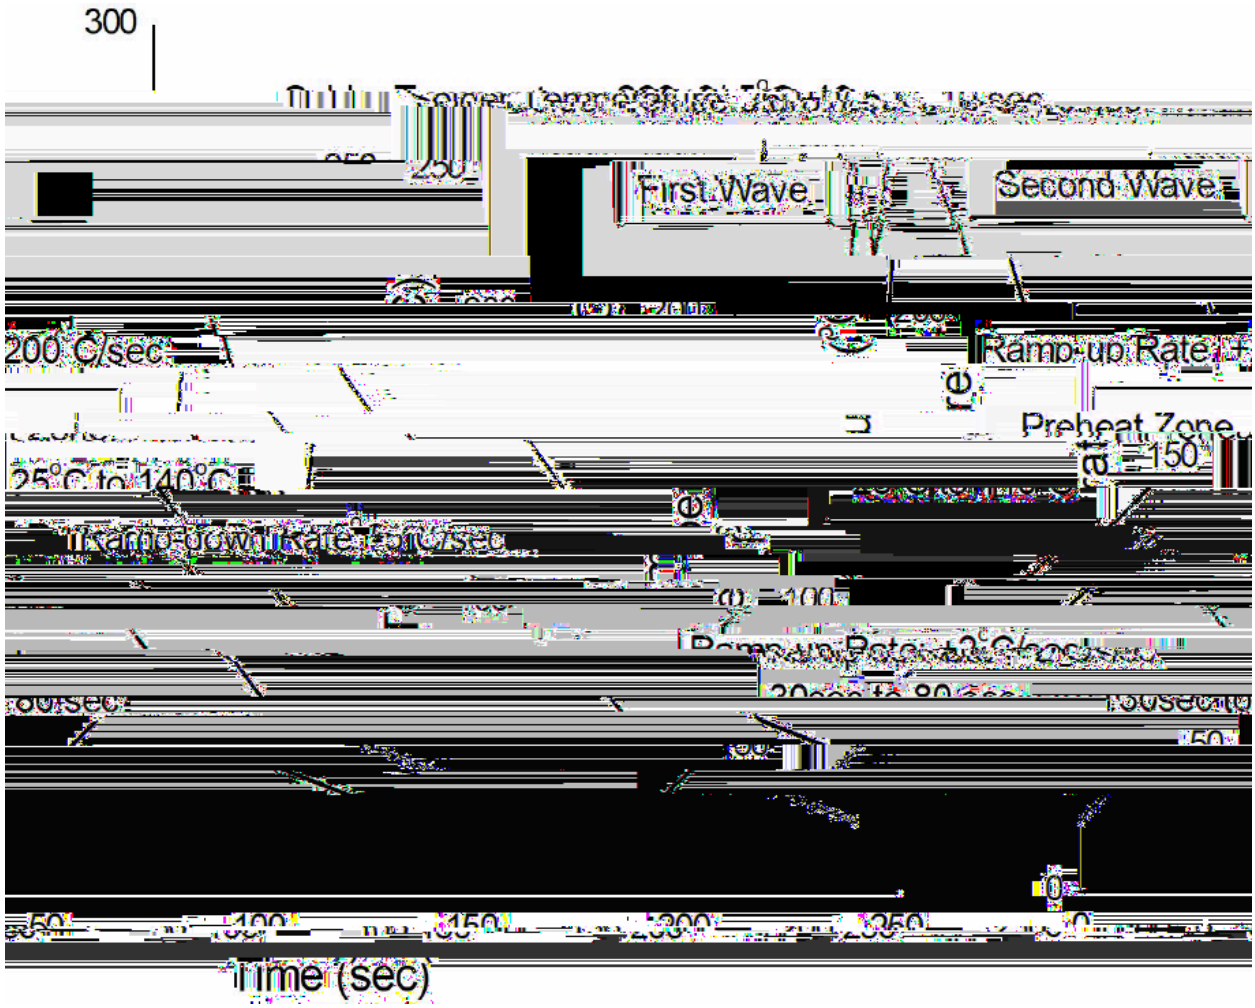

HAND SOLDERING BY SOLDERING IRON	
Soldering Temperature	360 ± 5
Soldering Time	3s max.

Note:

1. Reflow soldering is recommended at the temperatures and times shown, no more than three times.

2. Avoid direct contact between the epoxy body and any tools or surfaces exceeding its maximum storage temperature.

3. Application of pressure on the epoxy body is prohibited at elevated temperatures. In specific scenarios, any applied force must not exceed 2.5N.

4. Ensure the component has cooled to ambient temperature before proceeding with any subsequent manufacturing steps.

5. The component has a shelf life of one year when stored under standard conditions.

6. Recommend storage Temp.: 0~40°C;

Recommend storage humidity: <60%;

MSL level: MSL 1

Information furnished in this document is believed to be accurate and reliable. However, Jiangsu JieJie Microelectronics Co., Ltd. assumes no responsibility for the consequences of use without consideration for such information nor use beyond it. Information mentioned in this document is subject to change without notice, apart from that when an agreement is signed, Jiangsu JieJie complies with the agreement.

Products and information provided in this document have no infringement of patents. Jiangsu JieJie assumes no responsibility for any infringement of other rights of third parties which may result from the use of such products and information. This document supersedes and replaces all information previously supplied.

is a registered trademark of Jiangsu JieJie Microelectronics Co., Ltd.

Copyright © 2026 Jiangsu JieJie Microelectronics Co., Ltd. All rights reserved.