
TO-247

G C E



A d c f a c edad bec e a d ca e .

Symbol	Parameter	Values	Unit
V_{CES}	Collector-emitter voltage	650	V
V_{GES}	Gate-emitter voltage	±20	V
I_C	Continuous collector current ($_C$=25)	150	A
	Continuous collector current ($_C$=100)	75	A
I_{CM}	Pulsed collector current,		

Electrical characteristics of IGBT (vj=25 unless otherwise specified)

Static characteristics

Symbol	Parameter	Test condition	Values			Unit
			Min.	Typ.	Max.	
CES	Collector-emitter breakdown voltage	GE=0V, I C=250μA	650	-	-	V
CES	Collector-emitter leakage current	CE=650V, GE=0V	-	-	50	μA
GES	Gate leakage current, forward	GE=20V, CE=0V	-	-	100	nA
	Gate leakage current, reverse	GE=-20V, CE=0V	-	-	-100	nA
GE(th)	Gate-emitter threshold voltage	GE= CE, C=1mA	5.0	5.4	5.6	V
CE(sat)	Collector-emitter saturation voltage	GE=15 V, C=75A	-	1.8	-	V
		GE=15V, C=75A, vj =175	-	2.3	-	V

Dynamic characteristics

Symbol	Parameter	Test condition	Values			Unit
			Min.	Typ.	Max.	
ies	Input capacitance	CE=30V GE=0V =1MHz	-	4250	-	pF
oes	Output capacitance		-	205	-	pF
res	Reverse transfer capacitance		-	31	-	pF
g	Total gate charge	CC=520V =15V C=75A	-	130	-	nC

Symbol	Parameter	Test condition	Values	Un

Typical performance characteristics

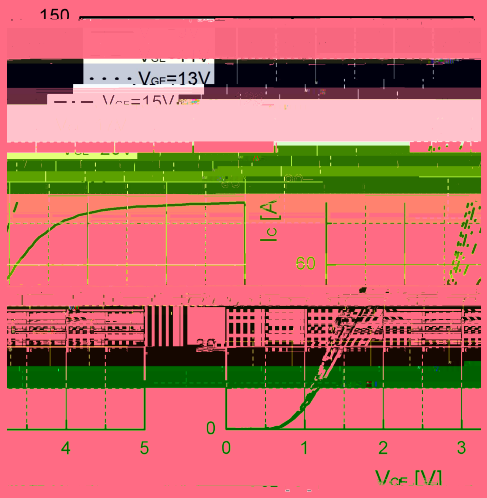


Fig 1. Typical output characteristic (vj=25)



Fig 2. Typical output characteristic(vj=175)


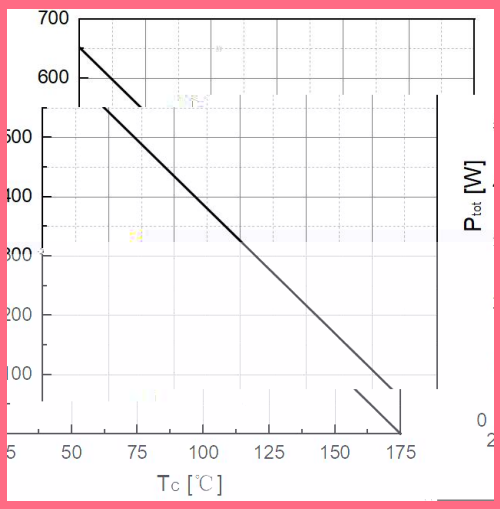


Fig 3. Power dissipation as a function of 7

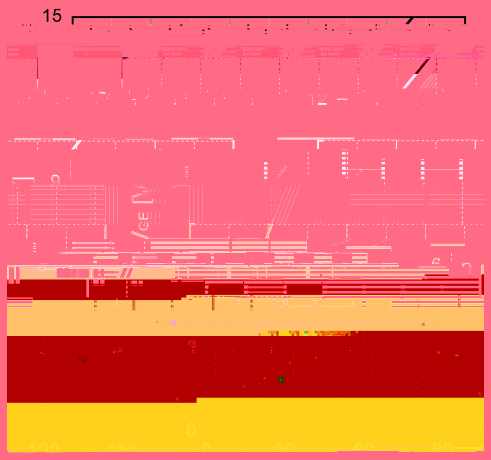

Typical performance characteristics

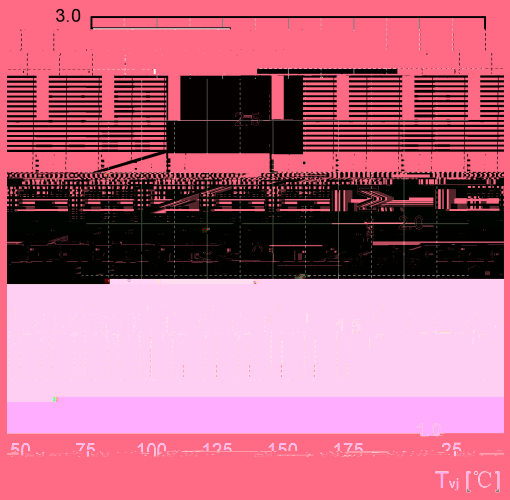


Fig 7. Typical $_{CEsat}$ as a function of $_{vj}$

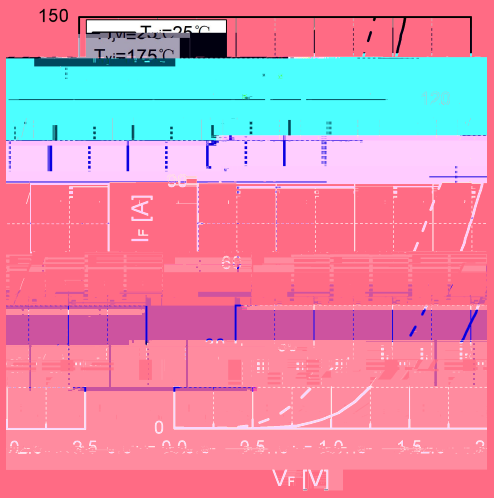


Fig 8. Typical $_{F}$ as a function of $_{F}$

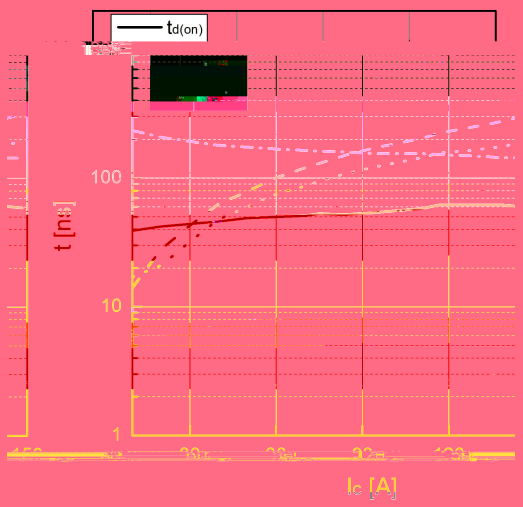


Fig 9. Typical switching time as a function of $_{C}$

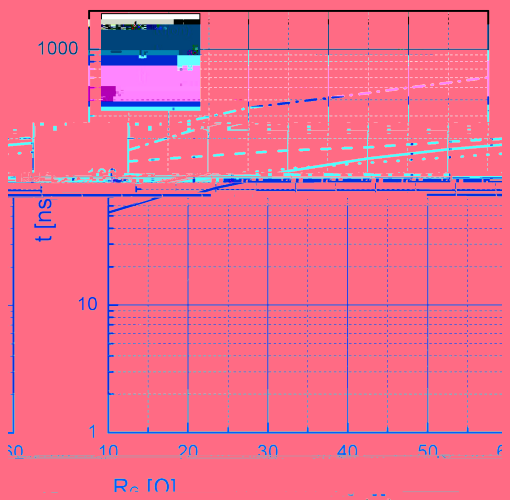


Fig 10. Typical switching times as a function of $_{G}$

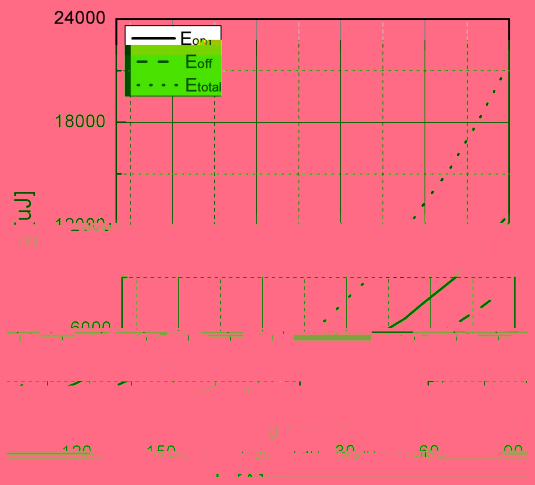


Fig 11. Typical switching energy losses as a function of $_{C}$

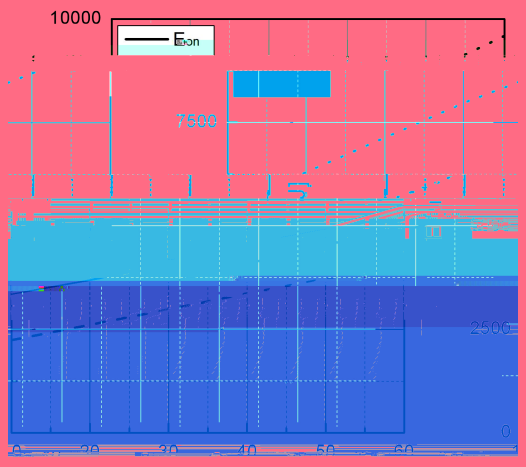



Fig 12. Typical switching energy losses as a function of $_{G}$



A d

Package dimension

TO-247

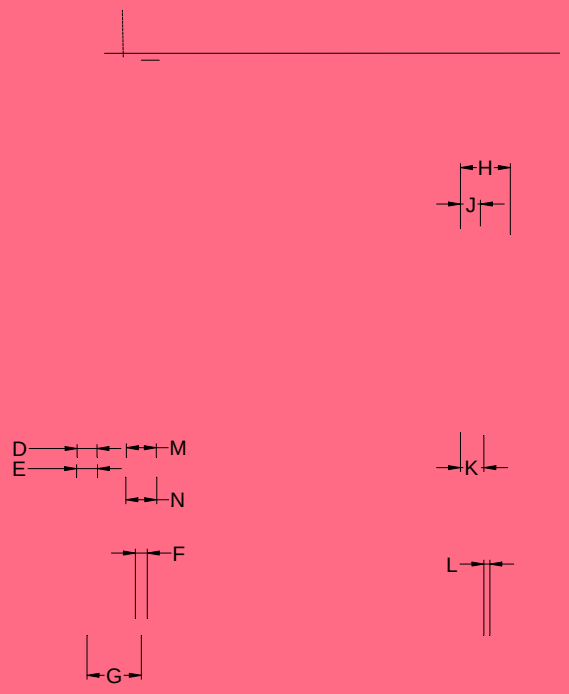

Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.'	Max.	Min.	Typ.	Max.
A	15.50	15.80	16.10	0.610	0.622	0.634
B	20.80	21.00	21.20	0.819	0.827	0.835
C	19.70	20.00	20.30	0.776	0.787	0.799
D	1.80	2.00	2.20	0.071	0.079	0.087
E	1.90	2.10	2.30	0.075	0.083	0.091
F	1.00	1.20	1.40	0.039	0.047	0.055
G	5.25	-	5.65	0.207	-	0.222
H	4.80	5.00	5.20	0.189	0.197	0.205
J	1.90	2.00	2.10	0.075	0.079	0.083
K	2.20	2.35	2.50	0.087	0.093	0.098
L	0.41	0.60	0.79	0.016	0.024	0.031
M	2.80	3.00	3.20	0.110	0.118	0.126
N	2.90	3.10	3.30	0.114	0.122	0.130

A dc f a c edad bec eadca e .

Date	Revision	Changes
2024-03-06	Rev 1.1	Update
2024-03-20	Rev 1.2	Update
2024-05-17	Rev 2.0	Update
2026-06-25	Rev 2.1	Update thermal

Disclaimer

PLEASE NOTE - Jiangsu JieJie Microelectronics Co., Ltd ("JJM") reserves the right to amend, correct, modify and enhance the product and/or this document at any time without prior notice. If you intend to