
ACJT04C-1000CW 4A TRIAC

Rev.A.1.1

DESCRIPTION:

The ACJT04C-1000CW triac is suitable for general purpose AC switching. It can be used as an ON/OFF function in applications such as heating regulation, induction motor starting circuits, for phase control operation in light dimmers, motor speed controllers. The ACJT04C-1000CW embeds a TVS structure to absorb the inductive turn-off energy such as those described in the IEC 61000-4-5 standards. Package TO-220C is RoHS compliant.

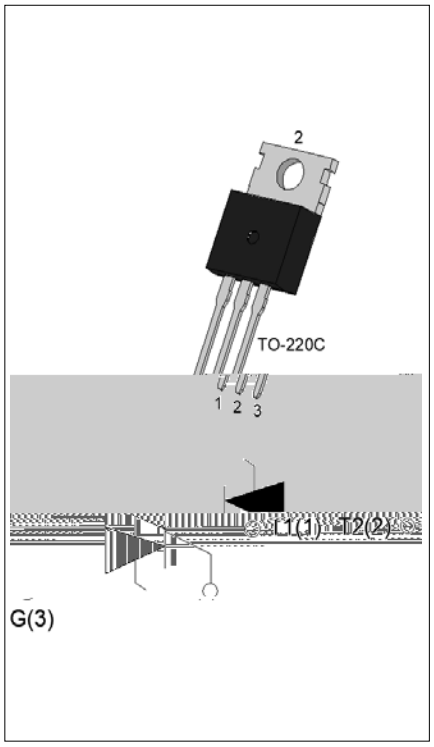

MAIN FEATURES

Symbol	Value	Unit
$I_{T(RMS)}$	4	A
V_{DRM} /V_{RRM}	1000	V
I_{GT} / /	35/35/35	mA

ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Value	Unit
Storage junction temperature range	T_{stg}	-40-150	
Operating junction temperature range	T_j	-40-125	
Repetitive peak off-state voltage (T_j=25)	V_{DRM}	1000	V
Repetitive peak reverse voltage (T_j=25)	V_{RRM}	1000	V
RMS on-state current ($T_C \leq$ 113)	$I_{T(RMS)}$	4	A
Non repetitive surge peak on-state current (full cycle , t_p=20ms , T_j=25)	I_{TSM}	40	A
Non repetitive surge peak on-state current (full cycle , t_p=16.6ms , T_j=25)		44	
I^2t value for fusing (t_p=10ms , T_j=25)	I^2t	8	A^2s
Critical rate of rise of on-state current (I_G=2 I_{GT} , f=100Hz , T_j=125)	dI/dt	100	A/μs
Peak gate current (t_p=20μs , T_j=125)	I_{GM}	4	A
Average gate power dissipation (T_j=125)	$P_{G(AV)}$	0.5	W
Peak gate power	P_{GM}	10	W

Peak pulse voltage (T_j=25 ; non-repetitive,off-state;FIG.7)	V_{pp}	3.75	kV

ELECTRICAL CHARACTERISTICS (T_j=25

ORDERING INFORMATION

FIG.1: Maximum power dissipation versus RMS on-state current


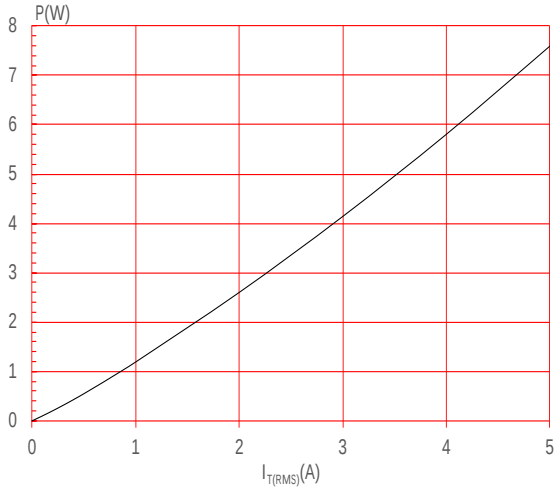


FIG.2: RMS on-state current versus case temperature



PACKAGE MECHANICAL DATA

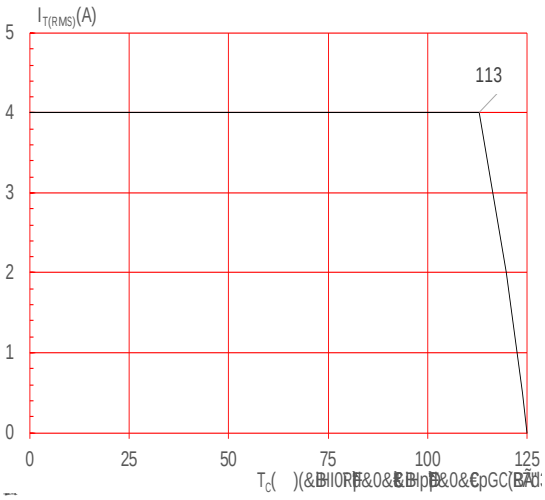

Information furnished in this document is believed to be accurate and reliable. However, Jiangsu JieJie Microelectronics Co., Ltd. assumes no responsibility for the consequences of use of such information