
ACJT105-10W 1A TRIAC

Rev.A.1.1

DESCRIPTION:



MAIN FEATURES

ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Value	Unit

ORDERING INFORMATION

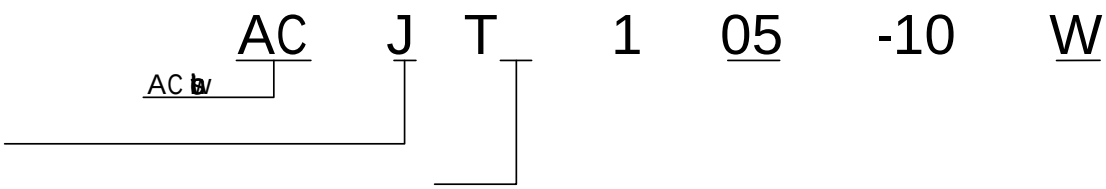


FIG.1:

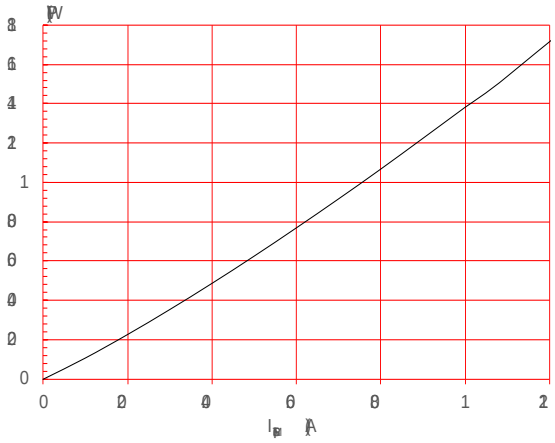


FIG.2:

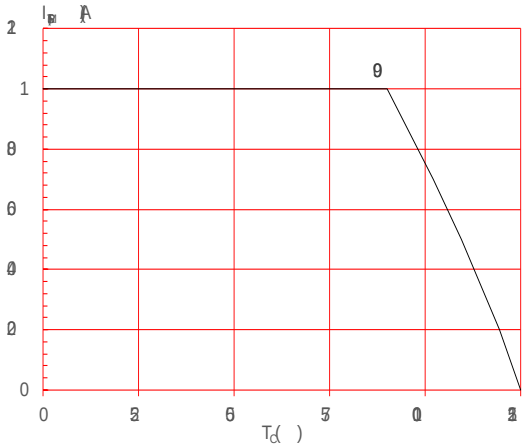


FIG.3:

thickness:35μm)(full cycle)


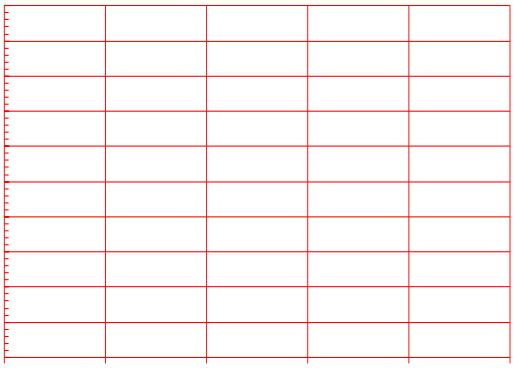


FIG.4:

FIG.7:

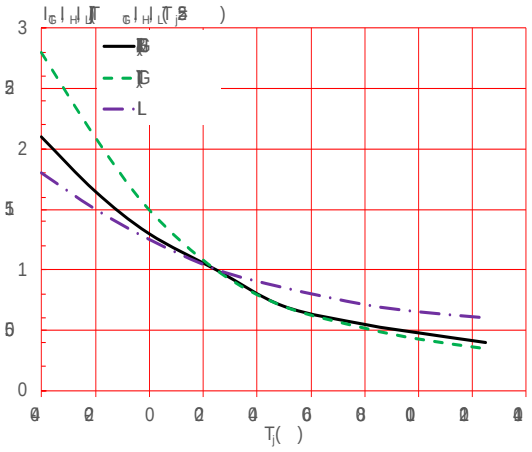

-61000-4-5

EC61000-4-5

1.2/50μS voltage surge
8/20μS current surge

2Ω

R

50Ω

L

66μH

AC

300Ω

ORDERING INFORMATION

Order code	Voltage V_{DRM}/V_{RRM}

PACKAGE MECHANICAL DATA

