
ACJT1210-10 4 0 Td [( )8.3 04 0 Td [( )8.3 ( )8.3 ( )]TJ 0.2235303 Tw4 0 0 14..9

AC switching. It can be used as an ON/OFF function in applications such as heating regulation, induction motor



Peak pulse voltage (T_j=25 ; non-repetitive,off-state;FIG.7)	V_{pp}	4.5	kV

ELECTRICAL CHARACTERISTICS (T_j=25 unless otherwise specified)

Symbol **Test Condition** **Quadrant** 4N ET Q 0 Tw 4.451.83d <010-3.(n2]TJ EMC /P

FIG.1: Maximum power dissipation versus RMS on-state current


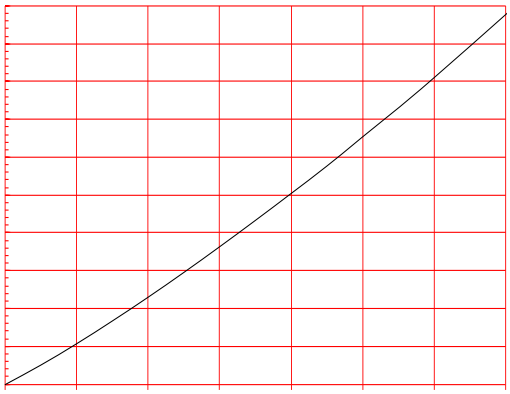


FIG.2: RMS on-state current versus case temperature

FIG.7 Test circuit for inductive and resistive loads to IEC-61000-4-5 standards



ORDERING INFORMATION

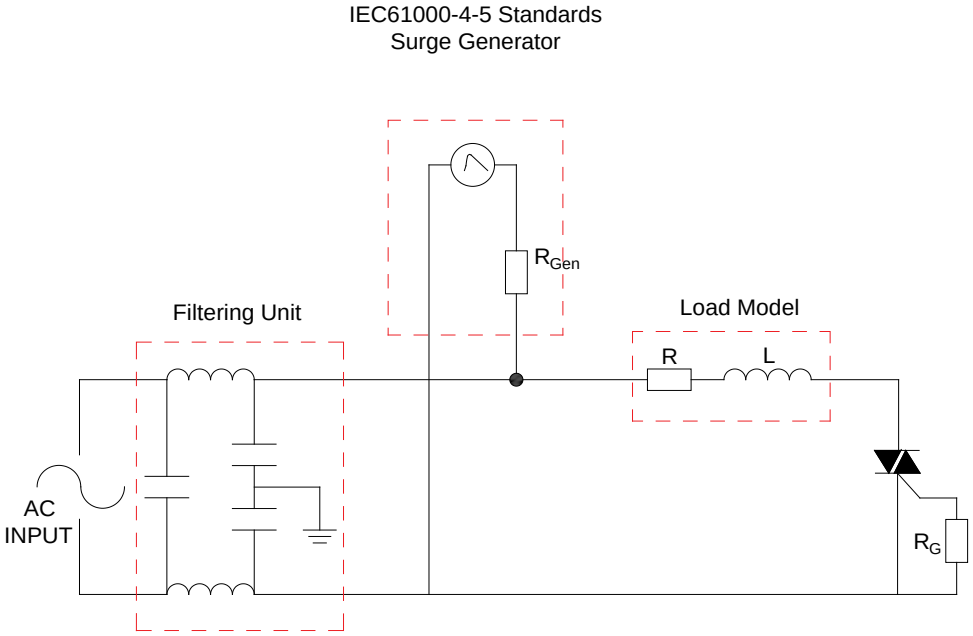