
ACJT405-8C 4A TRIAC

Rev.A.1.1

The ACJT405-8C triac is suitable for general purpose AC switching. It can be used as an ON/OFF function in applications such as heating regulation, induction motor starting circuits, for phase control operation in light dimmers, motor speed controllers. The ACJT405-8C embeds a TVS structure to absorb the inductive turn-off energy such as those described in the IEC 61000-4-5 standards. Package TO-220C is RoHS compliant. C



Peak gate power	P_{GM}	10	W
Peak pulse voltage (T_j=25 ; non-repetitive,off-state;FIG.7)	V_{pp}	3	kV

(T_j=25 unless otherwise specified)

Symbol	Test Condition	Quadrant	Value		Unit
I_{GT}	V_D =12V R_L =33Ω	- -	MAX.	5	mA
V_{GT}		- -	MAX.	1	V
V_{GD}	V_D =V_{DRM} T_j =125 R_L =3.3kΩ	- -	MIN.	0.2	V
I_L	I_G =1.2I_{GT}	-	MAX.	15	mA
				20	
I_H	I_T =100mA		MAX.	10	mA
dV/dt	V_D=540V Gate Open T_j =125		MIN.	200	V/μs
(dI/dt)c	(dV/dt)c=1				

AC J T 4 -0m [cm /Im0 Do

FIG.1: Maximum power dissipation versus RMS on-state current


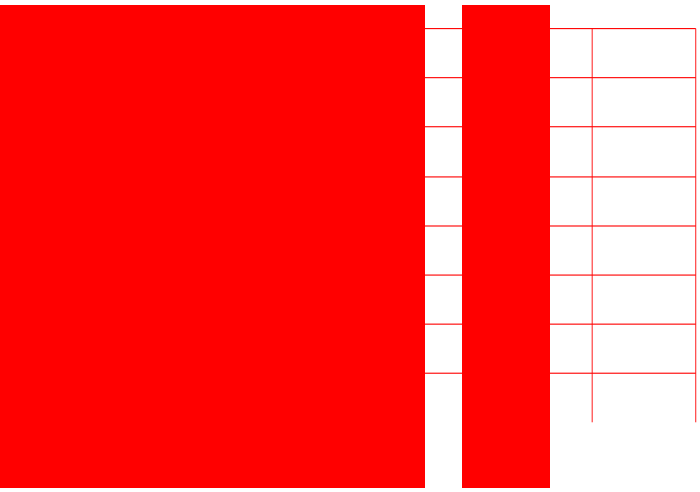


FIG.2: RMS on-state current versus case temperature

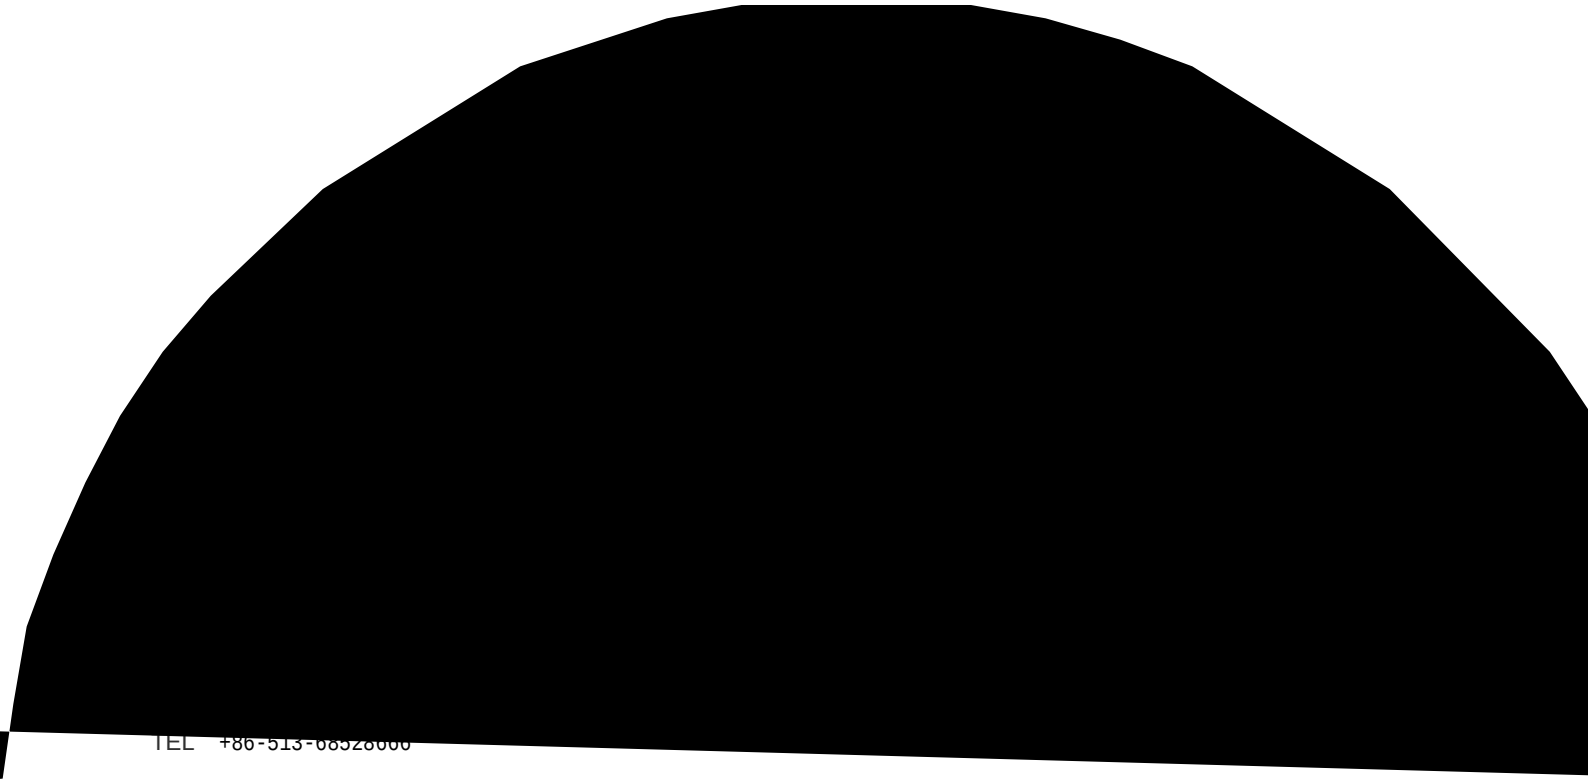

TEL +86-513-68528666