
CR03AM-16 1.25A Sensitive SCR

Rev.A.2.2

^ Z / W d / K E W

The CR03AM-16 SCR provides high dV/dt rate with strong resistance to electromagnetic interface. It is especially recommended for use on residual current circuit breaker, straight hair, igniter etc. Package TO-92CR is RoHS compliant.

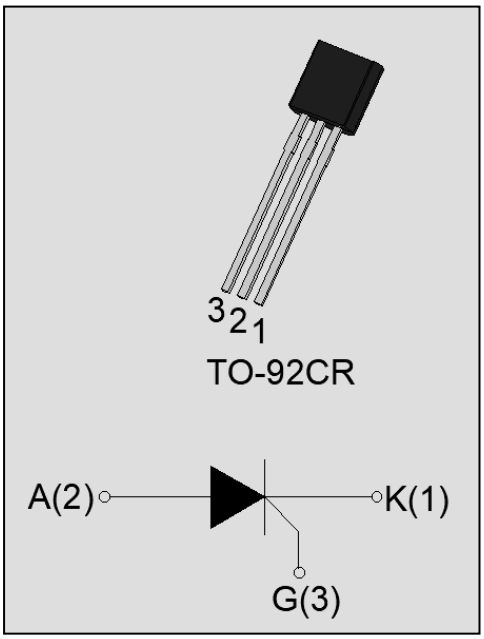

D / E & d h Z ^

Symbol	Value	Unit
$I_{T(RMS)}$	1.25	A
V_{DRM} /V_{RRM}	1250	V
I_{GT}	≤200	μA

^ K h d D y / D h D Z d / E ' ^

Parameter	Symbol	Value	Unit
Storage junction temperature range	T_{stg}	-40-150	
Operating junction temperature range	T_j	-40-110	
Repetitive peak off-state voltage (T_j=25)	V_{DRM}	1250	V
Repetitive peak reverse voltage (T_j=25)	V_{RRM}	1250	V
Average on-state current (T_C 042)	$I_{T(AV)}$	0.8	A
RMS on-state current (T_C 042)	$I_{T(RMS)}$	1.25	A
Non repetitive surge peak on-state current (t_p=10ms , T_j=25)	I_{TSM}	25	A
Non repetitive surge peak on-state current (t_p=8.3ms , T_j=25)		28	
I^2t value for fusing (t_p=10ms , T_j=25)	I^2t	3.1	A^2s
Critical rate of rise of on-state current (I_G=2 hI_{GT} , f=100Hz , T_j=110)	dI/dt	100	A/μs
Peak gate current (t_p=20μs, T_j=110)	I_{GM}	1.2	A
Average gate power dissipation (T_j=110)	$P_{G(AV)}$	0.2	W

Peak gate power	P_{GM}	2	W
Peak pulse voltage (T_j=25 ; non-repetitive,off-state;FIG.7)	V_{pp}	1	kV


> d Z / > , Z d Z(T_j=25 /unless otherwise specified)

Symbol	Test Condition	Value			Unit
		MIN.	TYP.	MAX.	
I_{GT}	V_D=12V R_L=33Ω	-	50	200	μA
V_{GT}		-	0.6	0.8	V
V_{GD}	V_D=V_{DRM} T_j=110	0.2	-	-	V
I_L	I_G=1.2 I_{GT}	-	-	5	mA
I_H	I_T=0.05A	-	-	4	mA
dV/dt	V_D=800V T_j=110 R_{GK}=1kΩ	200	-	-	V/μs
	V_D=800V T_j=110 R_{GK}=220Ω	1000	-	-	
t_{on}	I_G=10mA I_A=20mA I_R=2mA T_j=25	-	2	-	μs
t_{off}		-	50	-	μs

^ d d / , Z d Z / ^ d / ^

Symbol	Parameter	Value(MAX.)	Unit
V_{TM}	I_T=2A t_p=380μs T_j=25	1 .3	V

D Z < / E '

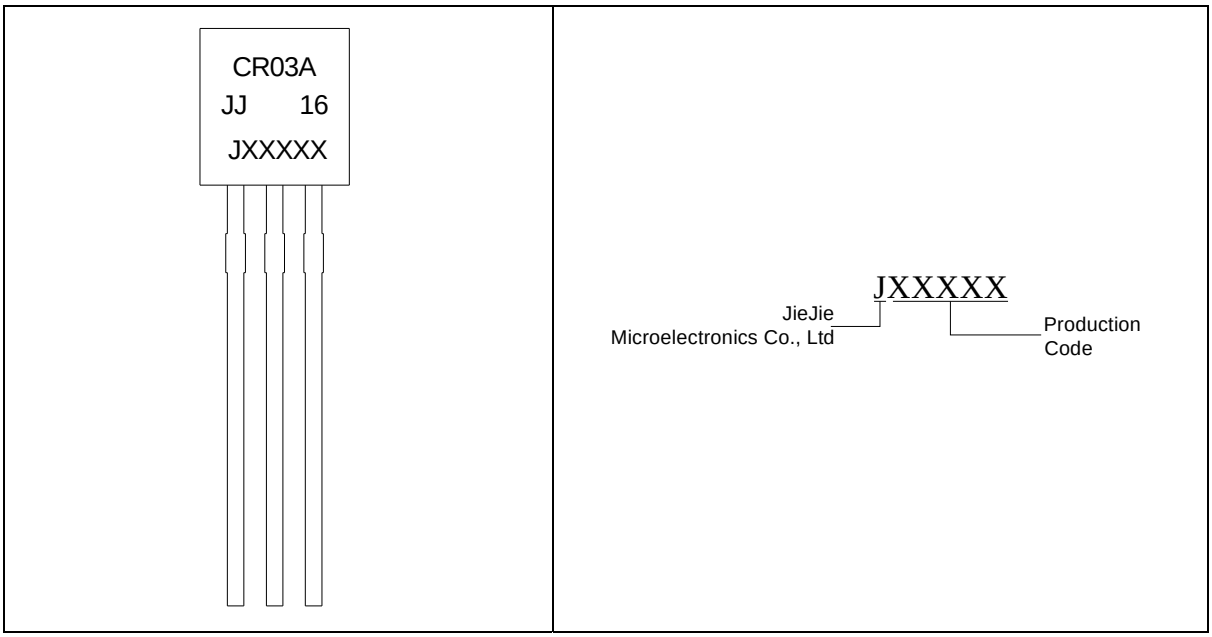

H L

M

FIG.1: Maximum power dissipation versus

FIG.5: Non-repetitive surge peak on-state current for a sinusoidal pulse with width t_p<10ms, and corresponding value of I^2t (dI/dt<100A/μs)

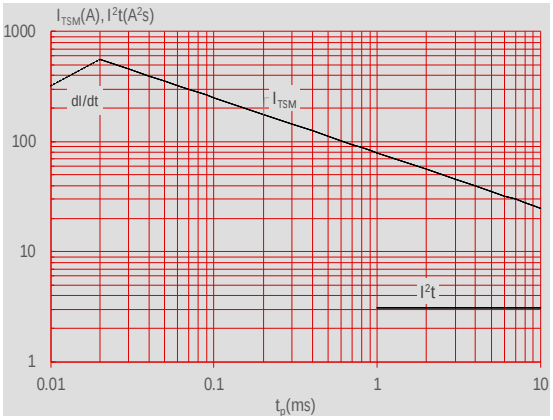


FIG.6: Relative variations of gate triggercurrent, holding current and latching current versus junction temperature


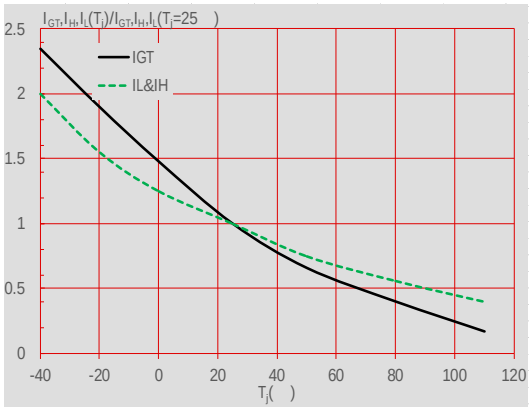


FIG.7 ÖTest circuit for inductive and resistive loads to IEC-61000-4-5 standards.

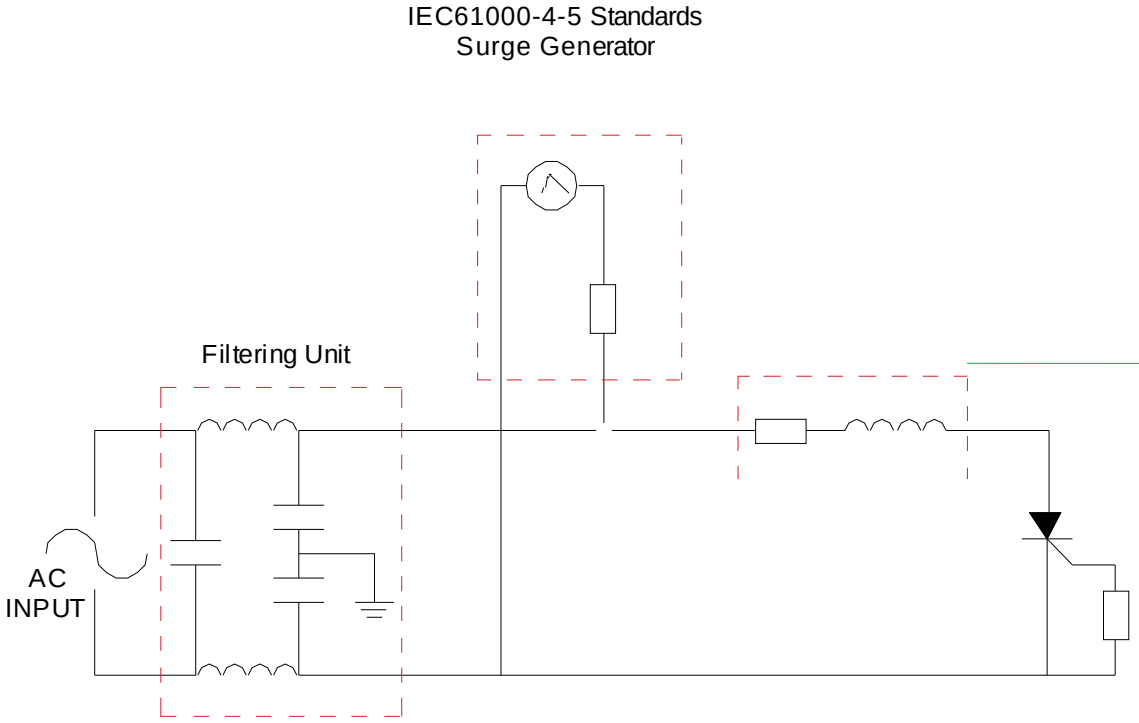

K Z Z / E ' / E & K Z D d / K E

Order code	Voltage V_{DRM}/V_{RRM} (V)	IGT(μA)	Package	Base qty. (pcs)	Delivery mode
CR03AM-16	1250	≤200	TO-92CR	1,000	Bulk Pack
CR03AM-16-TR				2,000	Tape & Reel

CR03AM-16 **,Dd ˜ ʞ N Ů ɑl ʻ M**