JX040Q 4A Sensitive SCR

Rev.A.1.0

DESCRIPTION:


The JX040Q SCR provides high dV/dt rate
with strong resistance to ele664 (t)253.9 (r)7 (o)10 (m)-3 (ag)10 (n)10 (et)2 (i)6 (c)4 ( )]TJ 0 Tc 0 T
hair, igniter etc. Package TO-126 is RoHS
compliant.

MAIN FEATURES

Symbol	Value	Unit

JX040Q **J**

ORDERING INFORMATION

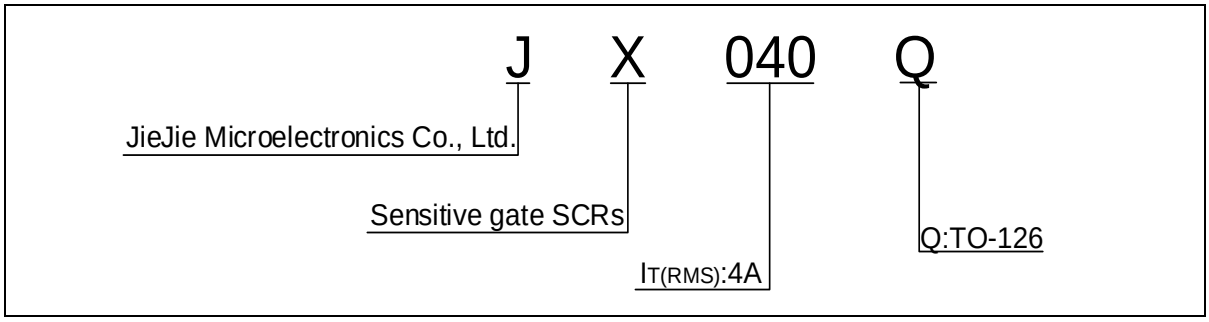

MARKING

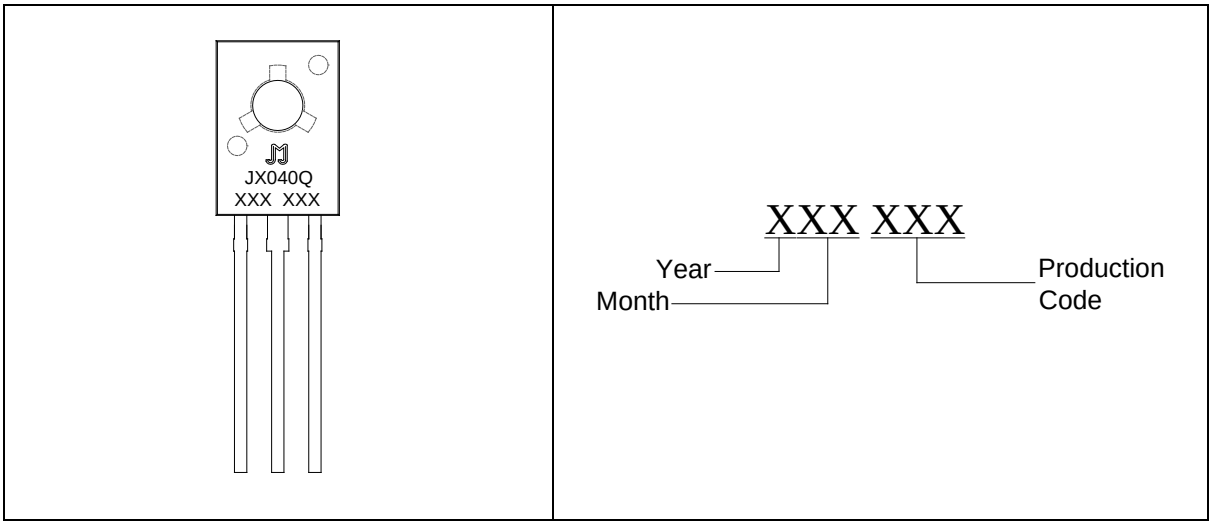


FIG.1: Maximum power dissipation versus RMS on-state current


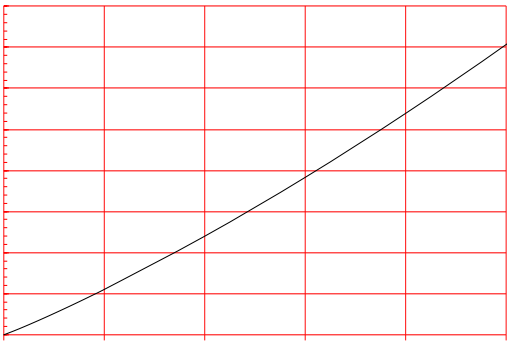


FIG.2: RMS on-state current versus case temperature

FIG.7 Test circuit for inductive and resistive loads to IEC-61000-4-5 standards.

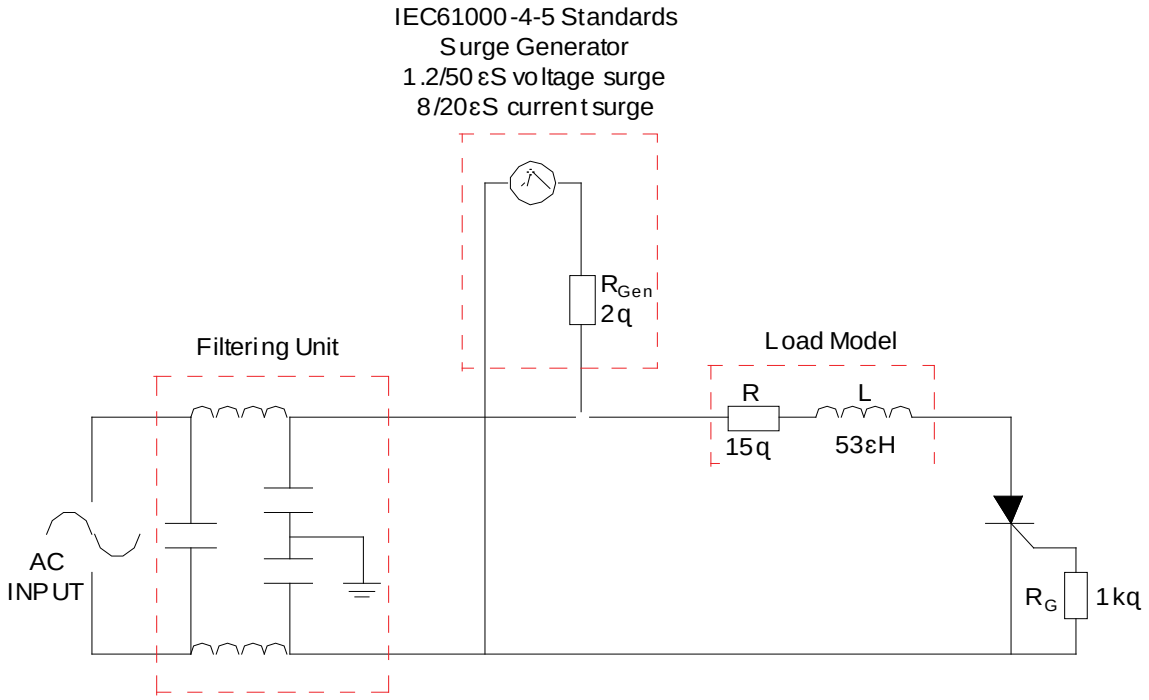


ORDERING INFORMATION

Order code	Voltage V_{DRM}/V_{RRM} (V)	IGT)	Package	Base qty. (pcs)	Delivery mode
JX040Q	200	5	Bulk Pack		

Document Revision History

Date	Revision	Changes
Apr.12, 2023	A.1.0	Last update

PACKAGE MECHANICAL DATA



M

M

6 6 6 0 8 . 0

R

A