T 25 35 H -6 A

- T: Triacs
- 25: $I_{T(RMS)}$:25A
- 35: I_{GT1-3} 35mA
- H: High junction temperature
- -6: V_{DRM} /V_{RRM} 600V
- A: A:TO-220A(Ins)

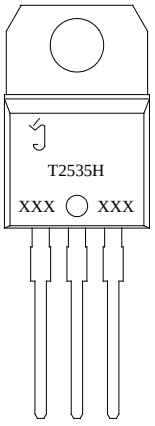


FIG.7 Test circuit for inductive and resistive loads to IEC-61000-4-5 standards



