ACJT1235-10E 12A TRIAC

Rev.A.1.0

DESCRIPTION:

The ACJT1235-10E [illegible] AC [illegible] I [illegible] ON/OFF [illegible] [illegible] [illegible] [illegible] The ACJT1235-10E [illegible] TVS [illegible]

P

(T$_j$; o -tp -t, FIG. 8)

FIG.1 M[illegible]RMS [illegible]

FIG.2: RMS [illegible] -[illegible]

FIG.7: R[illegible]
[illegible]
[illegible]

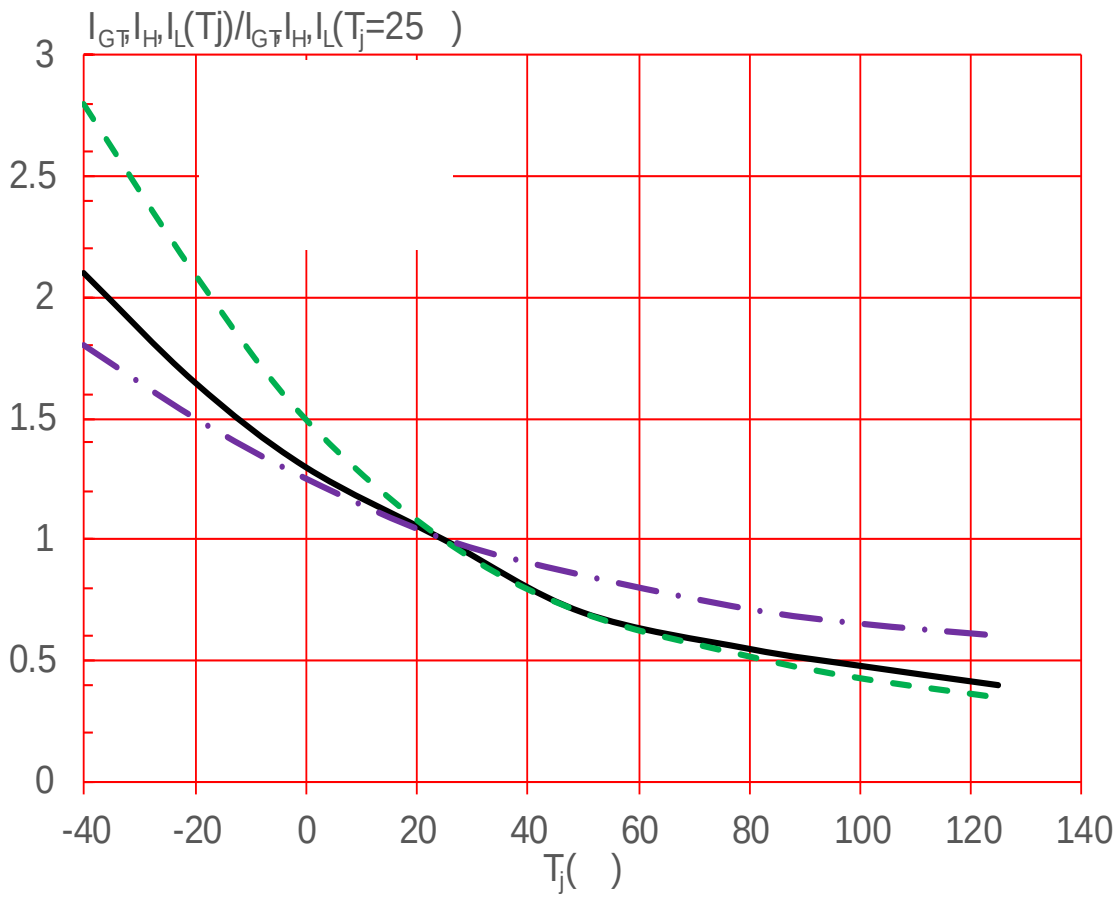
I_{GT},I_H,I_L(Tj)/I_{GT},I_H,I_L(T_j=25)
3
2.5
2
1.5
1
0.5
0
-40
-20
0
20
40
60
80
100
120
140
T_j( )

ORDERING INFORMATION

Order code	Voltage V_{DRM}/V_{RRM} (V)	IGT(mA)	Package	Base qty. (pcs)	Delivery mode
[redacted]	[redacted]	35	TO-263	50	Tube

PACKAGE MECHANICAL DATA

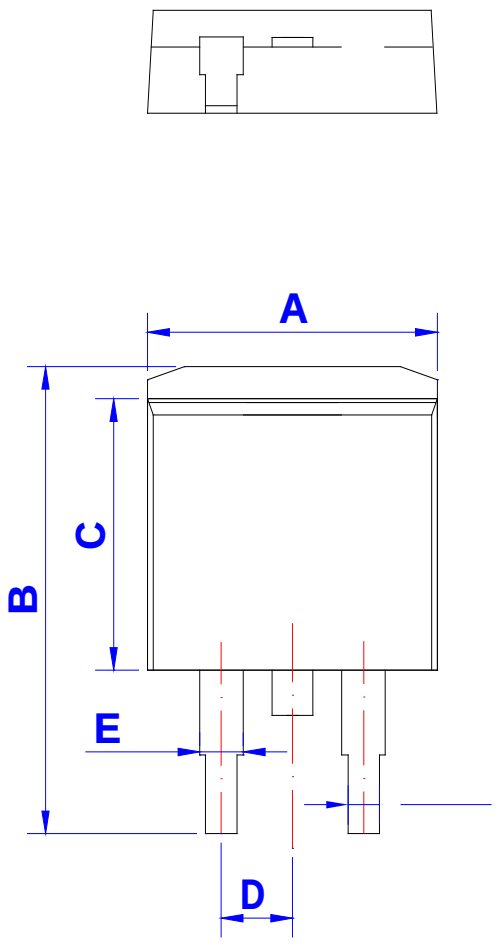

Ref	Dien					
	Mlen			Ie		
	Min	Typ	Max	Min	Typ	Max
A	9.90		10.[illegible]0	0.390		0.
B	1		15.80	0.579		0.6[illegible]
C	9.		9.60	0.37		0.378
D	[illegible].			0.09		
E	1.[illegible]0		1.50	0.0		0.059
F	0.75		0.85	0.09		0.033
G			1.50			
H				0.173		0.185
J	[illegible].30		[illegible].70	0.091		0.106
K	0.38		0.55	0.015		0.0[illegible]
L	0		0.[illegible]5			
M	1.[illegible]5		1.35			

DELIVERY MODE

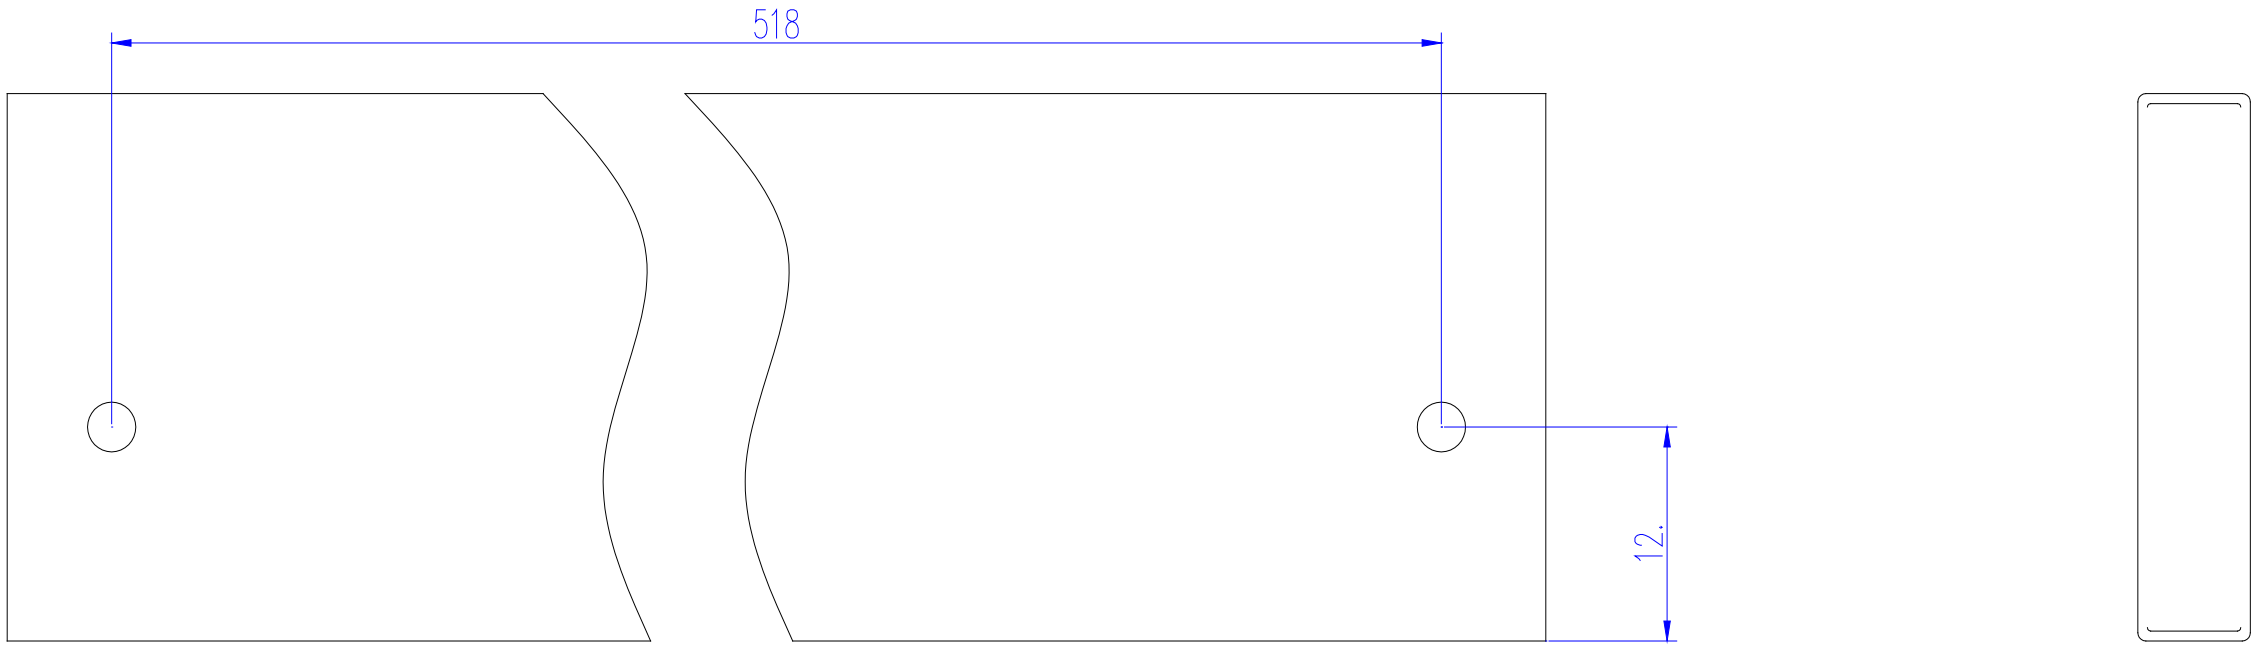

I [illegible] [illegible] H[illegible]
Ji[illegible] Co., Ltd. [illegible]
[illegible] I [illegible]
[illegible]
[illegible] J[illegible]
P [illegible]
J[illegible]
[illegible] T[illegible] [illegible]
[illegible] [illegible]
[illegible] Co., Ltd
C[illegible] [illegible]0[illegible] 3 J[illegible] Co., Ltd All [illegible]