
JST04A-800SW 4A

Peak gate current (t_p=20μs , T_j=125)	I_{GM}	4	A
Average gate power dissipation (T_j=125)	$P_{G(AV)}$	0.5	W
Peak gate power	P_{GM}	10	W
Peak pulse voltage (T_j=25 ; non-repetitive,off-state;FIG.7)	V		

ORDERING INFORMATION

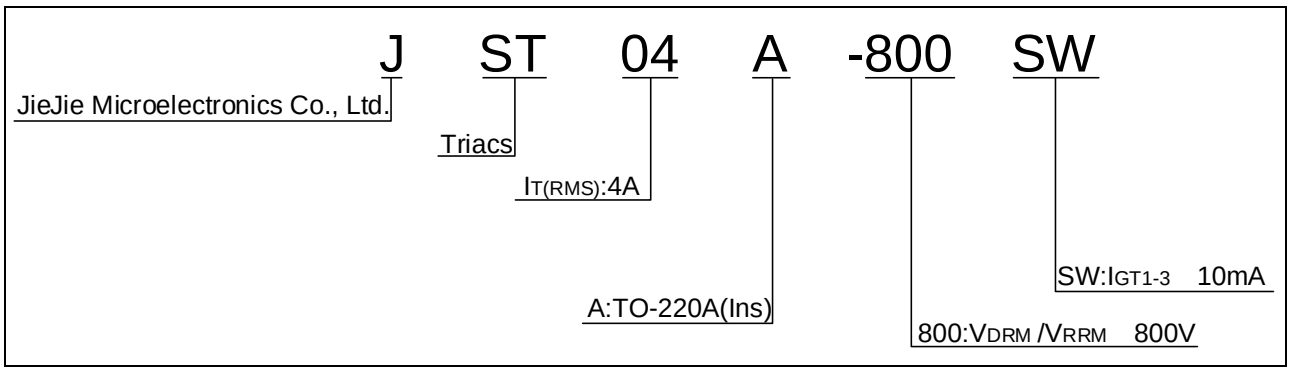

MARKING

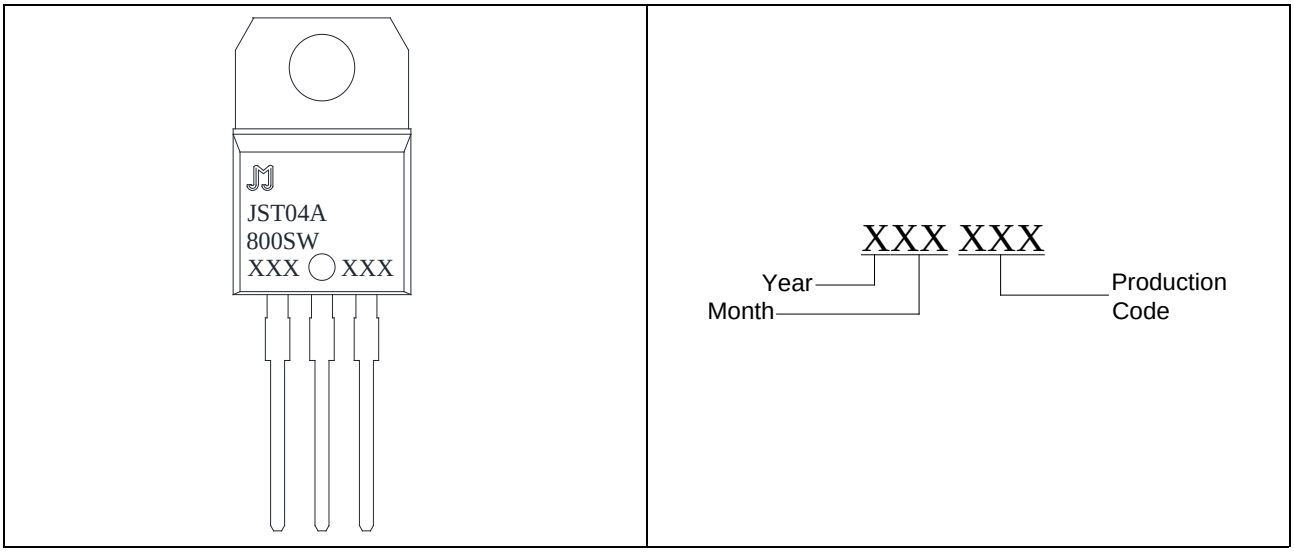


FIG.1: Maximum power dissipation versus RMS on-state current

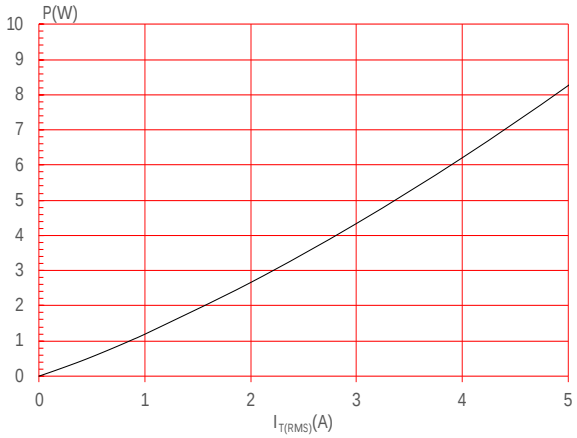


FIG.2: RMS on-state current versus case temperature


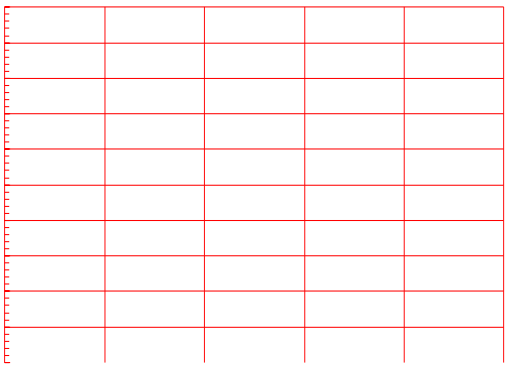


FIG.7 Test circuit for inductive and resistive loads to IEC-61000-4-5 standards



JST04A-800SW

PACKAGE MECHANICAL DATA

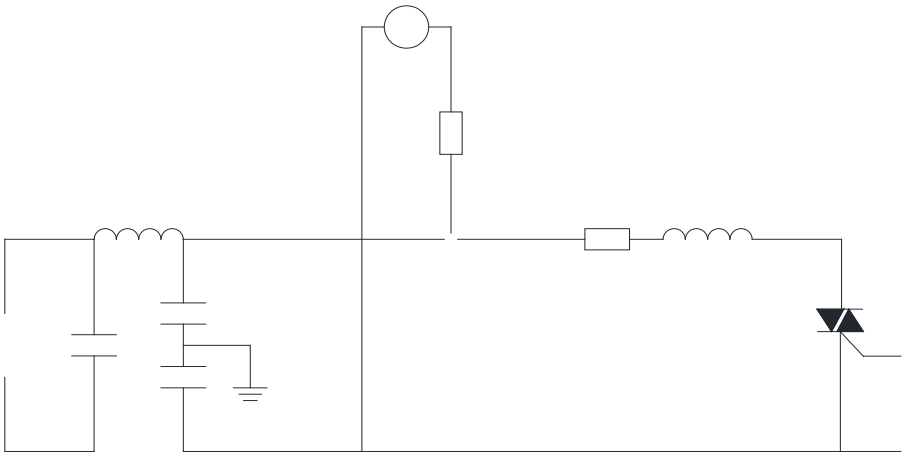