
JST12E-1000TW 12A TRIAC

Rev.A.1.1

DESCRIPTION:

The JST12E-1000TW triac is suitable for general purpose AC switching. It can be used as an ON/OFF function in applications such as heating regulation, induction motor starting circuits, for phase control operation in light dimmers, motor speed controllers. JST12E-1000TW snubberless triac is especially recommended for use on inductive loads. It can be driven directly through the MCU I/O port. Package TO-263 is RoHS compliant.

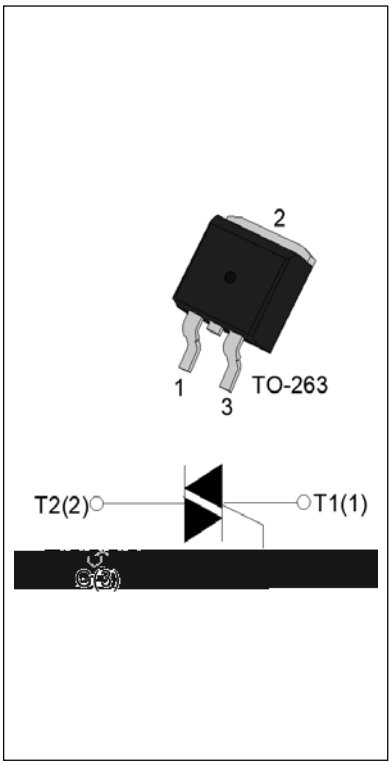

MAIN FEATURES

Symbol	Value	Unit
$I_{T(RMS)}$	12	A
V_{DRM}/V_{RRM}	1000	V
I_{GT} / /	5/5/5	mA

ABSOLUTE MAXIMUM RATINGS


Parameter	Symbol	Value	Unit
Storage junction temperature range	T_{stg}	-40-150	
Operating junction temperature range	T_j	-40-125	
Repetitive peak off-state voltage (T_j=25)	V_{DRM}	1000	V
Repetitive peak reverse voltage (T_j=25)	V_{RRM}	1000	V
RMS on-state current ($T_C \leq$ 103)	$I_{T(RMS)}$	12	A
Non repetitive surge peak on-state current (full cycle , t_p=20ms , T_j=25)	I_{TSM}	120	A
Non repetitive surge peak on-state current (full cycle , t_p=16.6ms , T_j=25)		132	
I^2t value for fusing (t_p=10ms , T_j=25)	I^2t	72	A^2s
Critical rate of rise of on-state current (I_G=2× I_{GT} , f=100Hz , T_j=125)	dI/dt	50	A/μs
Peak gate current (t_p=20μs , T_j=125)	I_{GM}	4	A
Average gate power dissipation (T_j=125)	$P_{G(AV)}$	0.5	W
Peak gate power	P_{GM}	10	W

Peak pulse voltage (T_j=25 ; non-repetitive,off-state;FIG.8)	V_{pp}	3.5	kV


ELECTRICAL CHARACTERISTICS (T_j=25 unless otherwise specified)

Symbol	Test Condition	Quadrant	Value		Unit
I_{GT}	V_D=12V R_L=33Ω	- -	MAX.	5	mA

ORDERING INFORMATION

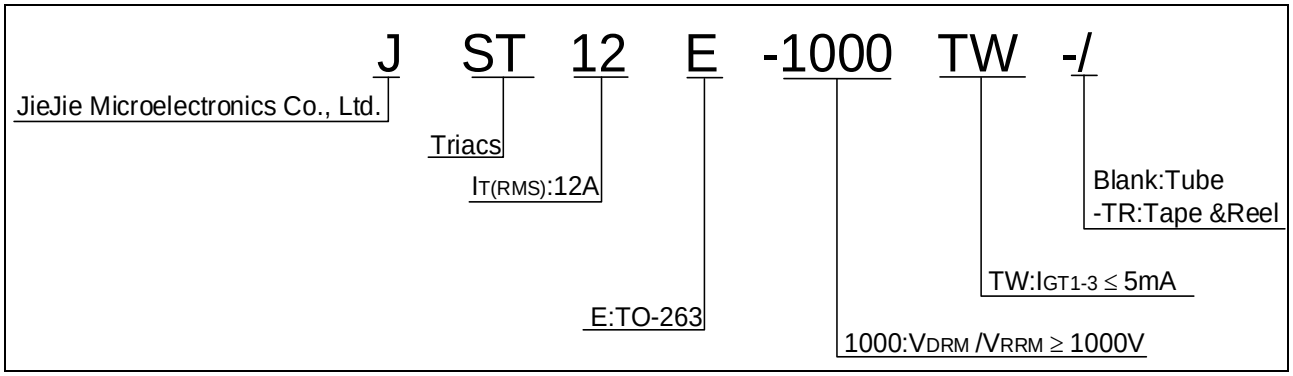

MARKING

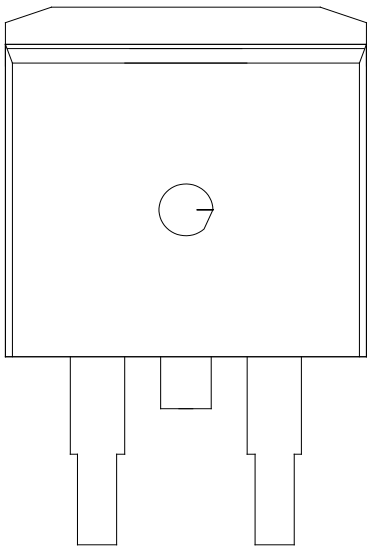


ORDERING INFORMATION

Order code	Voltage V_{DRM}/V_{RRM} (V)	IGT(mA)	Package	Base qty. (pcs)	Delivery mode
		- -			
JST12E-1000TW	1000	5	TO-263	50	Tube
JST12E-1000TW-TR				800	Tape & Reel

Document Revision History

Date	Revision	Changes
Apr.11, 2023	A.1.0	Last updated
Oct.20, 2025	A.1.1	

PACKAGE MECHANICAL DATA

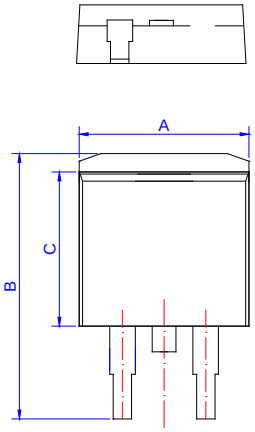

Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	9.90		10.20	0.390		0.402
B	14.70		15.80	0.579		0.622
C	9.40		9.60	0.370		0.378
D	2.40			0.094		
E	1.20		1.50	0.047		0.059
F	0.75		0.85	0.029		0.033