JST12F-800BW 12A TRIAC

Rev.A.1.1

DESCRIPTION:

ORDERING INFORMATION


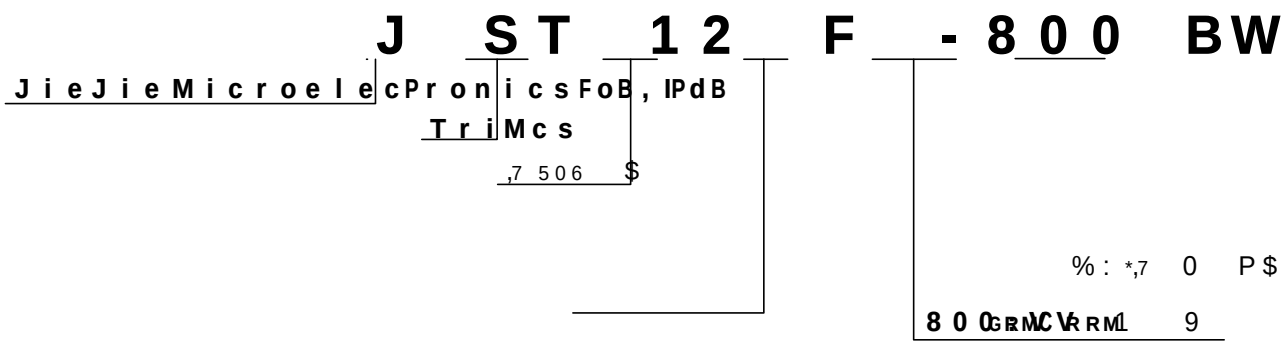


FIG.1: Maximum power dissipation versus RMS on-state current

FIG.2: RMS on-state current versus case temperature

FIG. 7 Ö 7HVW FLUFXLW IRU LQGXFWLYH DQG VWDQGDUGV OR

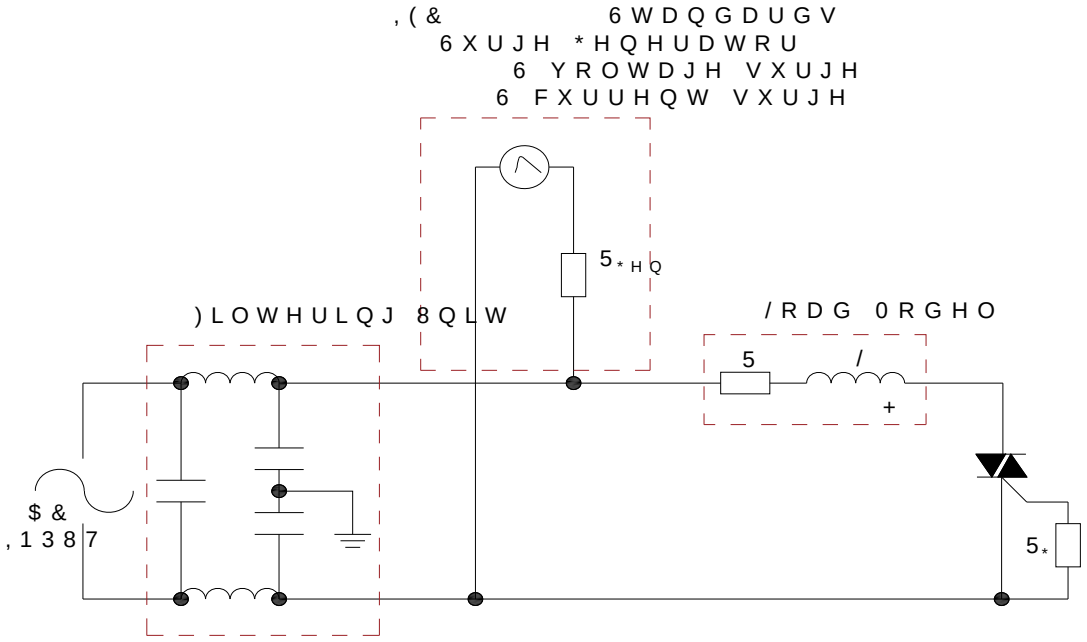

LEAD FORMING AND SOLDERING

R e f e r Po POe Mp p l i c MPi o n n oPe ñ A s s Pe mN liynHTOsPo u g Di- Oo ls efRoMrcTOWgreiòs r e
MÅŎNJ2Ŝ f ŜŎúNJ2ý Å Ŏ ă Φ

JST12F-800BW

In f ormation f urnis h ed in t h is d ocument is believed to be accurate and reliable. However, Jiangsu JieJie Microelectronics Co., Ltd. assumes no responsibility f or t h e consequences o f use wit h out consideration f or suc h in f ormation nor f or any in f ormation mentioned in t h is document is subject to c h ange wit h out notice, f rom t h at w h en an agreement is signed, Jiangsu JieJie complies wit h t h e agreement
Products and in f ormation provided in t h is document h ave no in f ringement o f patents. Jiangsu JieJie assumes no responsibility f or any in f ringement o f ot h er rig h ts o f t h ird parties w h ic h may result f rom t h e use o f suc h products and in f ormation. This document supersedes and replaces all in f ormation previously supplied.

JieJie is a registered trademark of Jiangsu JieJie Microelectronics Co., Ltd.

Copyright © 2015 Jiangsu JieJie Microelectronics Co., Ltd. All rights reserved.