JST131V-600T 1A TRIAC

Rev.A.1.1

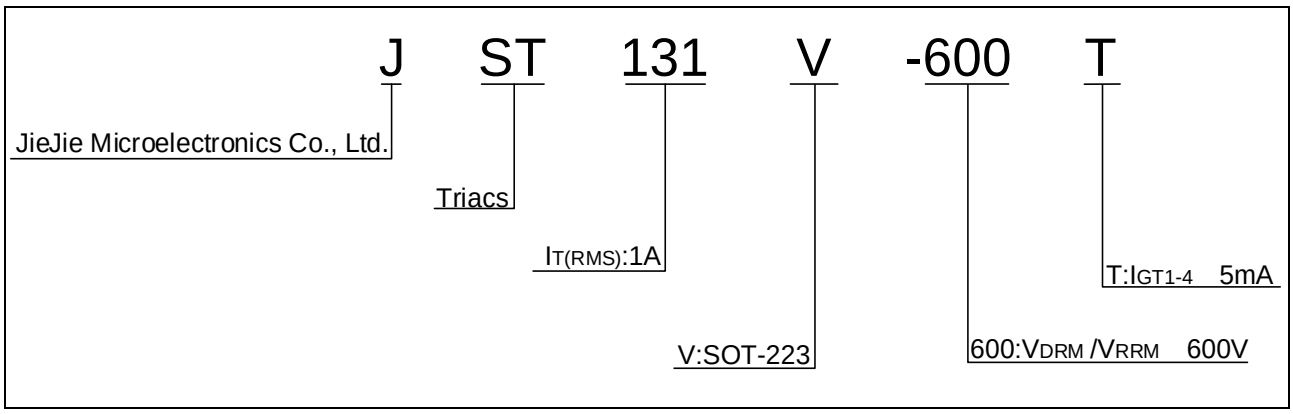
The JST131V-600T triac is suitable for general purpose AC switching. It can be used as an ON/OFF function in applications such as heating regulation, induction motor starting circuits, for phase control operation in light dimmers, motor speed controllers. Package SOT-223 is RoHS compliant.

Symbol	Value	Unit
$I_{T(RMS)}$	1	A

Parameter		Symbol	Value	Unit
Storage junction temperature range		T_{stg}	-40-150	
Operating junction temperature range		T_j	-40-125	
Repetitive peak off-state voltage (T_j=25)		V_{DRM}	600	V
Repetitive peak reverse voltage (T_j=25)		V_{RRM}	600	V
RMS on-state current (T_C 98)		$I_{T(RMS)}$	1	A
Non repetitive surge peak on-state current (full cycle , t_p=20ms , T_j=25)		I_{TSM}	16.5	A
Non repetitive surge peak on-state current (full cycle , t_p=16.6ms , T_j=25)			18	
I^2t value for fusing (t_p=10ms , T_j=25)		I^2t	1.36	A^2s
Critical rate of rise of on-state current (I_G=2 × I_{GT} , f=100Hz , T_j=125)	-	dI/dt	30	A/μs
	-		20	
Peak gate current (t_p=20μs , T_j=125)		I_{GM}	2	A
Average gate power dissipation (T_j=125)		$P_{G(AV)}$	0.5	W
Peak gate power		P_{GM}	5	W
Peak pulse voltage (T_j=25 ; non-repetitive,off-state;FIG.8)		V_{PP}	3.5	kV

(T_j=25 unless otherwise specified)

Symbol	Test Condition	Quadrant	Value		Unit
I_{GT}	V_D=12V R_L=33Ω	ALL	MAX.	5	mA
V_{GT}		ALL	MAX.	1.3	V
V_{GD}	V_D=V_{DRM} T_j=125 R_L=3.3kΩ	ALL	MIN.	0.2	V
I_L	I_G=1.2I_{GT}	- -	MAX.	5	mA
				10	
I_H	I_T=50mA		MAX.	5	mA
dV/dt	V_D=400V				


J
ST
131
V
-600
T
JieJie Microelectronics Co., Ltd.
Triacs
IT(RMS):1A
V:SOT-223
600:VDRM /VRRM 600V
T:IGT1-4 5mA

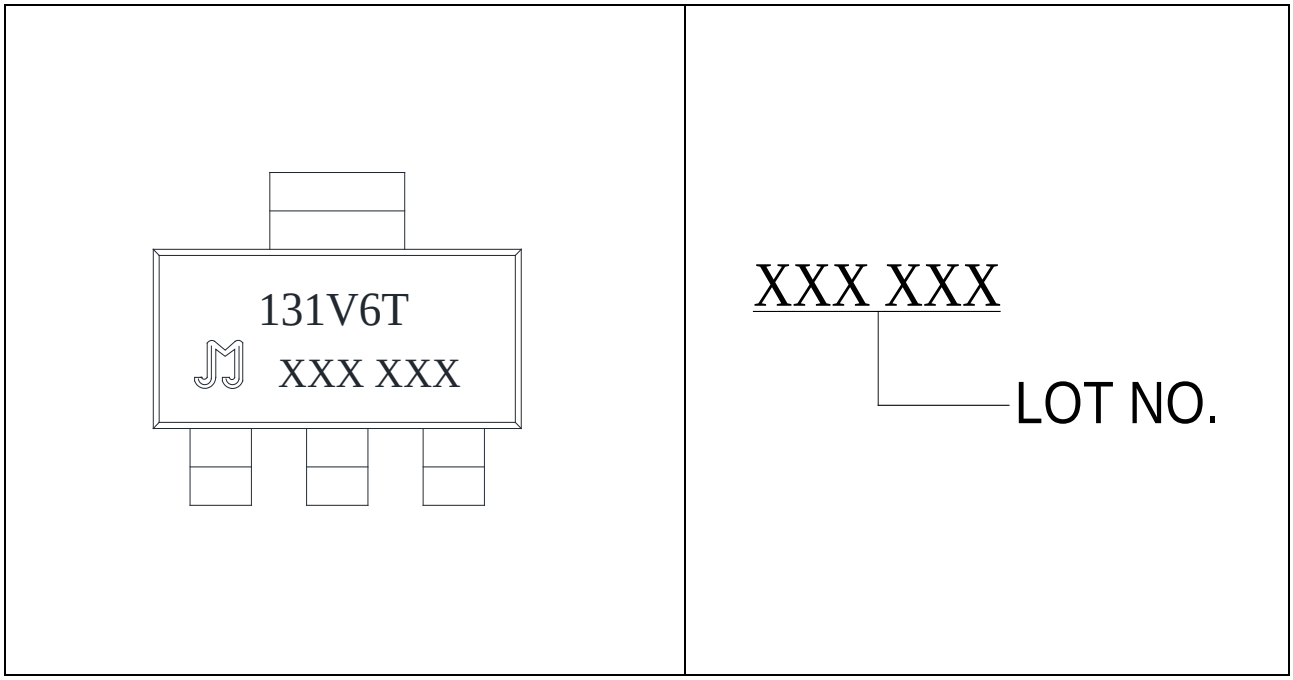

131V6T
XXX XXX
XXX XXX
LOT NO.

FIG.1: Maximum power dissipation versus RMS on-state current

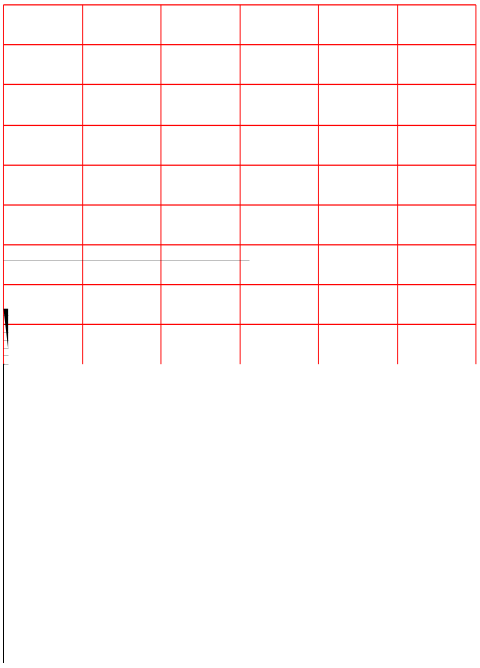


FIG.2: RMS on-state current versus case temperature

FIG.7: Relative variations of gate trigger current, holding current and latching current versus junction temperature

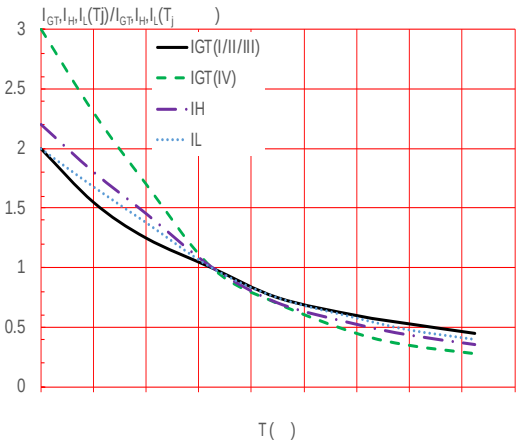
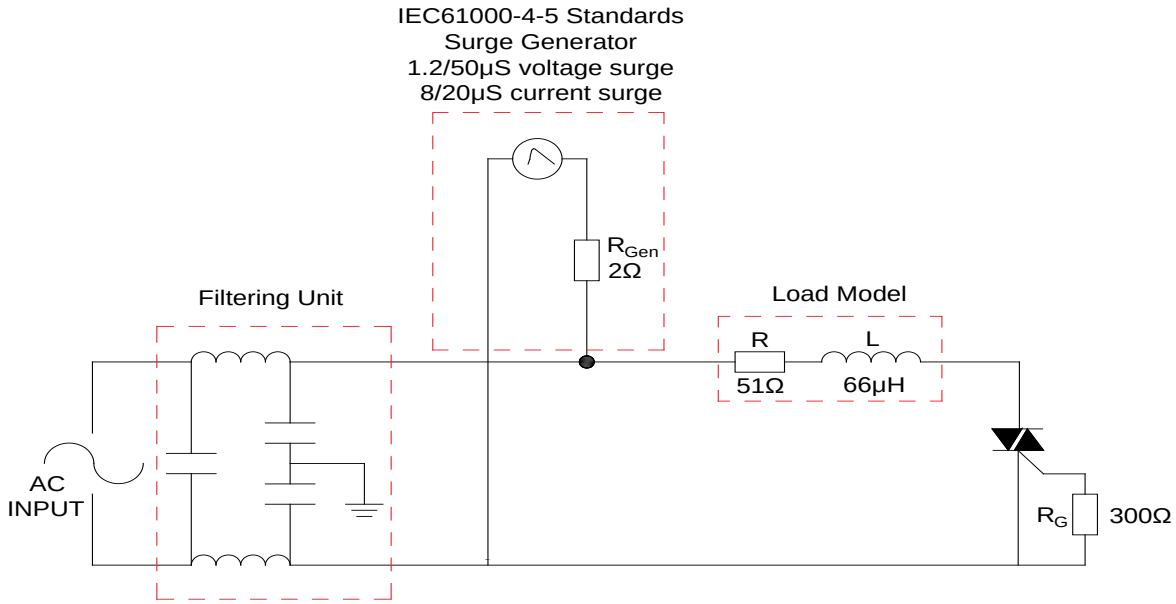
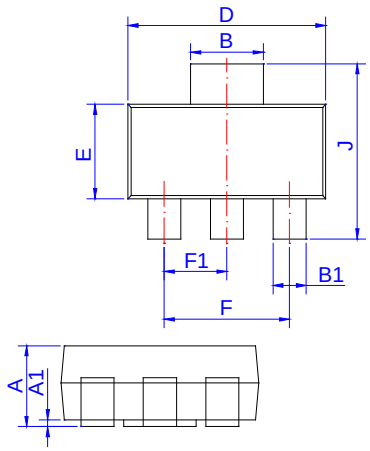


FIG.8 Test circuit for inductive and resistive loads to IEC-61000-4-5 standards



Order code	Voltage V_{DRM}/V_{RRM} (V)	IGT(mA)	Package	Base qty. (pcs)	



Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	1.50	1.60	1.80	0.059	0.063	0.071
A1	0.01	0.06	0.10	0.001	0.002	0.004
B	2.90	3.00	3.10	0.114	0.118	0.122
B1	0.60	0.70	0.80	0.024	0.028	0.031
C	0.22	0.26	0.32	0.009	0.010	0.013
D	6.30	6.50	6.70	0.248	0.256	0.264
E	3.30	3.50	3.70	0.130	0.138	0.146
F	4.40			0.173		
F1	2.20			0.087		
G	0.50		1.00	0.020		0.039
H	1.50	1.75	2.00	0.059	0.069	0.079
J	6.70	7.00	7.30	0.264	0.276	0.287
K	0.80		1.00			0.039