JST134W-800T 1A TRIAC

Rev.A.1.1

DESCRIPTION:

The JST134W-800T triac is suitable for general purpose AC switching. It can be used as an ON/OFF function in applications such as heating regulation, induction motor starting circuits, for phase control operation in light dimmers, motor speed controllers. Package SOT-223-2L is RoHS compliant.

MAIN FEATURES

ABSOLUTE MAXIMUM RATINGS

Parameter		Symbol	Value	Unit
Storage junction temperature range		T_{stg}	-40-150	
Operating junction temperature range		T_j	-40-125	
Repetitive peak off-state voltage (T_j=25)		V_{DRM}	800	V
Repetitive peak reverse voltage (T_j=25)		V_{RRM}	800	V
RMS on-state current (T_C 0104)		$I_{T(RMS)}$	1	A
Non repetitive surge peak on-state current (full cycle , t_p=20ms , T_j=25)		I_{TSM}	20	A
Non repetitive surge peak on-state current (full cycle , t_p=16.6ms , T_j=25)			22	
I^2t value for fusing (t_p=10ms , T_j=25)		I^2t	2	A^2s
Critical rate of rise of on-state current (I_G=2×I_{GT} , f=100Hz , T_j=125)	-	dI/dt	30	A s

ELECTRICAL CHARACTERISTICS (T_j=25 unless otherwise specified)

Symbol	Test Condition	Quadrant	Value		Unit
I_{GT}	V_D=12V R_L=33	ALL	MAX.	5	mA
V_{GT}		ALL	MAX.	1.3	V
V_{GD}	V_D=V_{DRM} T_j=125 R_L=3.3k	ALL	MIN.	0.2	V
I_L	I_G=1.2I_{GT}	- -	MAX.	9	mA
				13	
I_H	I_T=100mA		MAX.	5	mA
dV/dt	V_D=540V Gate Open T_j=110		MIN.	20	V s
(dV/dt)c	(dI/dt)c=1.8A/ms, T_j=110		MIN.	1.2	9 V
t_{on}	I_G=10mA I_A=200mA I_R=20mA T_j=25		TYP.	2	s
t_{off}				20	

STATIC CHARACTERISTICS

Symbol	Parameter		Value(MAX.)	Unit
V_{TM}	I_{TM}=5A t_p=380 s	T_j=25	1.55	V
V_{TO}	Threshold voltage	T_j=125	0.92	V
R_D	Dynamic resistance	T_j=125	107	P

I

ORDERING INFORMATION

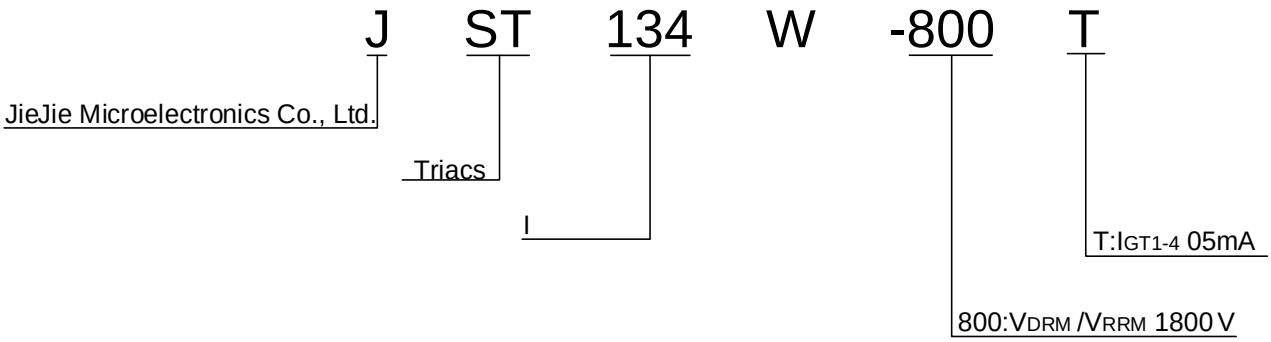


FIG.1: Maximum power dissipation versus RMS on-state current

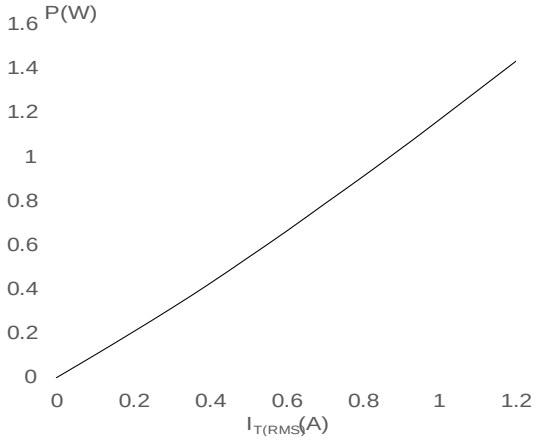


FIG.2: RMS on-state current versus case temperature


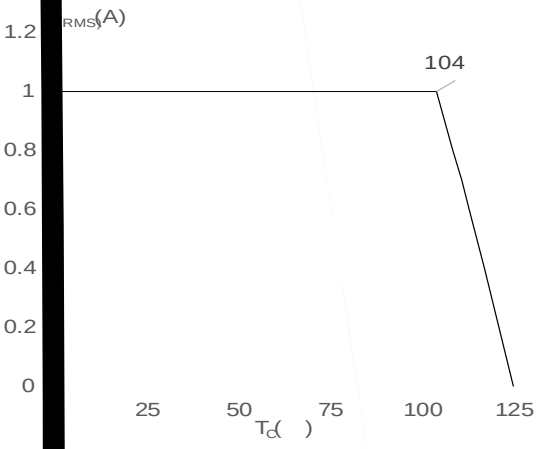


FIG.3: RMS on-state current versus ambient temperature (printed circuit board FR4, copper thickness: P (full cycle)

FIG.4: Surge peak on-state current versus number of cycles0

FIG.8 ÖTest circuit for inductive and resistive loads to IEC-61000-4-5 standards

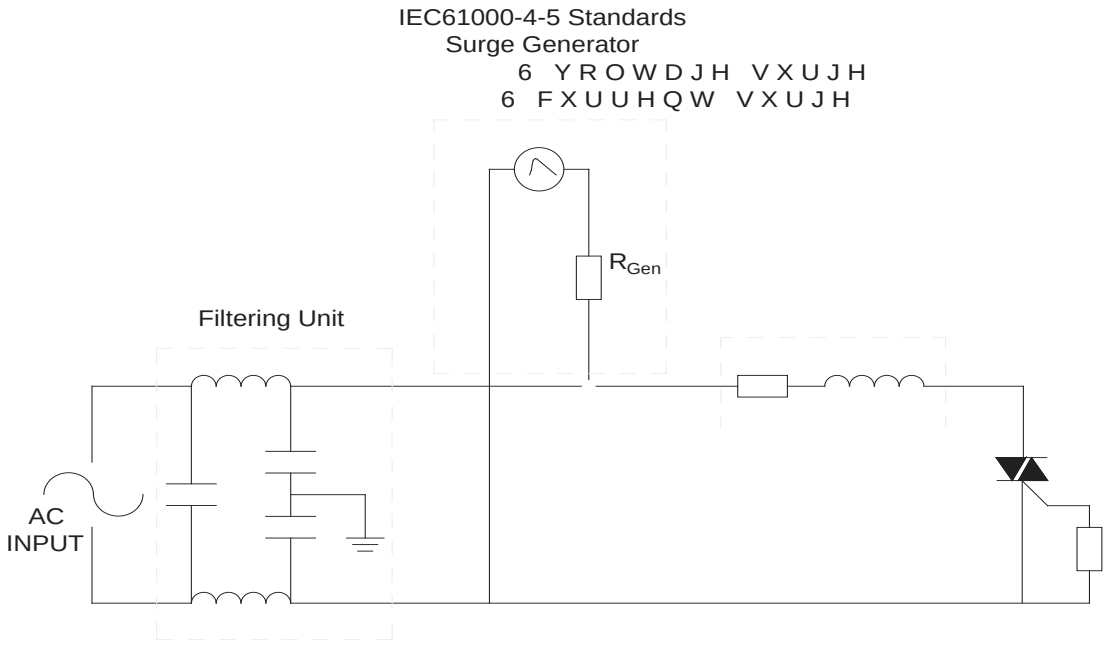

DELIVERY MODE

Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
W	-		12.30	-		0.482
E	1.65	1.75	1.85	0.065	0.069	0.073
F	5.45	5.50	5.55	0.215	0.217	0.219
D0		1.55	1.60		0.061	0.063
D1		-	-			
P0	3.90	4.00	4.10	0.154	0.157	0.161
P1	7.90	8.00	8.10	0.311	0.315	0.319
P2	1.95	2.00	2.05	0.077	0.079	0.081
10P0	39.80	40.00	40.20	1.567	1.575	1.583
A0	6.85	6.95	7.05	0.269	0.273	0.276
B0	7.15	7.25	7.35	0.280	0.284	0.288
K0	1.95	2.05	2.15	0.076	0.080	0.084
T	0.20	0.25	0.30		0.010	0.0120w