JST136F-600D 4A TRIAC

Rev.A.1.1

DESCRIPTION:


The JST136F-600D triac is suitable for general purpose AC switching. It can be used6JST13

power	P_{GM}	5	W
e voltage non-repetitive,off-state;FIG.7)	V_{pp}	3.5	kV


L CHARACTERISTICS (T_j=25 unless otherwise specified)

Test Condition	Quadrant	Value		Unit
	- -	MAX.	5	mA
V_D=12V R_L=33Ω	V			

ORDERING INFORMATION

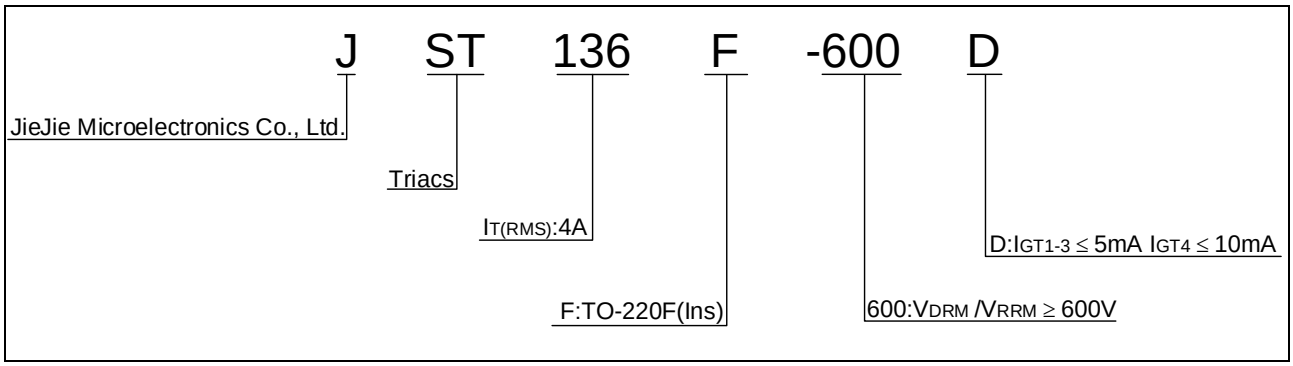

MARKING

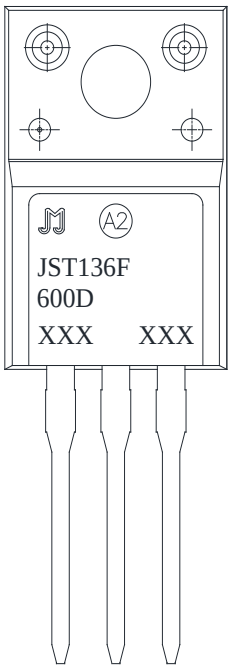





FIG.1: Maximum power dissipation versus RMS on-state current

FIG.2: RMS on-

FIG.7 Test circuit for inductive and resistive loads to IEC-61000-4-5 standards

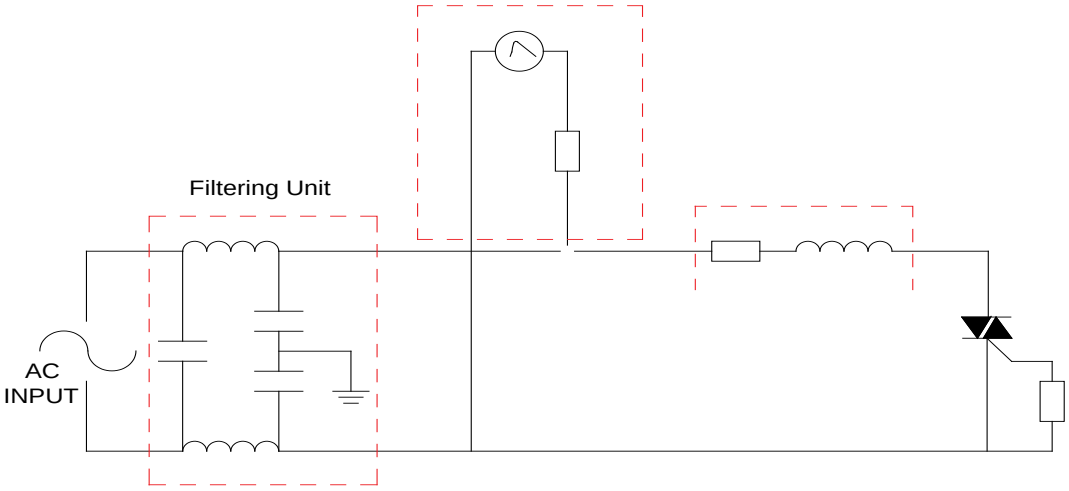

ORDERING INFORMATION

Order code	Voltage V_{DRM}/V_{RRM} (V)	IGT(ø( )Tj ET EMC 0.c 0 ( )cn 56.78 89..7 97.14 15.c 0 ( )c 148.9

PACKAGE MECHANICAL DATA

