
ELECTRICAL CHARACTERISTICS (T_j=25 unless otherwise specified)

Symbol	Test Condition	Quadrant	Value		Unit
I_{GT}	V_D=12V R_L=33	ALL	MAX.	5	mA
V_{GT}		ALL	MAX.	1	V
V_{GD}	V_D=V_{DRM} T_j=125 R_L=3.3k	ALL	MIN.	0.2	V
I_L	I_G=1.2I_{GT}	-	MAX.	10	mA
		-		15	
I_H	I_{T-}				

ORDERING INFORMATION

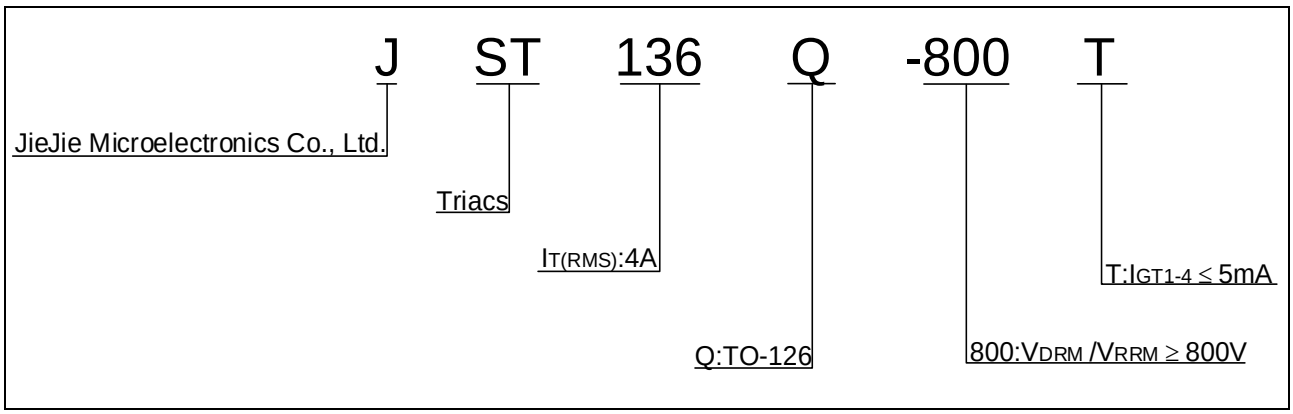

MARKING

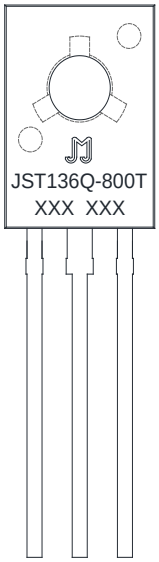


FIG.1: Maximum power dissipation versus RMS on-state current

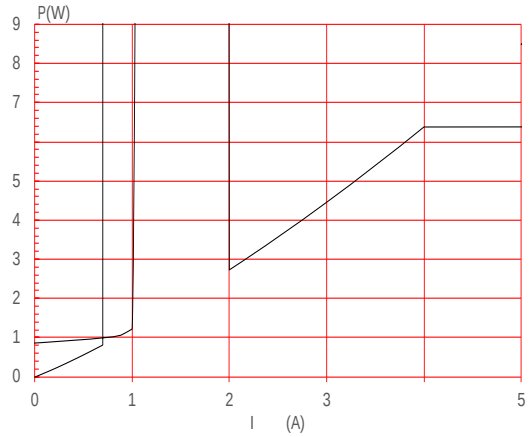


FIG.2: RMS on-state current versus case temperature


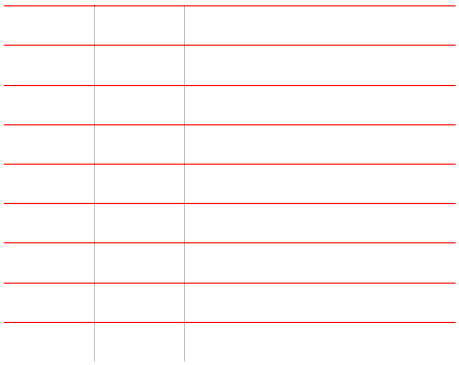


FIG.7 Test circuit for inductive and resistive loads to IEC-61000-4-5 standards

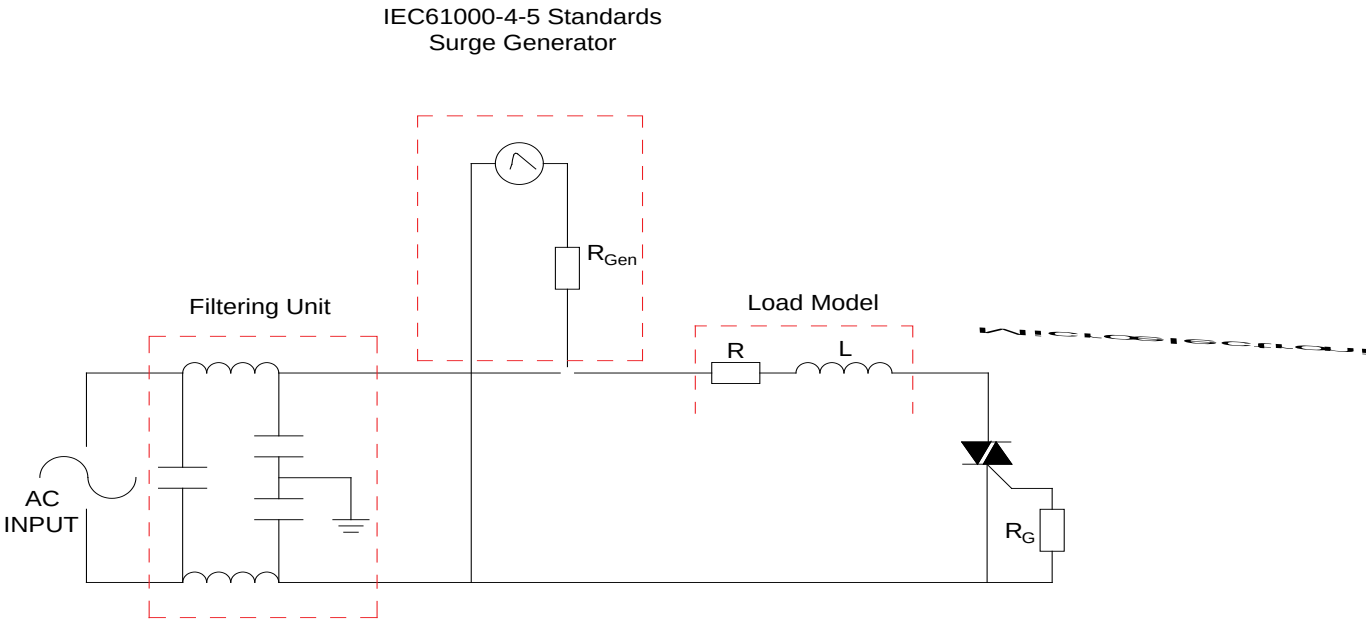

ORDERING INFORMATION

Order code	Voltage V_{DRM}/V_{RRM} (V)	IGT(mA)	Package	Base qty. (pcs)	Delivery mode
		- - -			
JST136Q-800T	800	5	TO-126	500	Bulk Pack

Document Revision History

Date	Revision	Changes
Apr.14, 2023	A.1.0	

Information furnished in this document is believed to be accurate and reliable. However,