
ELECTRICAL CHARACTERISTICS (T_j=25 unless otherwise specified)

Symbol	Test Condition	Quadrant	Value		Unit
I_{GT}	V_D=12V R_L=33	- -	MAX.	5	mA
				10	
V_{GT}		ALL	MAX.	1	V
V_{GD}	V_D=V_{DRM} T_j=125 R_L=3.3k	ALL	MIN.	0.2	V
I_L	I_G=1.2I_{GT}	- -	MAX.	20	mA
				30	
I_H	I_T=100mA		MAX.	15	mA
dV/dt	V_D=540V Gate Open T_j=125		MIN.	80	V s
(dV/dt)c	(dI/dt)c=2A/ms, T_j=125		MIN.	2	
t_{on}	I_G=20mA I_A=200mA I_R=20mA T_j=25		TYP.	1.5	s
t_{off}				15	


STATIC CHARACTERISTICS

Symbol	Parameter		Value(MAX.)	Unit
V_{TM}	I_{TM}=10A t_p=380 s	T_j=25	1.6	V
V_{TO}	Threshold voltage	T_j=125	0.86	V
R_D	Dynamic resistance	T_j=125	75	
I_{DRM}	V_D=V_{DRM} V_R=V_{RRM}	T_j=25	5	A
I_{RRM}		T_j=125		

ORDERING INFORMATION

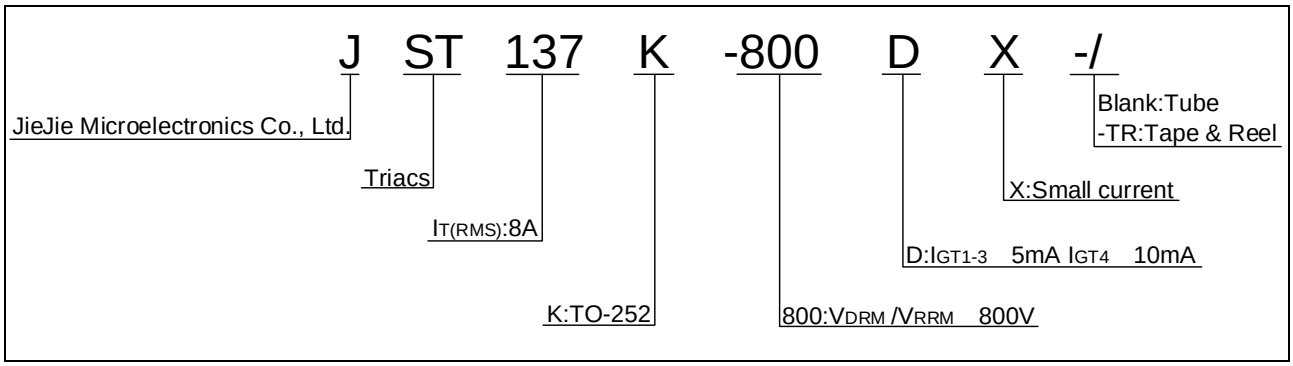

MARKING

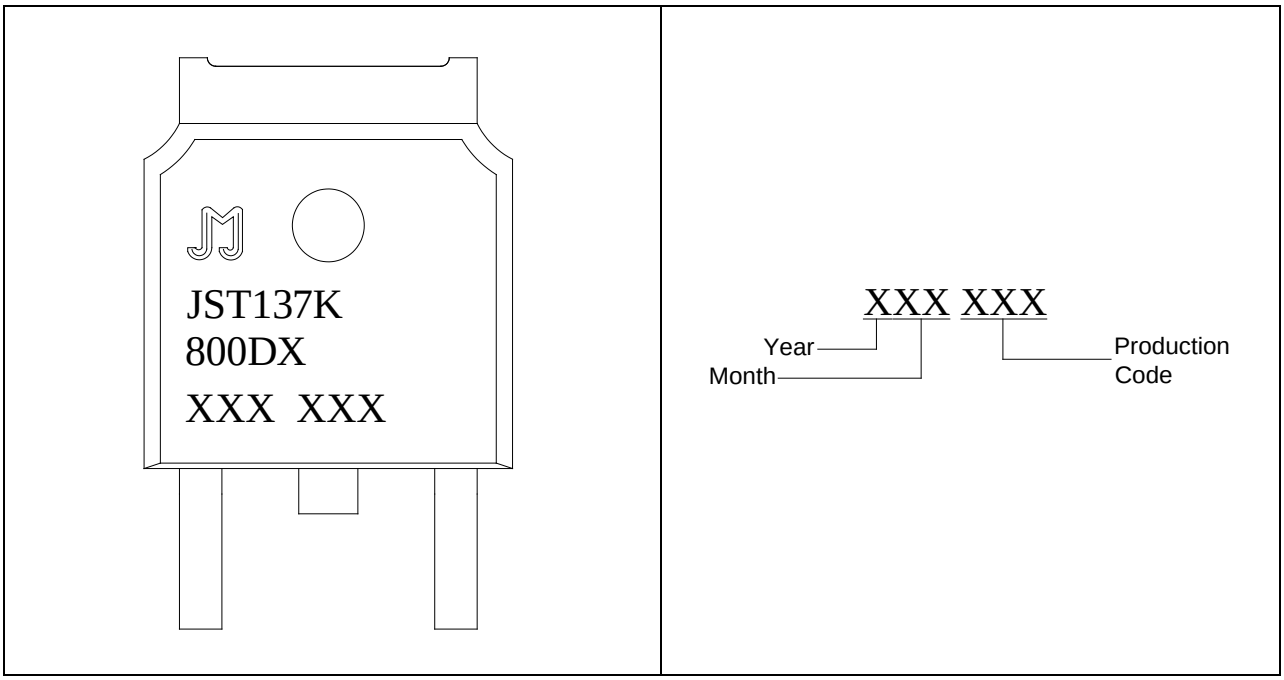

JST137K-800DX

FIG.7: Relative variations of gate trigger current, holding current and latching current versus junction temperature

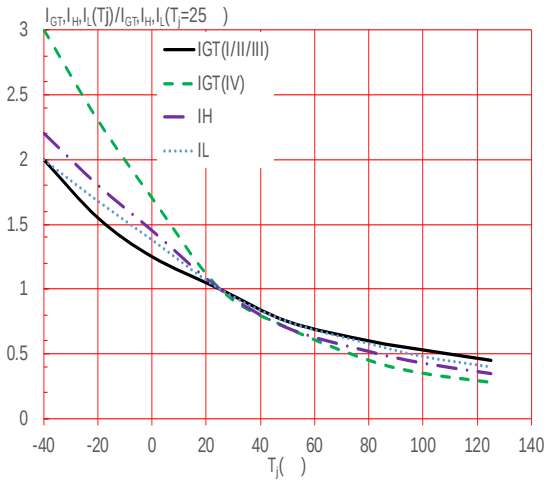


FIG.8

€ € € (€6€ €F€X€U€U€H€Q€V€ €V€X€U€J€HRGe ne•'(R Đ

ORDERING INFORMATION


Order code	Voltage V_{DRM}/V_{RRM} (V)	IGT(mA)		Package	Base qty. (pcs)	Delivery mode
		- -				
JST137K-800DX	800	5	10	TO-252	80	Tube
JST137K-800DX-TR					2,500	Tape & Reel

Document Revision History

Date	Revision	Changes
Apr.14, 2023	A.1.0	Last updated
Oct.22, 2025	A.1	

PACKAGE MECHANICAL DATA

		Dimensions					
	Ref.	Millimeters			Inches		
		Min.	Typ.	Max.	Min.	Typ.	Max.
	A	2.10		2.50	0.083		0.098
	A2	0		0.15	0		0.006
	B	0.66		0.86	0.026		0.034
	C	0.40		0.60	0.016		0.024
	D	5.90		6.30	0.232		0.248
	E	6.40		6.80	0.252		0.268
	G	4.47		4.67	0.176		0.184
	G1	2.18		2.38	0.086		0.094
	L	1.09		1.21	0.043		0.048
B2EH	L2	1.352.0.L			0.053		0.065



Information furnished in this document is believed to be accurate and reliable. However, Jiangsu JieJie Microelectronics Co., Ltd assumes no responsibility for the consequences of use without consideration for such information nor use beyond it. Information mentioned in this document is subject to change without notice, apart from that when an agreement is signed, Jiangsu JieJie complies with the agreement.
Products and information provided in this document have no infringement of patents. Jiangsu JieJie assumes no responsibility for any infringement of other rights of third parties which may result from the use of such products and information. This document supersedes and replaces all information previously supplied.

is a registered trademark of Jiangsu JieJie Microelectronics Co., Ltd.

Copyright © 2025 Jiangsu JieJie Microelectronics Co., Ltd. All rights reserved.