JST16F-600CW 16A TRIAC

Rev.A.1.2

DESCRIPTION:

The JST16F-600CW triac is suitable for general purpose AC switching. It can be used as an ON/OFF function in applications such as heating regulation, induction motor starting circuits, for phase control operation in light dimmers, motor speed controllers. JST16F-600CW snubberless triac is especially recommended for use on inductive loads. By using an external plastic package, JST16F-600CW provides a rated insulation voltage of 2000 VRMS, complying with UL standards (File ref: E252906). Package TO-220F is RoHS compliant.

MAIN FEATURES

ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Value	Unit
Storage junction temperature range	T_{stg}	-40-150	
Operating junction temperature range	T_j	-40-125	
Repetitive peak off-state voltage (T_j=25)	V_{DRM}	600	V
Repetitive peak reverse voltage (T_j=25)	V_{RRM}	600	V
RMS on-state current ($T_C \leq 73$)	$I_{T(RMS)}$	16	A
Non repetitive surge peak on-state current (full cycle , t_p=20ms , T_j=25)	I_{TSM}	190	A
Non repetitive surge peak on-state current (full cycle , t_p=16.6ms , T_j=25)		209	
I^2t value for fusing (t_p=10ms , T_j=25)	I^2t	180	A^2s


Peak gate power	P_{GM}	10	W
Peak pulse voltage (T_j=25 ; non-repetitive,off-state;FIG.7)	V_{pp}	4	kV

ELECTRICAL CHARACTERISTICS (T_j=25 unless otherwise specified)

Symbol	Test Condition	Quadrant	Value		Unit
I_{GT}	V_D =12V R_L =33Ω	- -	MAX.	35	mA
V_{GT}		- -	MAX.	1	V
V_{GD}	V_D =V_{DRM} T_j =125 R_L =3.3kΩ	- -	MIN.	0.2	V
I_L	I_G =1.2I_{GT}	-	MAX.	50	mA
				60	

$I_{H\ GMTA60}$

ORDERING INFORMATION

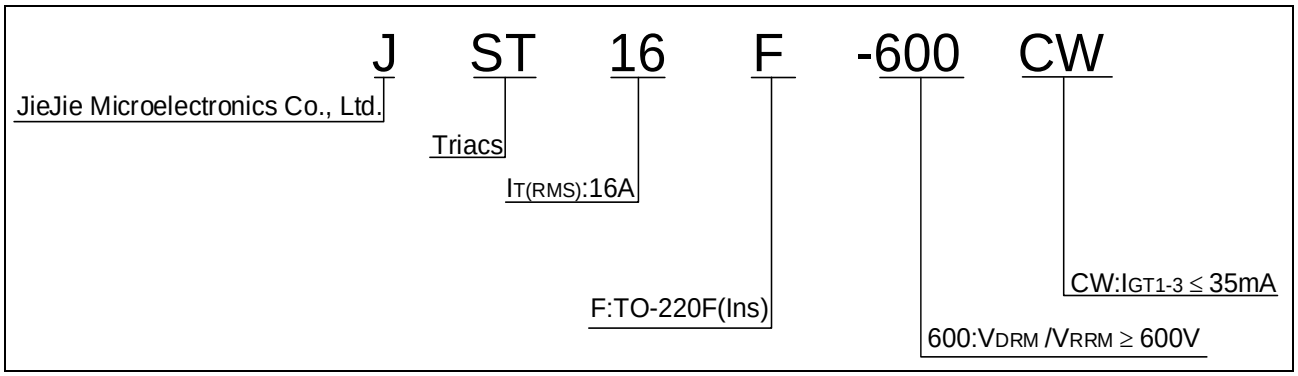

MARKING

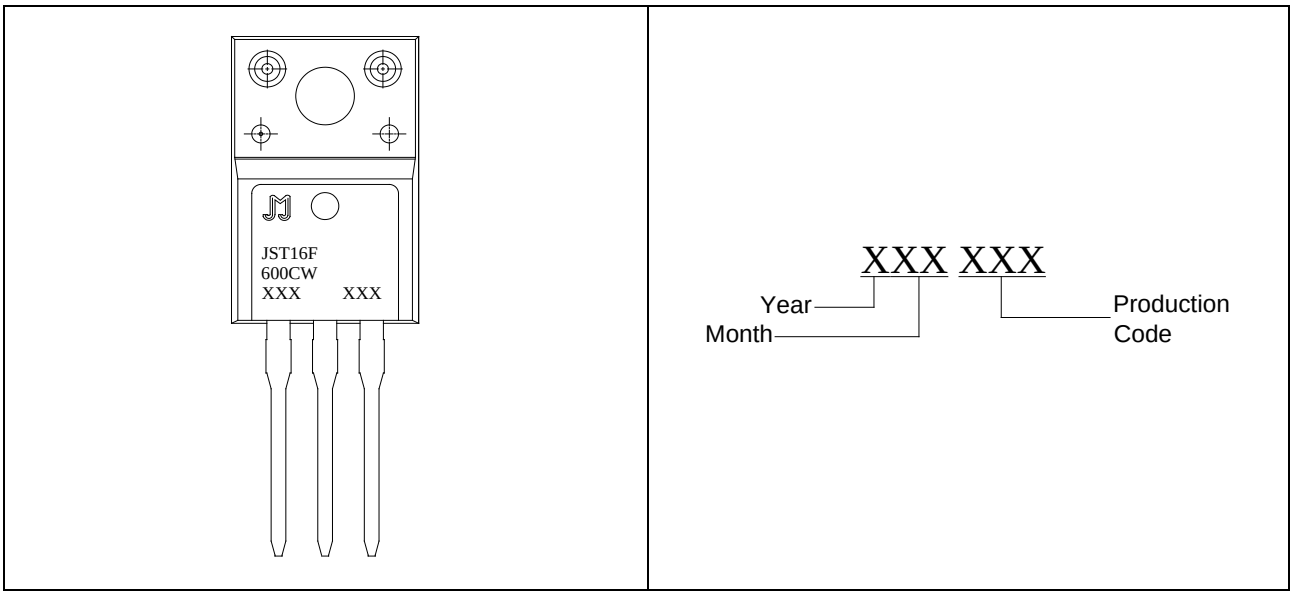


FIG.1: Maximum power dissipation versus RMS on-state current


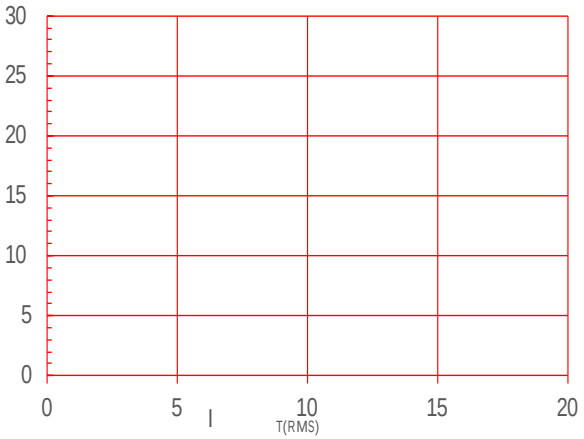


FIG.2: RMS on-state current versus case temperature



FIG.7 Test circuit for inductive and resistive loads to IEC-61000-4-5 standards

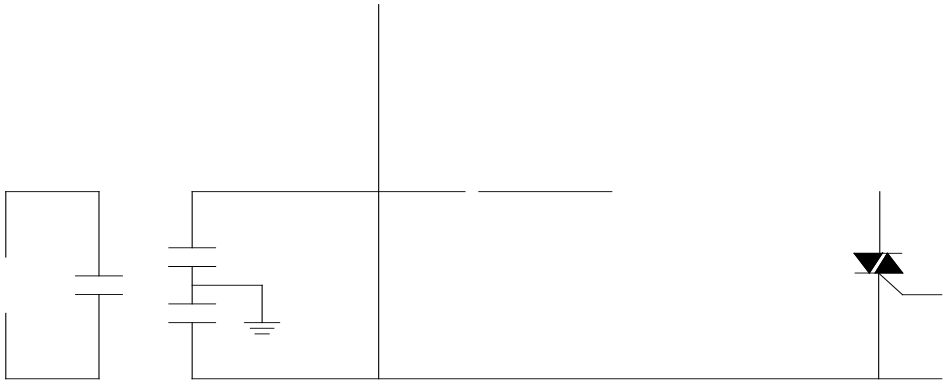

ORDERING INFORMATION

Order code	Voltage V_{DRM}/V_{RRM} (V)	IGT(mA)	Package	Base qty. (pcs)	Delivery mode

PACKAGE MECHANICAL DATA

