JST16i-800CW 16 A TRIAC Rev.A.1.1


DESCRIPTION:

MAIN FEATURES

ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Value	Unit
Storage	T_{stg}	-40 to 150	
Junction	T_j	-40 to 125	
Repetitive peak off-state voltage (Tj=25°C)	V_{DRM}	800	V
Repetitive peak off-state voltage (Tj=125°C)	V_{DRM}	800	V
RMS on-state current (full sine wave, Tc=85°C)	$I_{T(RMS)}$	16	A

ORDERING INFORMATION

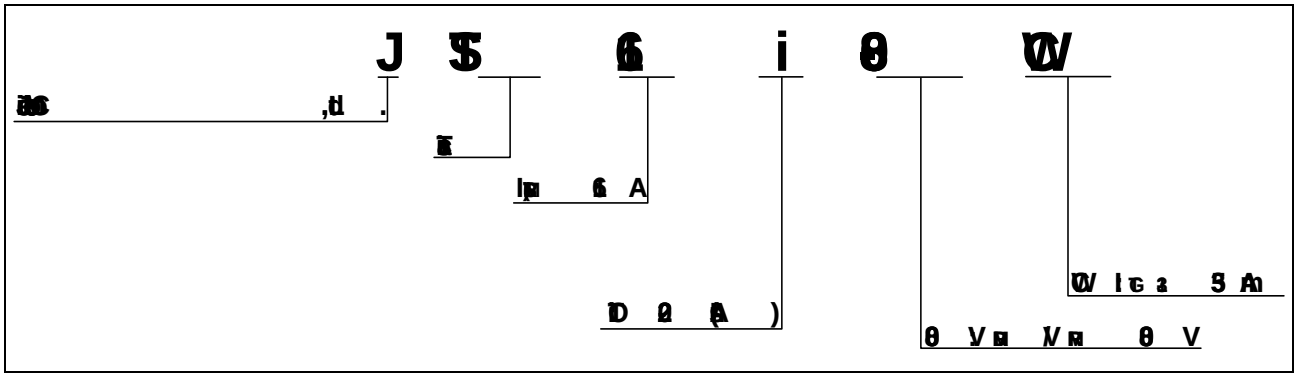

MARKING

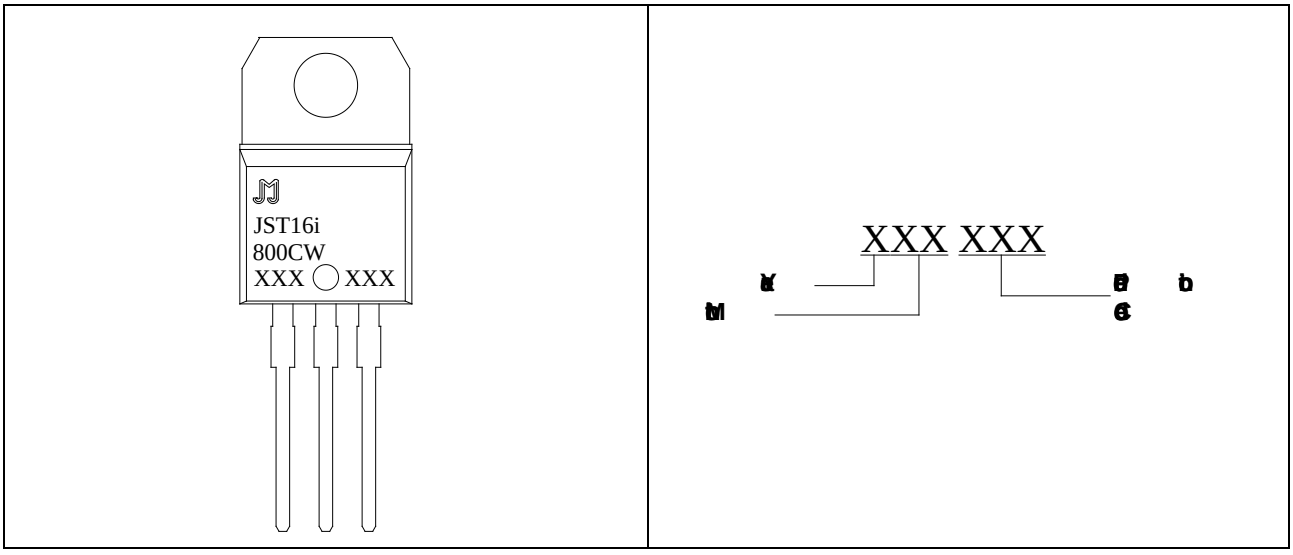


FIG.1: [illegible]
[illegible]

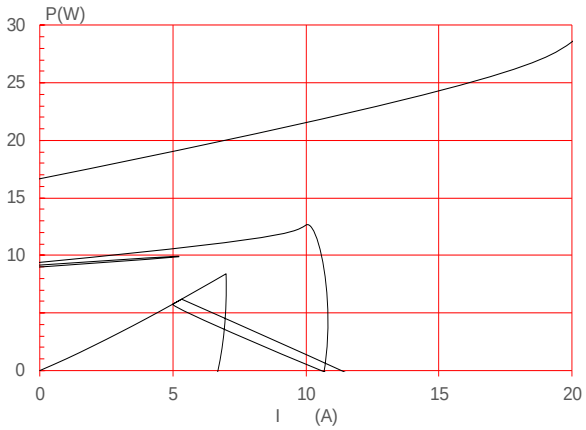


FIG.2: [illegible]
[illegible]


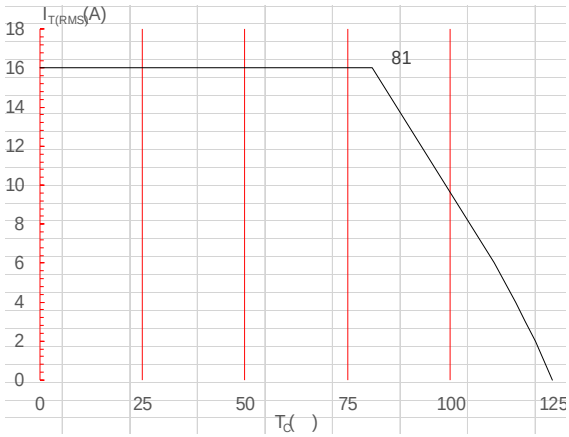


FIG.3: [illegible]
[illegible]

FIG.4: [illegible]

8/20μS current surge
2/10μS voltage surge

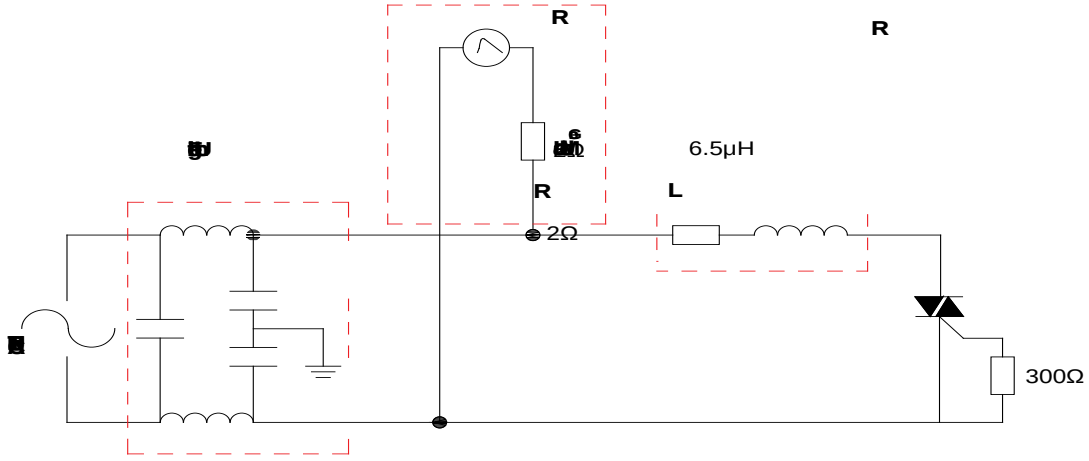

PACKAGE MECHANICAL DATA

