Peak gate power	P_{GM}	10	W
Peak pulse voltage (T_j=25 ; non-repetitive,off-state;FIG.7)	V_{pp}	2.5	kV

ELECTRICAL CHARACTERISTICS (T_j=25 unless otherwise specified)

Symbol	Test Condition	Quadrant	Value		Unit
I_{GT}	V_D =12V R_L =33Ω	- -	MAX.	50	mA
V_{GT}		- -	MAX.	1.3	V
V_{GD}	V_D =V_{DRM} T_j =125 R_L =3.3kΩ	- -	MIN.	0.15	V
I_L	I_G =1.2I_{GT}	-	MAX.	80	mA
				100	
I_H	I_T =500mA		MAX.	75	mA
dV/dt	V_D=400V Gate Open T_j =125		MIN.	2500	V/μs
(dI/dt)c	(dV/dt)c=20V/μs T_j=125		MIN.	25	A/ms
t_{on}	I_G=80mA I_A=400mA I_R=40mA T_j=25		TYP.	10	μs
t_{off}				70	

STATIC CHARACTERISTICS

Symbol	Parameter		Value(MAX.)	Unit
V_{TM}	I_{TM} =42A t_p=380μs	T_j=25	1.5	V
V_{TO}	Threshold voltage	T_j=125	0.72	V
R_D	Dynamic resistance	T_j=125	25	mΩ
I_{DRM}	V_D =V_{DRM} V_R =V_{RRM}	T_j=25	5	μA
I_{RRM}		T_j=125	1.5	mA

THERMAL RESISTANCES

Symbol	Parameter	Value	Unit
$R_{th(j-c)}$			

ORDERING INFORMATION


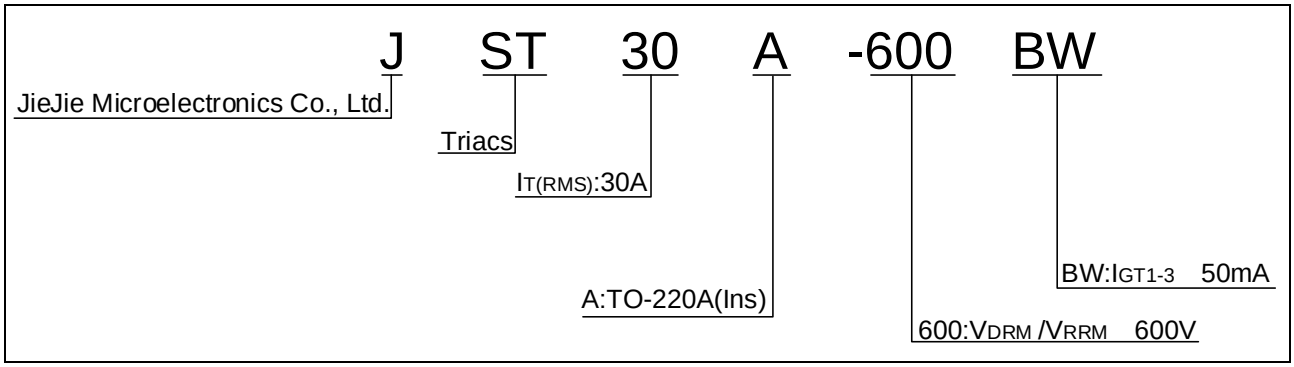


FIG.1: Maximum power dissipation versus RMS on-state current


FIG.2: RMS on-state current versus case temperature

FIG.7 Test circuit for inductive and resistive loads to IEC-61000-4-5 standards

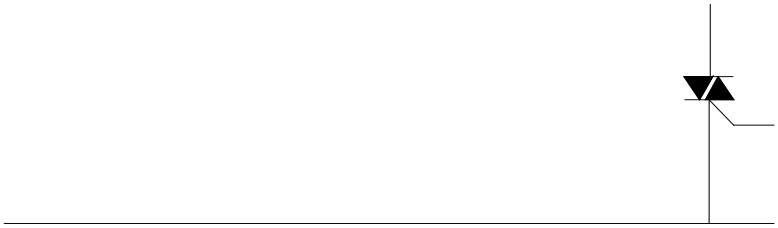

JST30A-600BW

PACKAGE MECHANICAL DATA

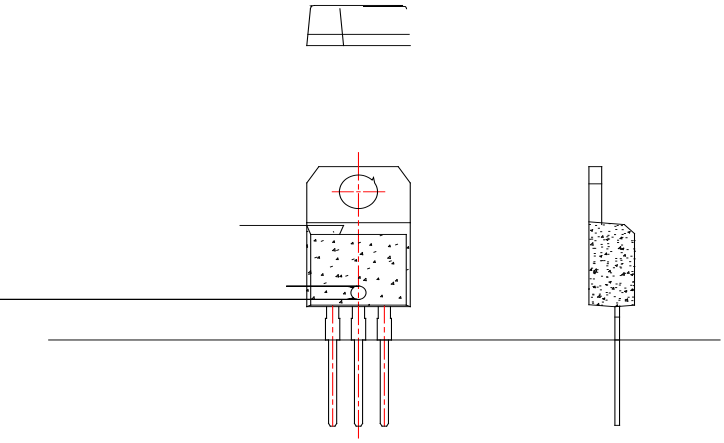

Information furnished in this document is believed to be accurate and reliable. However, Jiangsu JieJie Microelectronics Co., Ltd. assumes no responsibility for the consequences of use without consideration for such information nor use beyond it. Information mentioned in this document is subject to change without notice, apart from that when an agreement is signed, Jiangsu JieJie complies with the agreement.

Products and information provided in this document have no infringement of patents. Jiangsu JieJie assumes no responsibility for any infringement of other rights of third parties which may result from the use of such.