Peak off-state voltage (T_j=25 ; open gate; see FIG. 8)	V_p	4	kV

ELECTRICAL CHARACTERISTICS (T_j=25 unless otherwise specified)

Symbol	Test Condition	Quadrant	Value	Unit
I_{GT}	V_D =12V R_L =33Ω			

ORDERING INFORMATION

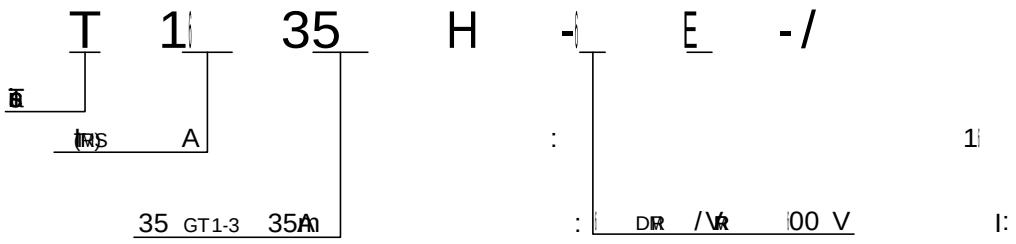


FIG.1 Ma pp RS
o te

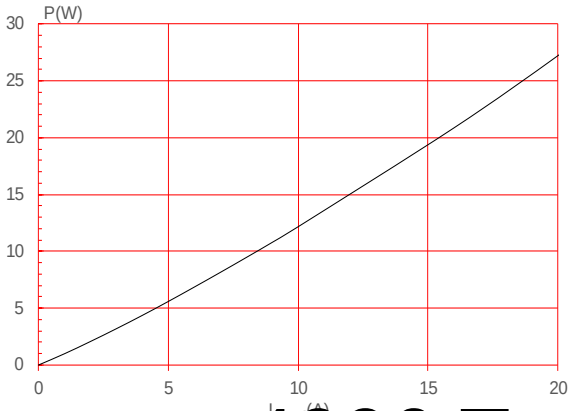


FIG.2: RS -te ea
pn



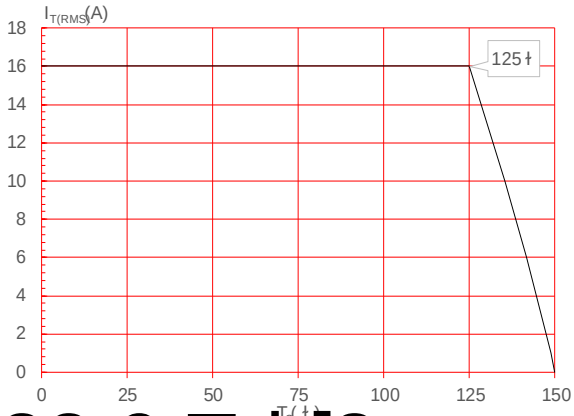


FIG.3: RS - -4006 Tw 0833 0 Td [8-

FIG.7: Ba g
g a
j n

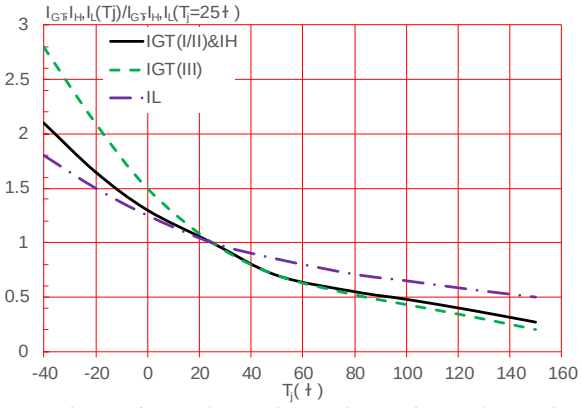

F I G. 8 IEC1000-4-5

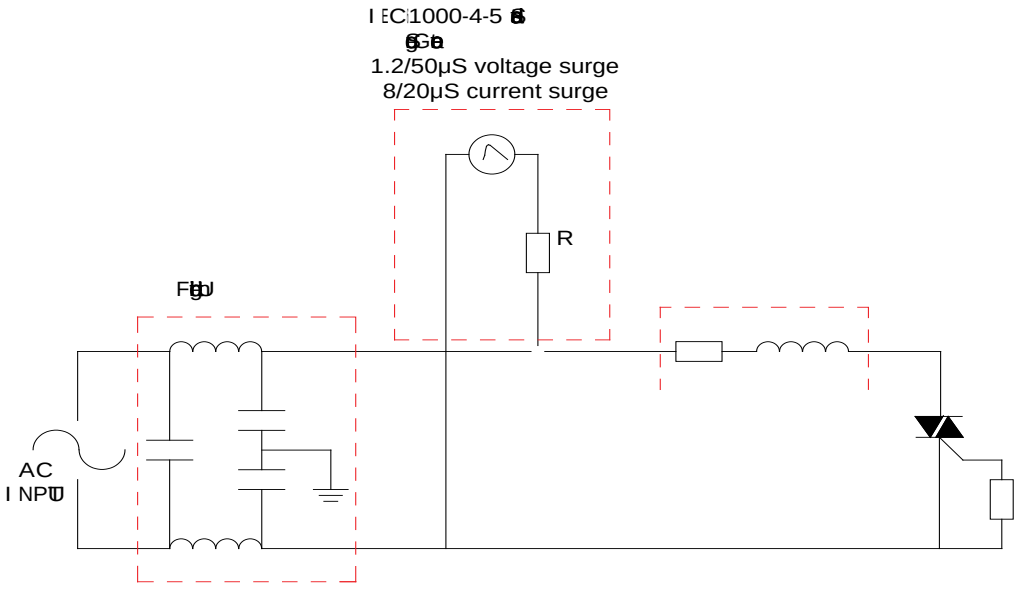

DELIVERY MODE

