




FIG 1: Forward characteristics(per diode)

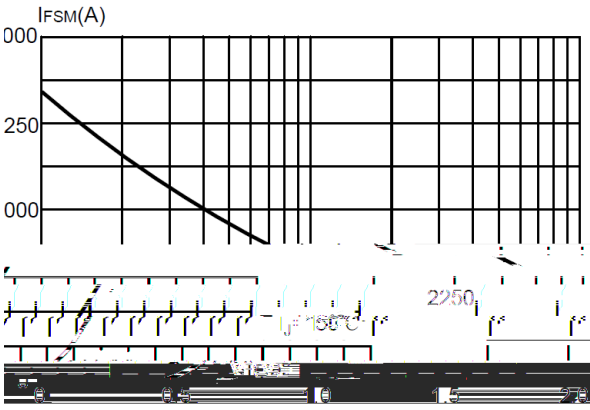


FIG 2: Peak on-state surge current

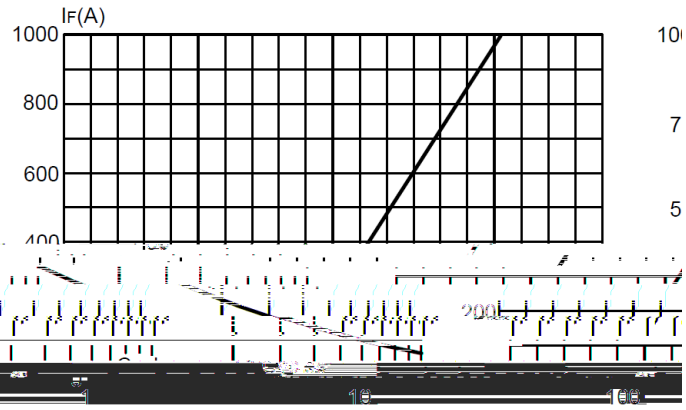


FIG 3: Max. power dissipation(per diode)



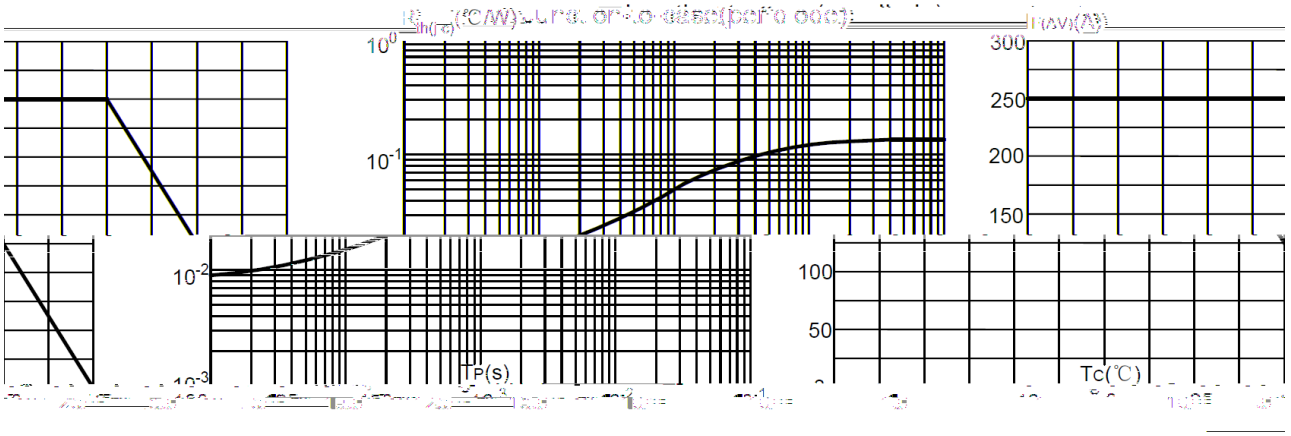


FIG 4: Max. case temperature vs. forward current(per diode)

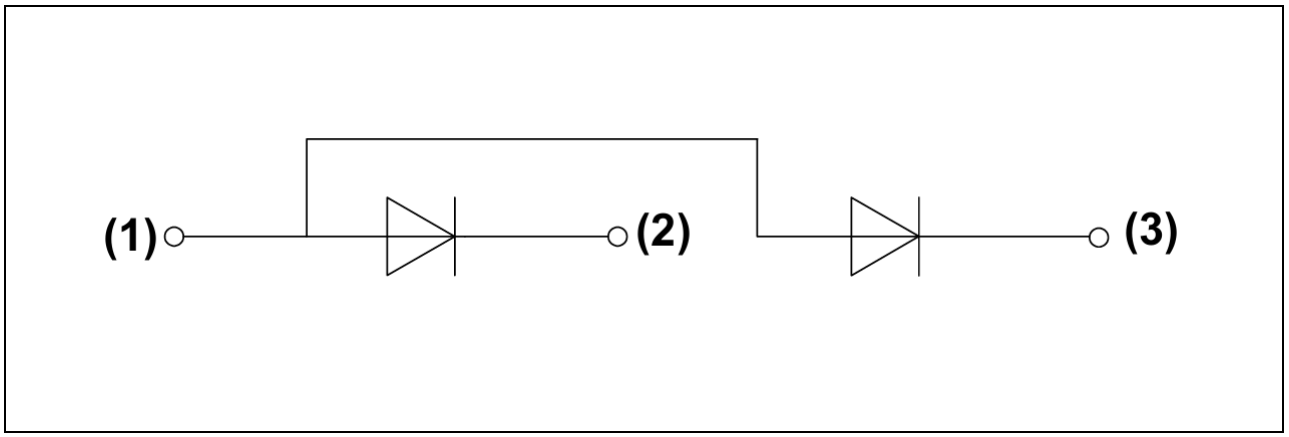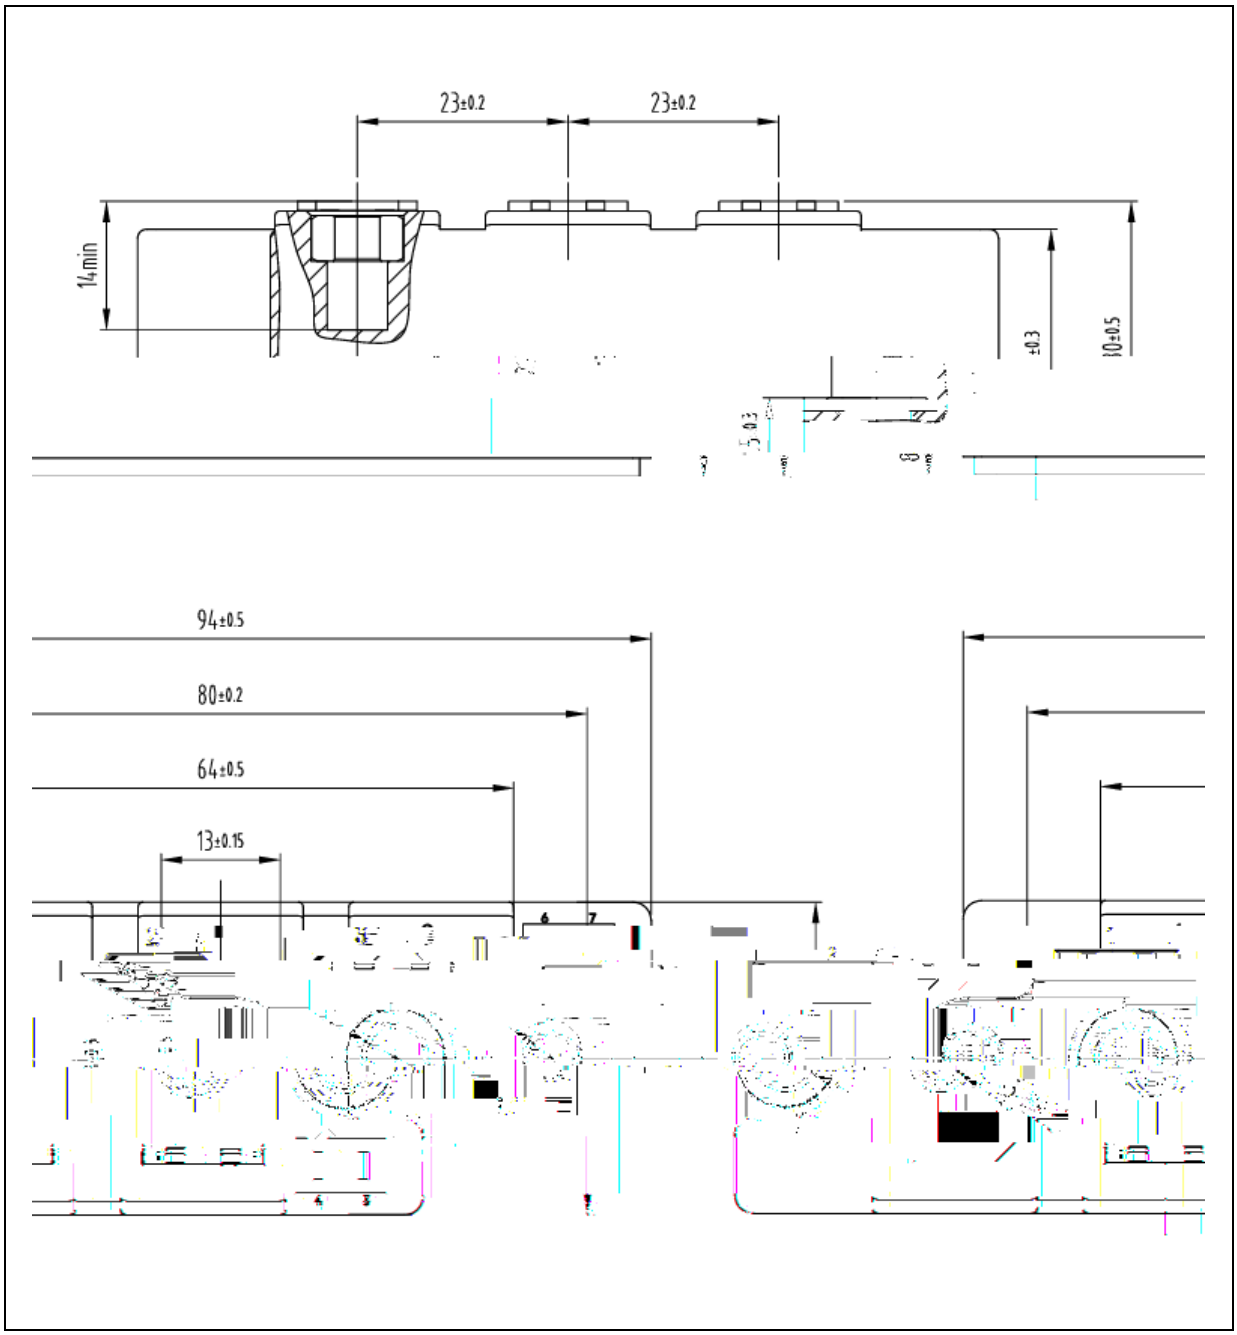


23±0.2
23±0.2
14min
±0.3
10±0.5
94±0.5
80±0.2
64±0.5
13±0.15