

FIG.1: Forward characteristics(per diode)




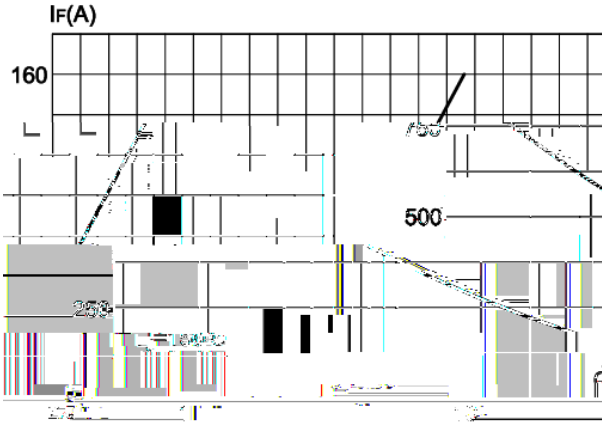



FIG.2: Peak on-state surge current

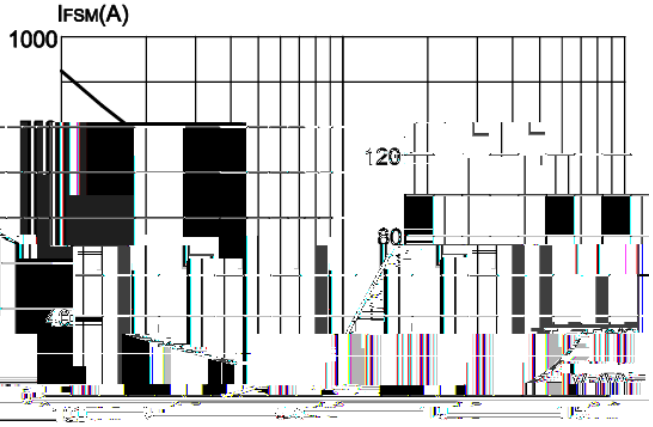

ature **FIG.4:** Maximum transient thermal impedance **FIG.3:** Forward current vs. case temper

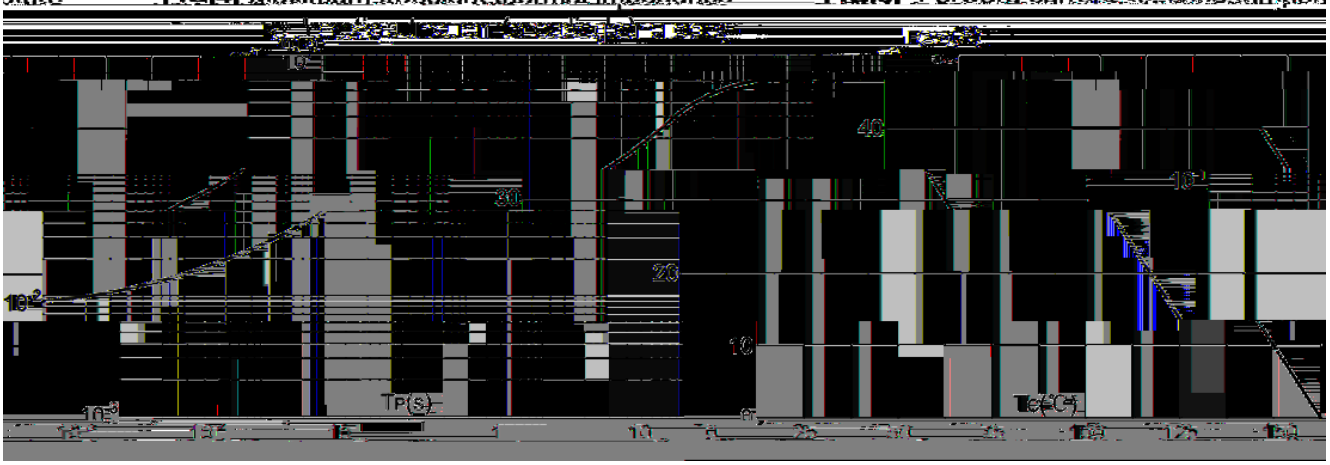

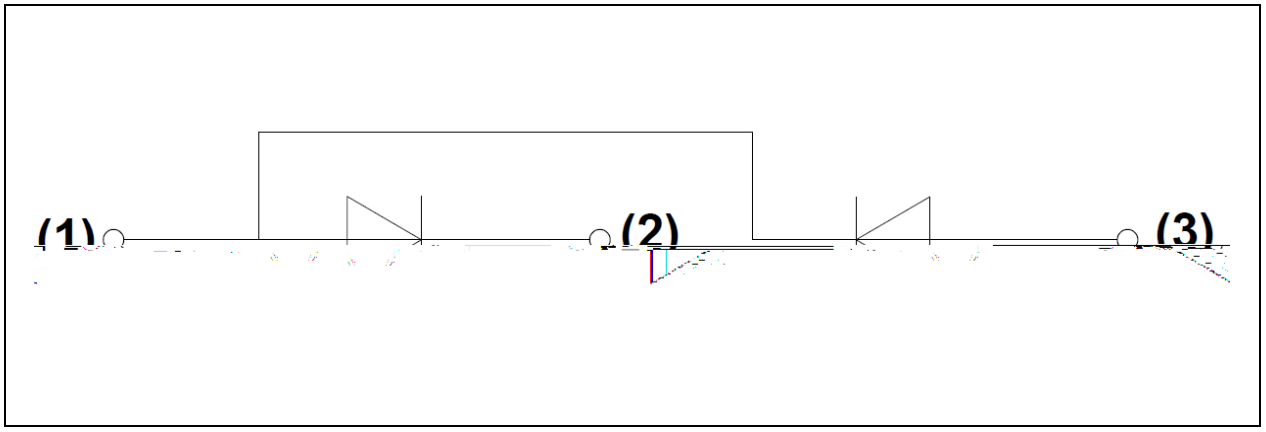

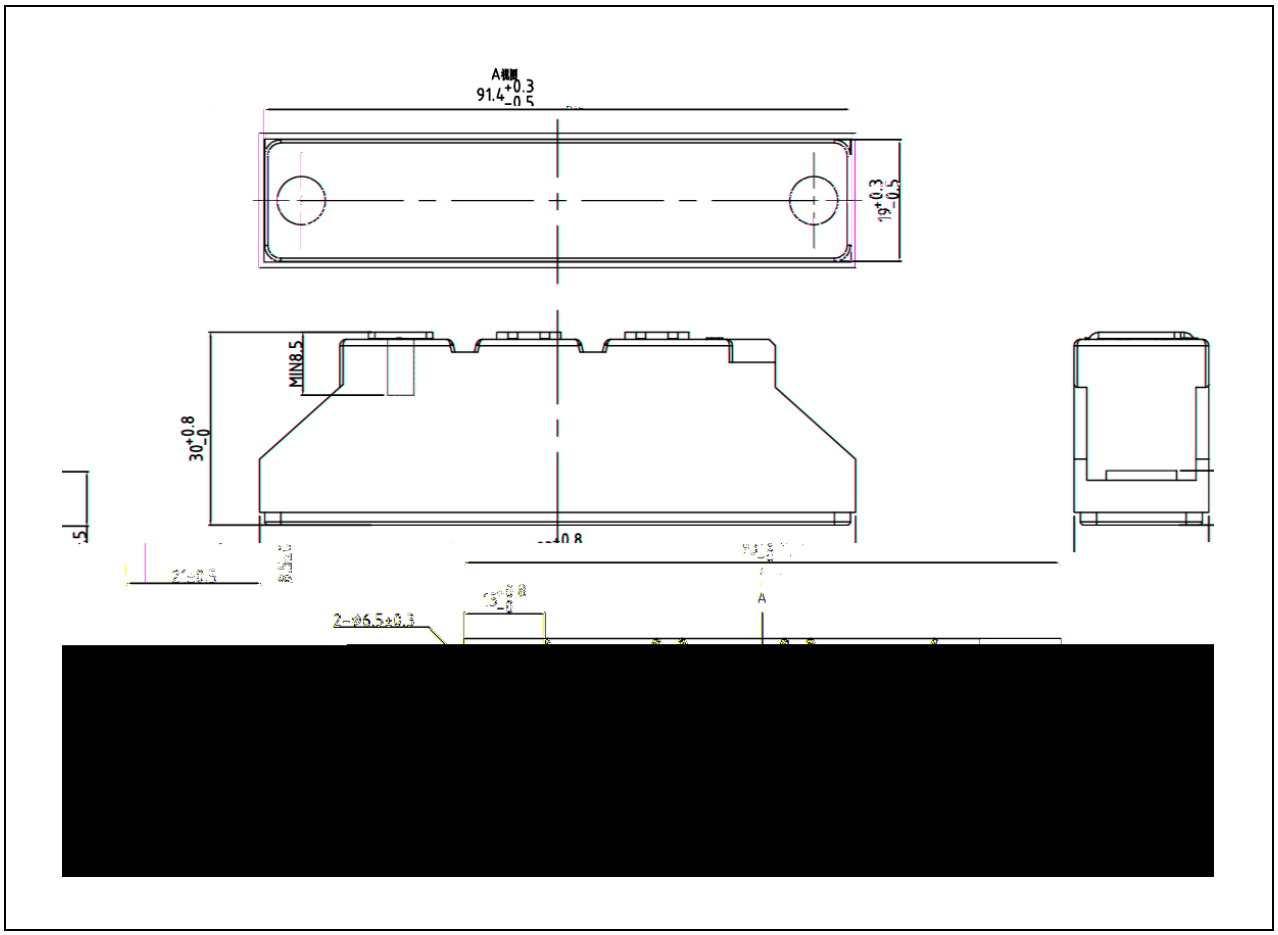
A視圖
91.4+0.3 -0.5
19+0.3 -0.5
MIN8.5
30+0.8 -0
A
2-Ø6.5±0.3