# JMD40KE18T1A

## Features

## Product Summary

## Applications

## Absolute Maximum Ratings

| Parameter | Conditions | Symbol | Values | Unit |
|---|---|---|---|---|
| | | | | |

## Electrical Characteristics

| Parameter | Conditions | Symbol | Values | | | Unit |
|---|---|---|---|---|---|---|
| | | | Min. | Typ. | Max. | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | Ω |

## Thermal Characteristics

## Typical Electrical & Thermal Characteristics

**FIG.1:** Forward characteristics(per diode)

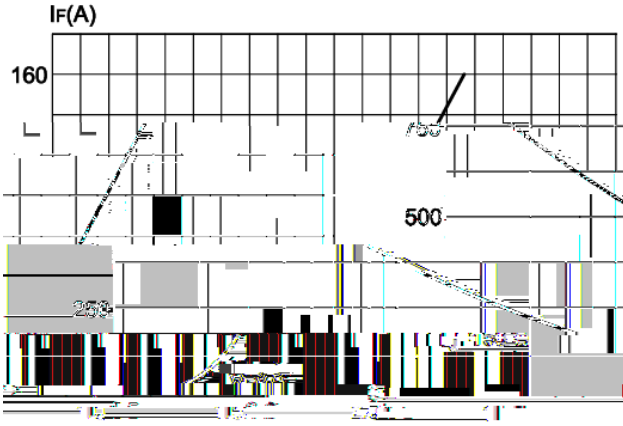
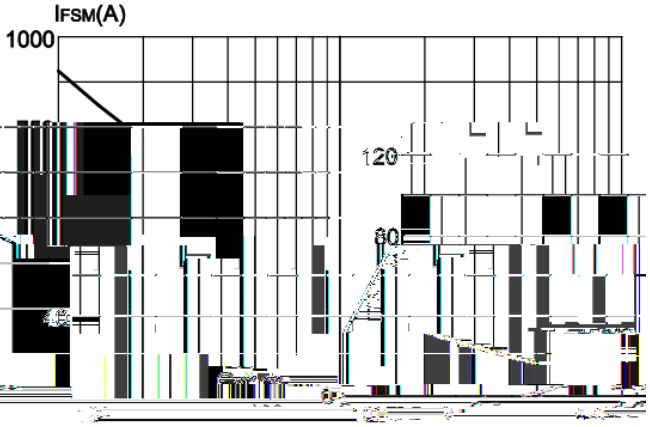


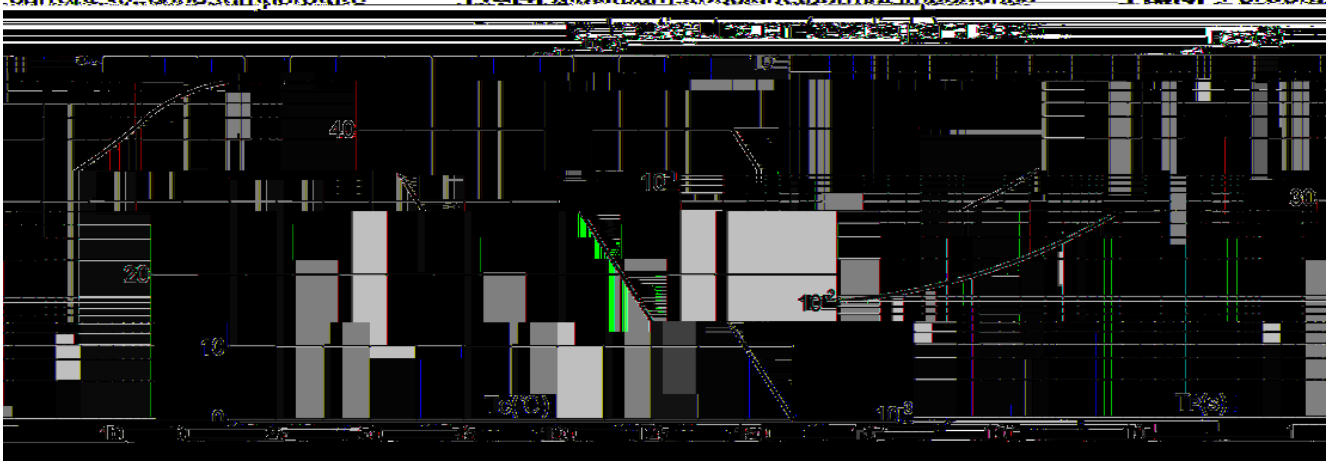

**FIG.2:** Peak on-state surge current



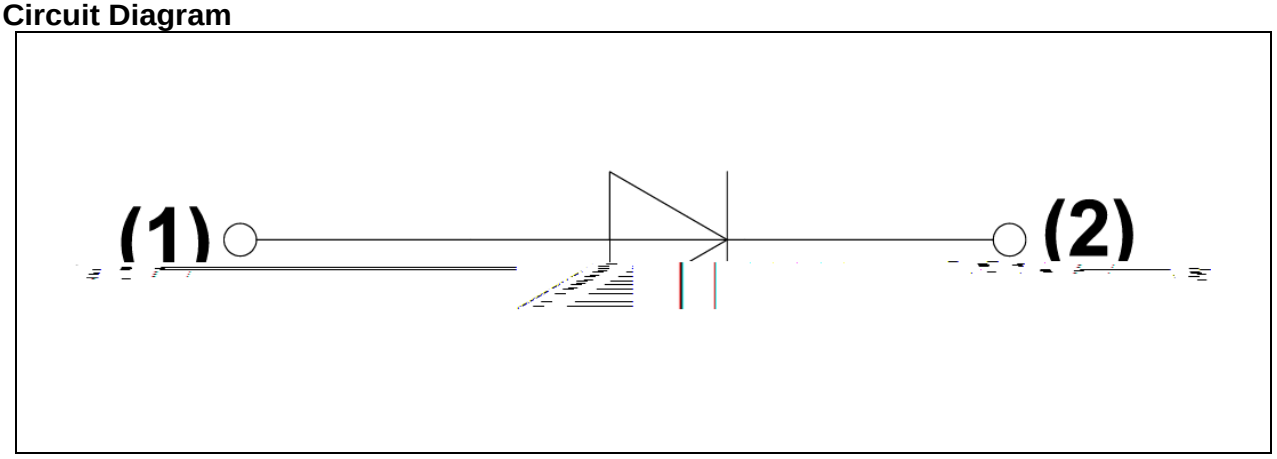

current vs. case temperature

**FIG.4:** Maximum transient thermal impedance

**FIG.3:** Forward




## Circuit Diagram



## Package Outlines (mm)

