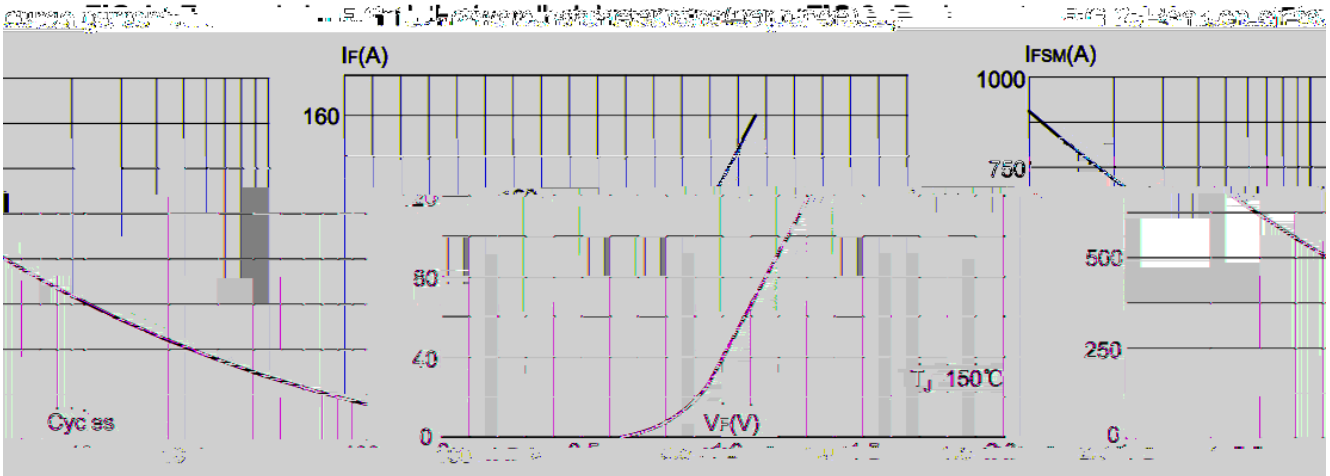
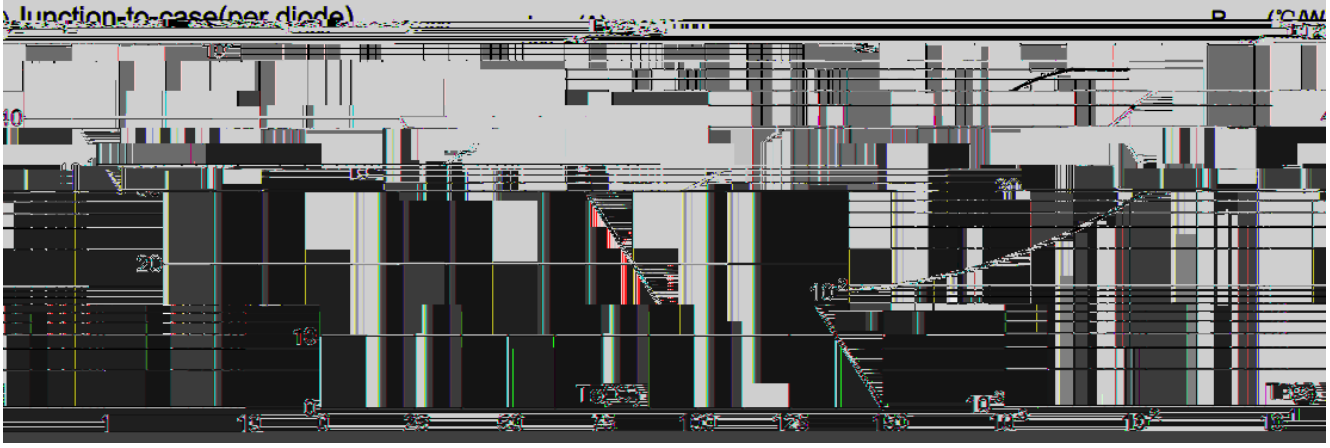
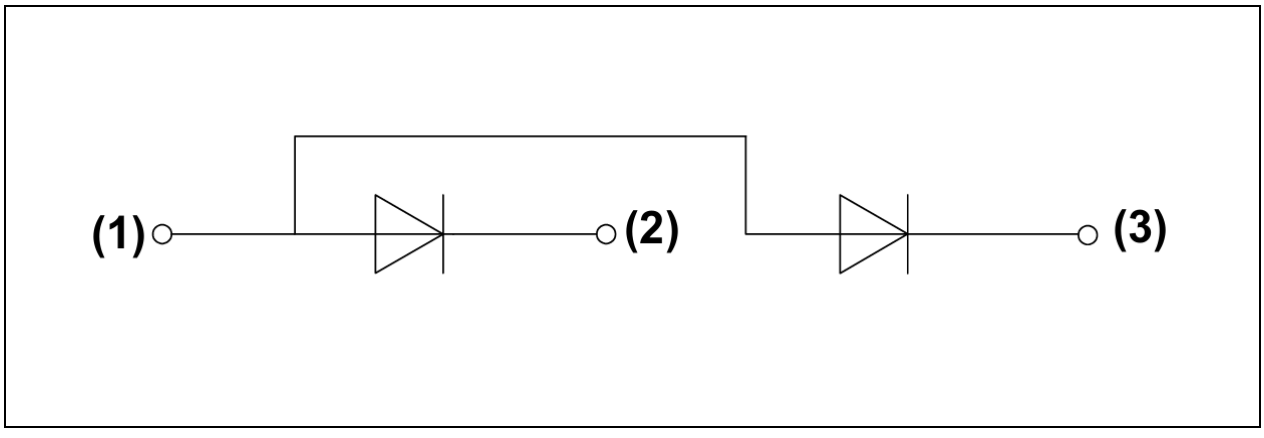


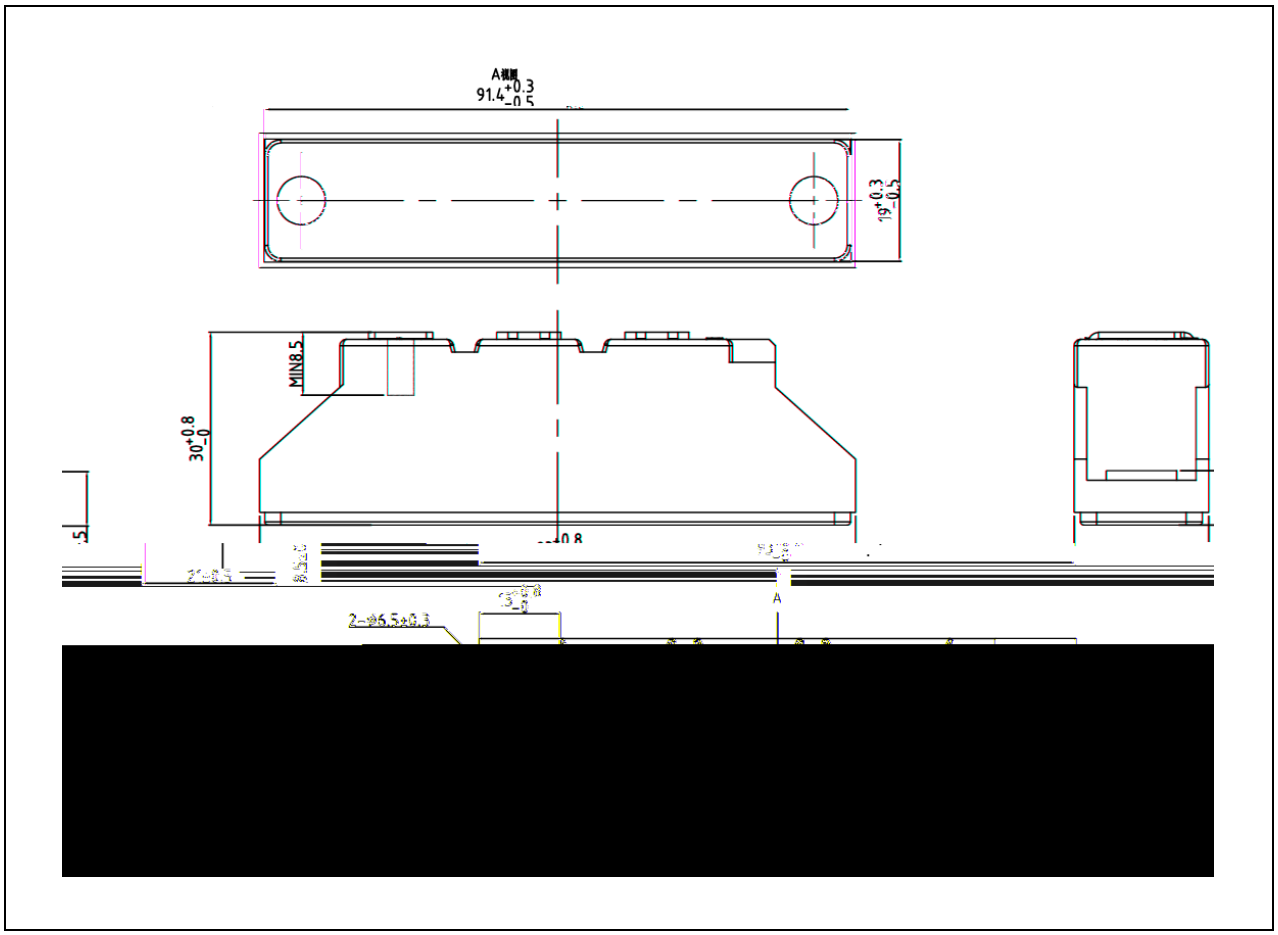

**FIG.3:** Forward current vs. case temperature

**FIG.4:** Max

ximum transient thermal impedance
Junction-to-case(per diode)






A視圖
91.4+0.3 -0.5
19+0.3 -0.5
MIN8.5
30+0.8 -0
A
2-Φ6.5±0.3