
FIG 1: Forward characteristics(per diode)

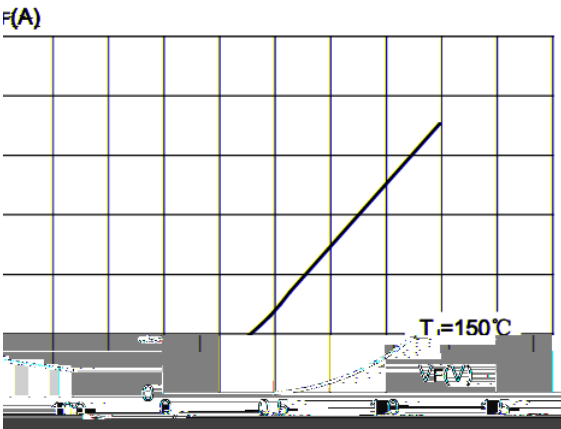


FIG 2: Peak on-state surge current




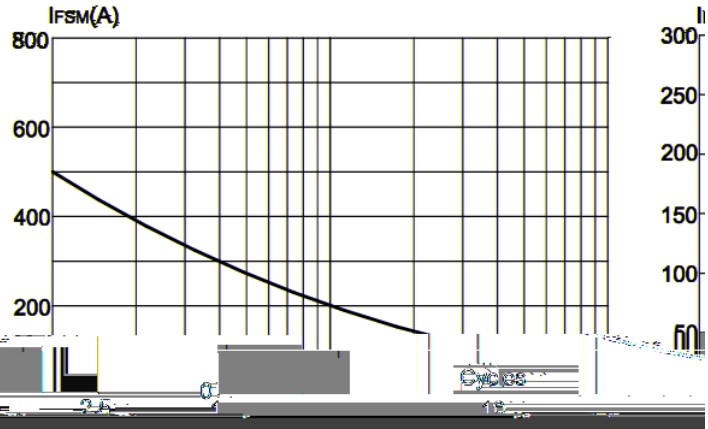


FIG 3: Forward current vs. case temperature

FIG 4: Maximum transient thermal impe

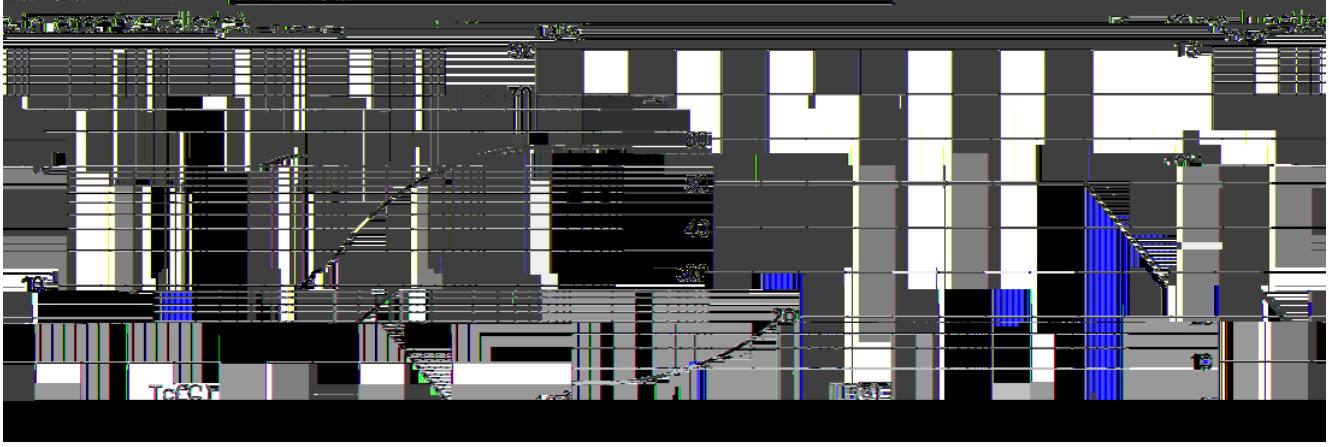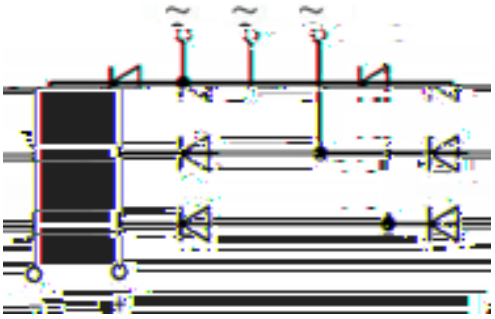

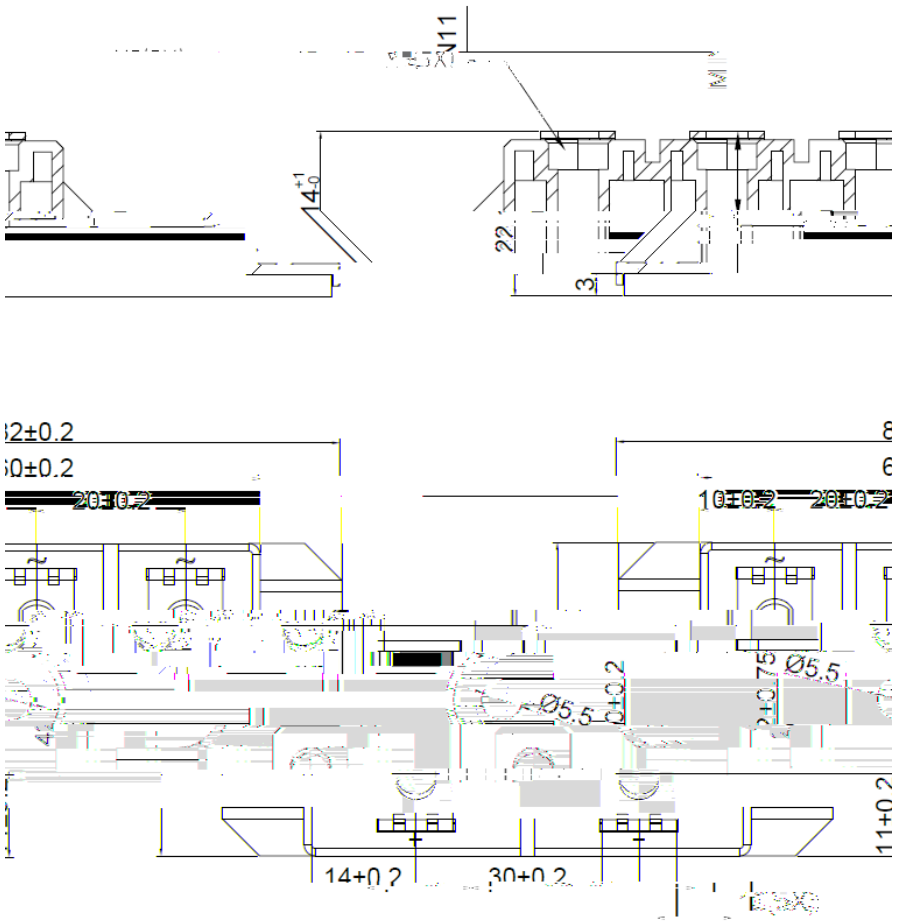


11
14+1
0
22
Ø5.5
14+0.2
30+0.2