JMT160KH16T2

Features

Product Summary

Applications

Absolute Maximum Ratings

Parameter	Conditions	Symbol	Values	Unit

Electrical .0V6(c)55( )]TJETQEMC /Span MCI2 1Lang (enUS)>BDC 0.000008 5 8.04eW*nBTF1 11.0

Ordering Information

Device	Marking	Package	Weight	Inner Box	Per Carton

Typical Electrical & Thermal Characteristics



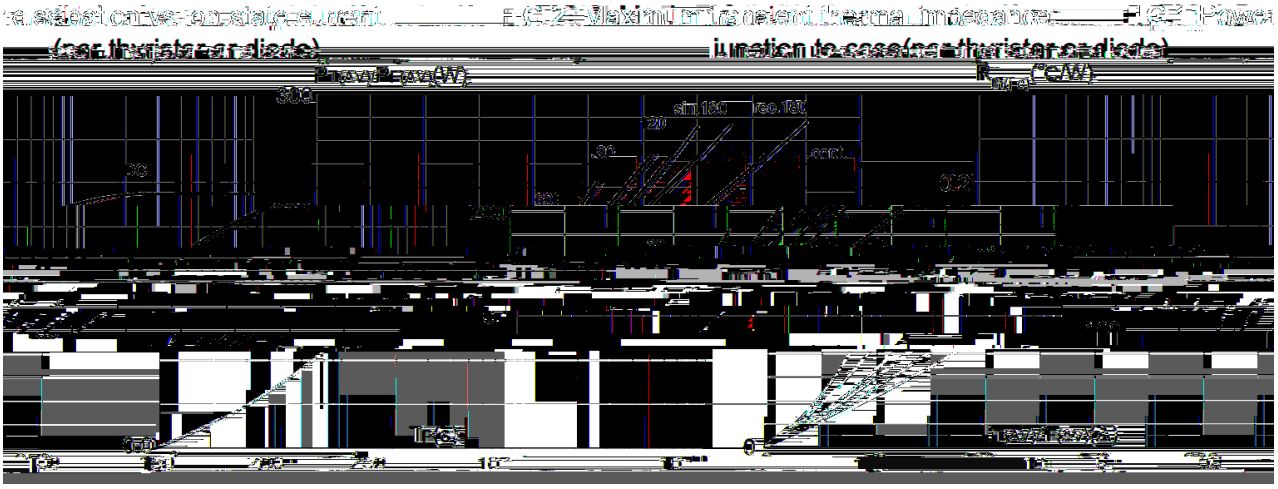


FIG.5 Gate trigger characteristics

FIG.6: Forward current vs. case temperature

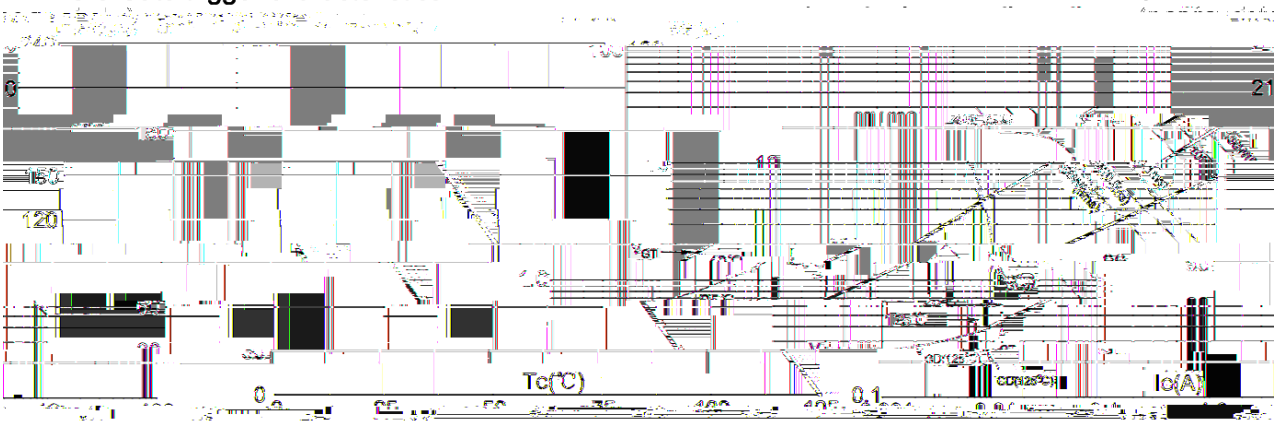

Circuit Diagram

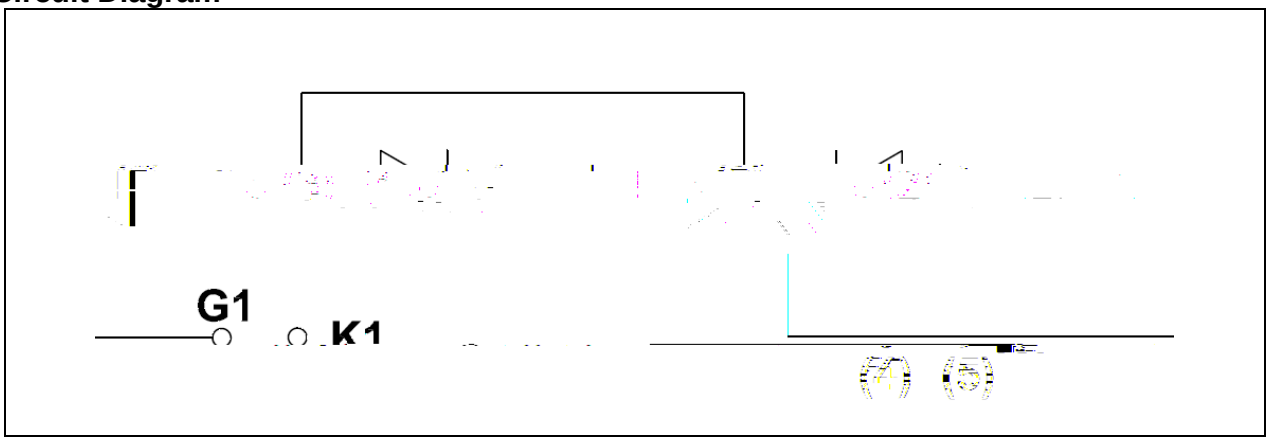

Package Outlines (mm)

