- Package consists of two inverse parallel SCR chips
- Welding and Spot Welding Technology

(@ T_C = 25℃ unless otherwise specified)

All product information are copyrighted and subject to legal disclaimers

JMT72KQ18S1C	JMT72KQ18S1C	S1	10.6g/PCS	120 PCS	1080 PCS

FIG.1: Forward characteristics(per thyristor)



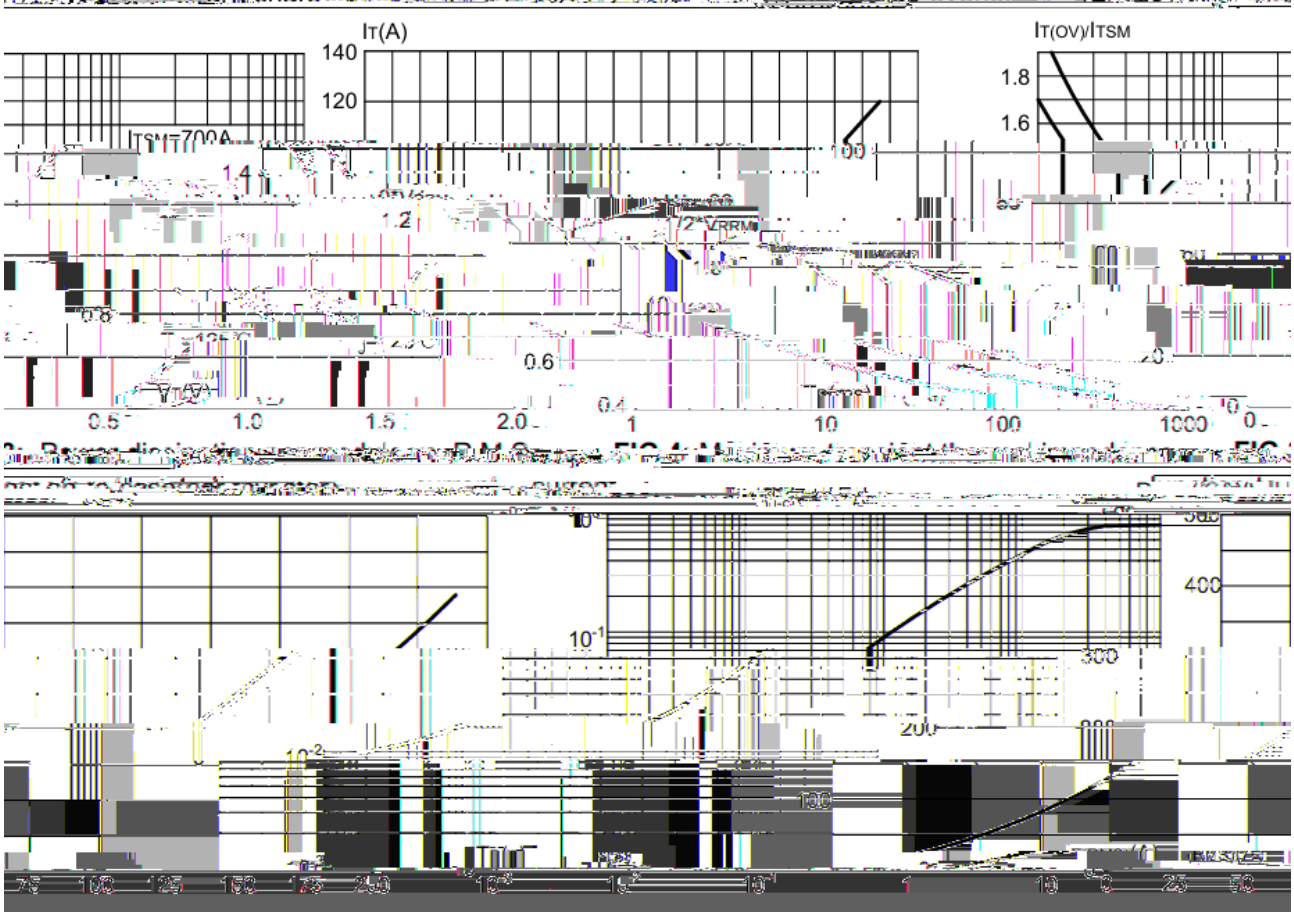


FIG.2: Surge overload current vs. time

Jiangsu JieJie Microelectronics Co., Ltd.
All product information are copyrighted and subject to legal disclaimers

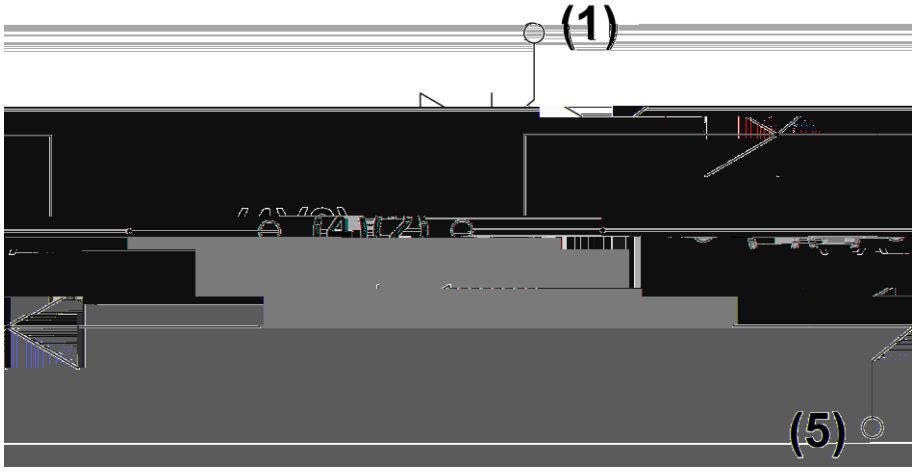

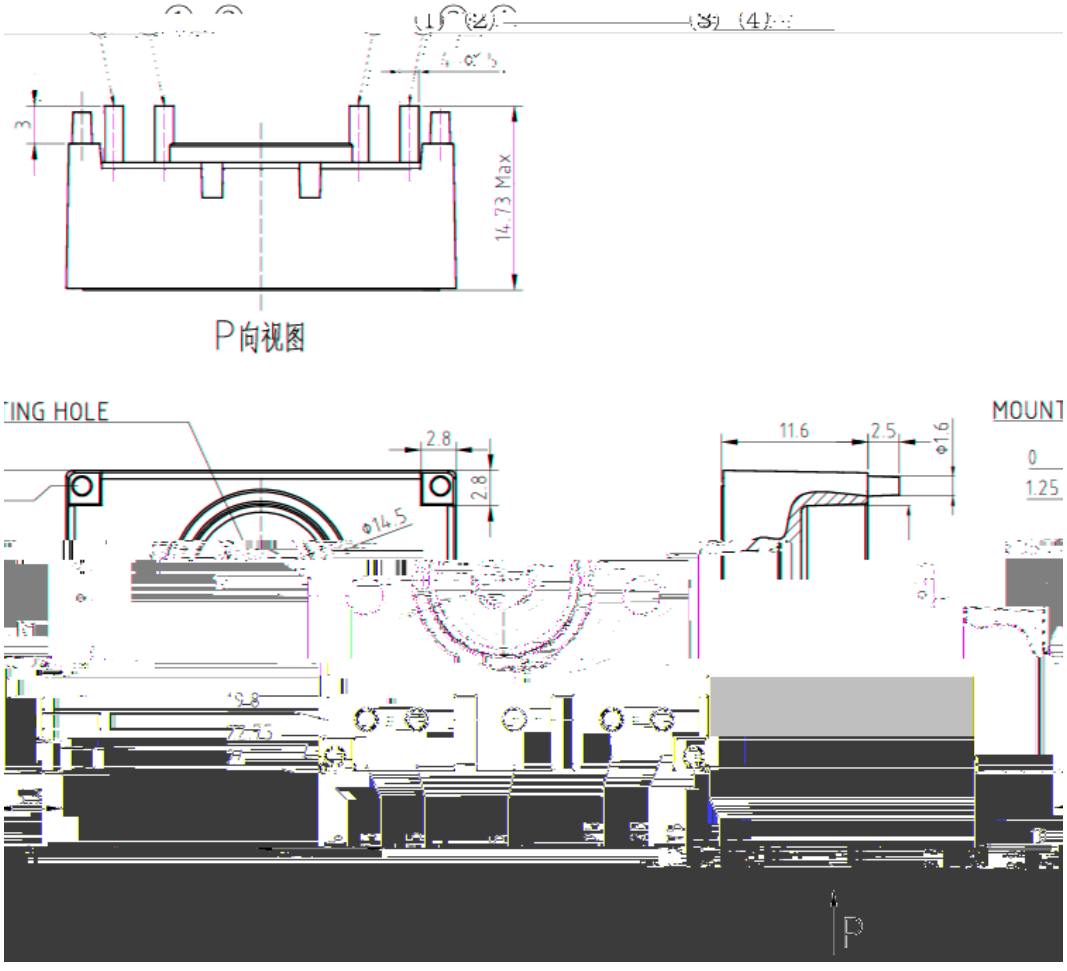

Unit of measurement: mm

All product information are copyrighted and subject to legal disclaimers

All product information are copyrighted and subject to legal disclaimers