JST26Z-800B 25A TRIAC

Rev.A.1.1

The JST26Z-800B triac is suitable for general purpose AC switching. It can be used as an ON/OFF function in applications such as heating regulation, induction motor starting circuits, for phase control operation in light dimmers, motor speed controllers. By using an internal ceramic pad, JST26Z-800B provides a rated insulation voltage of 2500 VRMS, complying with UL standards (File ref: E252906). Package TO-3P is RoHS compliant.

Parameter	Symbol	Value	Unit
Storage junction temperature range	T_{stg}	-40-150	
Operating junction temperature range	T_j	-40-125	
Repetitive peak off-			


Peak pulse voltage (T_j=25 ; non-repetitive,off-state;FIG.7)	V_{pp}	2	kV


(T_j=25 unless otherwise specified)

Symbol	Test Condition	Quadrant	Value		Unit
I_{GT}	V_D=12V R_L=33	- -	MAX.	50	mA
				70	
V_{GT}		ALL	MAX.	1	V
V_{GD}	V_D=V_{DRM} T_j=125 R_L=3.3k	ALL	MIN.	0.2	V
I_L	I_G=1.2I_{GT}	- -	MAX.	80	mA
				120	
I_H	I_T=500mA		MAX.	80	mA
dV/dt	V_D=540V Gate Open T_j=125		MIN.	1000	V s
(dV/dt)c	(dI/dt)c=13.3A/ms, T_j=125		MIN.	12	
t_{on}	I_G=80mA I_A=400mA I_R=40mA T_j=25		TYP.	3	s
t_{off}				50	

Symbol	Parameter		Value(MAX.)	Unit
V_{TM}	I_{TM}=35A t_p=380 s	T_j=25	1.5	V
V_{TO}	Threshold voltage	T_j=125	0.75	V
R_D	Dynamic resistance	T_j=125	18	
I_{DRM}	V_D=V_{DRM} V_R=V_{RRM}	T_j=25	5	A
I_{RRM}		T_j=125	2	mA

Symbol	Parameter	Value	Unit
$R_{th(j-c)}$	junction to case (AC)	1.1	/W

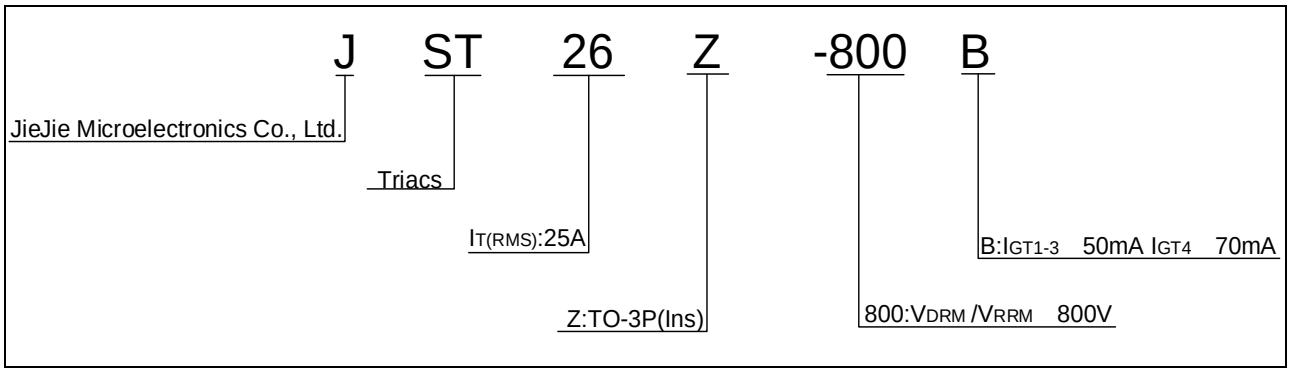
J
ST
26
Z
-800
B
JieJie Microelectronics Co., Ltd.
Triacs
IT(RMS):25A
Z:TO-3P(Ins)
800:VDRM /VRRM 800V
B:IGT1-3 50mA IGT4 70mA

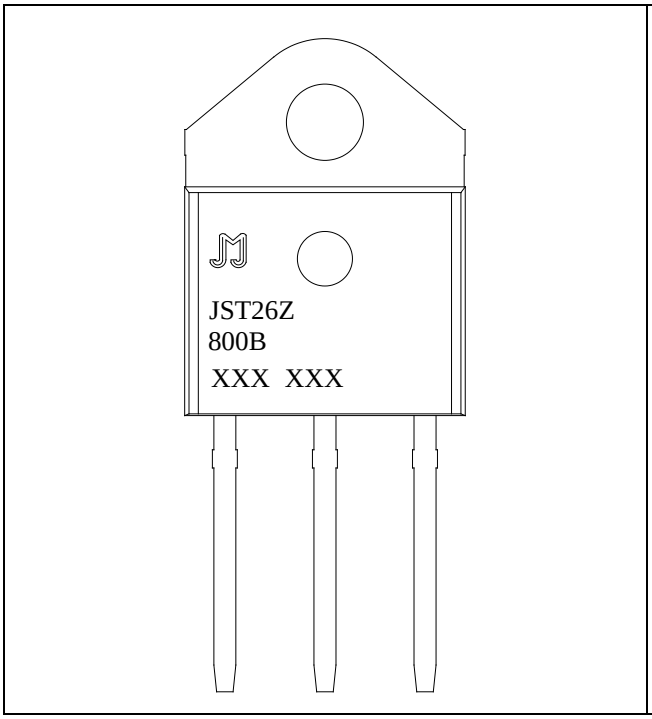
JST26Z
800B
XXX XXX

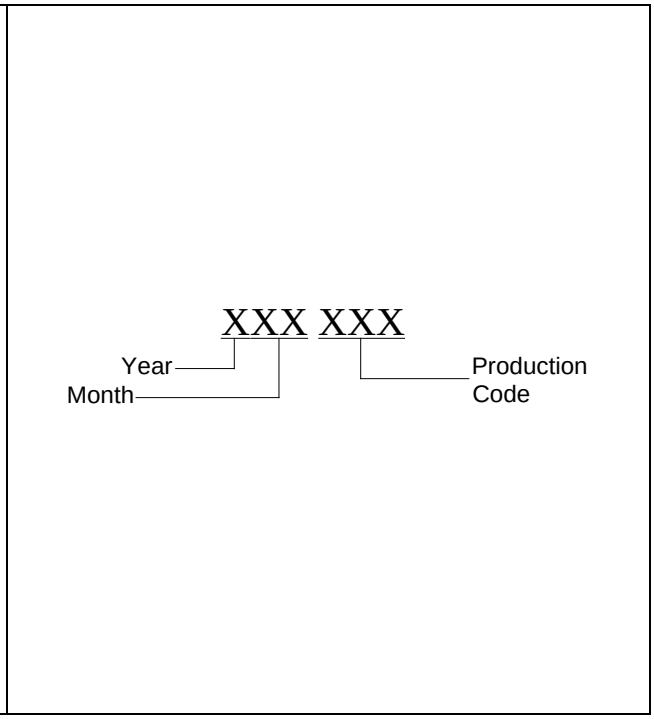

XXX XXX
Year
Month
Production
Code

FIG.1: Maximum power dissipation versus RMS on-state current

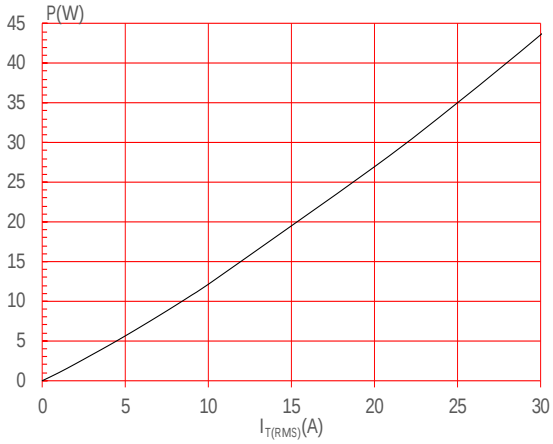


FIG.2: RMS on-state current versus case temperature


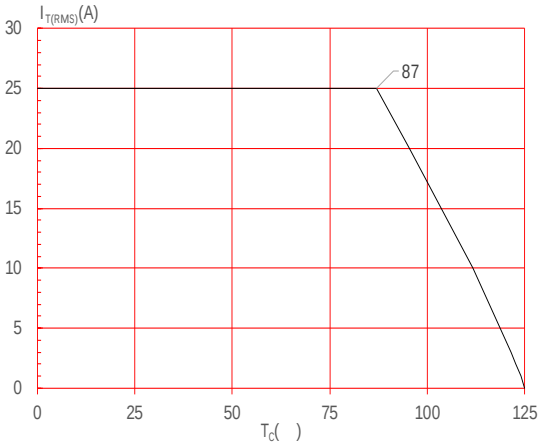


FIG.3: Surge peak on-state current versus number of cycles

FIG.4: On-state characteristics

Order 5.0.011 Tc



Information furnished in this document is believed to be accurate and reliable. However, Jiangsu JieJie Microelectronics Co., Ltd assumes no responsibility for the consequences of use without consideration for such information nor use beyond it. Information mentioned in this document is subject to change without notice, apart from that when an agreement is signed, Jiangsu JieJie complies with the agreement.
Products and information provided in this document have no infringement of patents. Jiangsu JieJie assumes no responsibility for any infringement of other rights of third parties which may result from the use of such products and information. This document supersedes and replaces all information previously